

03 - 28:00

22

Atty. Dkt. No. 57921/105

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicant: Voisin et al.

Title: SYSTEM AND METHOD FOR
ADVERTISING WITH AN
INTERNET VOICE PORTAL

Appl. No.: Unknown

Filing Date: Unknown

Examiner: Unknown

Art Unit: Unknown

CERTIFICATE OF EXPRESS MAILING	
I hereby certify that this correspondence is being deposited with the United States Postal Service's "Express Mail Post Office To Addressee" service under 37 C.F.R. § 1.10 on the date indicated below and is addressed to: Assistant Commissioner for Patents, Washington, D.C., 20231.	
EL529676533US (Express Mail Label Number)	3/21/2000 (Date of Deposit)
Chris Escaville (Printed Name)	
Chris Escaville (Signature)	

UTILITY PATENT APPLICATION
TRANSMITTALAssistant Commissioner for Patents
Box PATENT APPLICATION
Washington, D.C. 20231

Sir:

Transmitted herewith for filing under 37 C.F.R. § 1.53(b) is the nonprovisional utility patent application of:

Craig Douglas Voisin
Matthew Nelson Armstrong
Steven Jeromy Carriere
Steven Gregory Woods
Alexander E. Quilici

Enclosed are:

- ☒ [X] Specification, Claim(s), and Abstract (81 pages).
- ☒ [X] Informal drawings (38 sheets, Figures 1-43).
- ☒ [X] Declaration and Power of Attorney (4 pages).
- ☒ [X] Assignment of the invention to Quack.com.
- ☒ [X] Assignment Recordation Cover Sheet.
- ☒ [X] Check in the amount of \$40.00 for Assignment recordation.
- ☒ [X] Small Entity statement.

☐ Information Disclosure Statement.

☐ Form PTO-1449 with copies of ___ listed reference(s).

The filing fee is calculated below:

	Claims as Filed	Included in Basic Fee	Extra Claims	Rate	Fee Totals
Basic Fee				\$690.00	\$690.00
Total Claims:	51	- 20	= 31	x \$18.00	= \$558.00
Independents:	6	- 3	= 3	x \$78.00	= \$234.00
If any Multiple Dependent Claim(s) present:			+	\$260.00	= \$0.00
				SUBTOTAL:	= \$1482.00
<input checked="" type="checkbox"/> Small Entity Fees Apply (subtract 1/2 of above):				=	\$741.00
				TOTAL FILING FEE:	= \$741.00

☒ A check in the amount of \$741.00 to cover the filing fee is enclosed.

☐ The required filing fees are not enclosed but will be submitted in response to the Notice to File Missing Parts of Application.

☒ The Assistant Commissioner is hereby authorized to charge any additional fees which may be required regarding this application under 37 C.F.R. §§ 1.16-1.17, or credit any overpayment, to Deposit Account No. 06-1447. Should no proper payment be enclosed herewith, as by a check being in the wrong amount, unsigned, post-dated, otherwise improper or informal or even entirely missing, the Assistant Commissioner is authorized to charge the unpaid amount to Deposit Account No. 06-1447.

Please direct all correspondence to the undersigned attorney or agent at the address indicated below.

Respectfully submitted,

Date March 21, 2000

By



FOLEY & LARDNER
Firststar Center
777 East Wisconsin Avenue
Milwaukee, Wisconsin 53202-5367
Telephone: (414) 297-5728
Facsimile: (414) 297-4900

Paul S. Hunter
Attorney for Applicant
Registration No. 44,787

APPLICANT OR PATENTEE: Craig Douglas Voisin et al. Docket No.: 57921/105
SERIAL OR PATENT NO.: _____
FILED OR ISSUED: _____
FOR: SYSTEM AND METHOD FOR ADVERTISING WITH AN INTERNET VOICE PORTAL

**STATEMENT CLAIMING
SMALL ENTITY STATUS (37 CFR 1.9(f) and 1.27(c))
SMALL BUSINESS CONCERN**

I hereby declare that I am:

- ☐ the owner of the small business concern identified below.
☒ an official of the small business concern empowered to act on behalf of the concern identified below.

NAME OF CONCERN: Quack.com

ADDRESS OF CONCERN: 1252 Borregas Avenue, Sunnyvale, California 94089

I hereby declare that the above identified small business concern qualifies as a small business concern as defined in 13 CFR 121.3-18, and reproduced in 37 CFR 1.9(d), for purposes of paying reduced fees under Section 41(a) and (b) of Title 35, United States Code, in that the number of employees of the concern, including those of its affiliates, does not exceed 500 persons. For purposes of this statement, (1) the number of employees of the business concern is the average over the previous fiscal year of the concern of the persons employed on a full-time, part-time or temporary basis during each of the pay periods of the fiscal year, and (2) concerns are affiliates of each other when either, directly or indirectly, one concern controls or has the power to control the other, or a third party or parties controls or has the power to control both.

I hereby declare that rights under contract or law have been conveyed to and remain with the small business concern identified above with regard to the invention, entitled:

SYSTEM AND METHOD FOR ADVERTISING WITH AN INTERNET VOICE PORTAL

by inventor(s) Craig Douglas Voisin et al.
described in:

- ☒ the specification filed herewith
☐ application serial no. _____, filed _____
☐ patent no. _____, issued _____

If the rights held by the above-identified small business concern are not exclusive, each individual, concern or organization having rights to the invention is listed below* and no rights to the invention are held by any person, other than the inventor, who would not

qualify as a small business concern under 37 CFR 1.9(d) or a nonprofit organization under 37 CFR 1.9(e). NOTE: Separate verified statements are required from each named person, concern or organization having rights to the invention averring to their status as small entities. (37 CFR 1.27)

NAME: _____

ADDRESS: _____

☐ Individual ☐ Small Business Concern ☐ Nonprofit Organization

NAME: _____

ADDRESS: _____

☐ Individual ☐ Small Business Concern ☐ Nonprofit Organization

I acknowledge the duty to file, in this application or patent, notification of any change in status resulting in loss of entitlement to small entity status prior to paying, or at the time of paying, the earliest of the issue fee or any maintenance fee due after the date on which status as a small entity is no longer appropriate. (37 CFR 1.28(b))

I hereby declare that all statements made herein are of my own knowledge, are true and that all statements made on information and belief are believed to be true; and further, that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application, any patent issuing thereon, or any patent to which this verified statement is directed.

NAME OF PERSON SIGNING: _____

Alex Quilici

TITLE OF PERSON OTHER THAN OWNER: _____

President and CEO

SIGNATURE _____

[Signature]

DATE

3/17/00

U.S. PATENT APPLICATION

For

**SYSTEM AND METHOD FOR ADVERTISING WITH AN
INTERNET VOICE PORTAL**

Inventors: Craig Douglas Voisin

Matthew Nelson Armstrong

Steven Jeromy Carriere

Steven Gregory Woods

Alexander E. Quilici

SYSTEM AND METHOD FOR ADVERTISING WITH AN INTERNET VOICE PORTAL

BACKGROUND OF THE INVENTION

The present invention relates generally to the Internet and electronic commerce, or "e-commerce." More particularly, the present invention relates to a system and method for advertising with an Internet voice portal.

5 The Internet has developed into a medium by which a person using a computer connected to the Internet can access voluminous amounts of information. The ability to access information via the Internet can be provided in a variety of different ways. Sometimes information is provided by Internet search engines, which typically search the Internet for key words or phrases and then provide a list of web sites which include the search words or phrases in the web page, such as, its
10 text or embedded identifiers (e.g., metatags). Information is also accessible via the Internet by individual web sites. Individual web sites provide a wide variety of information and services which are both time-critical and not time dependent.

The Internet is especially conducive to conducting electronic commerce. Many Internet servers have been developed through which vendors can
15 advertise and sell their products or services. Such products or services may include items (e.g., music) that are delivered electronically to the purchaser over the Internet and items (e.g., books) that are delivered through conventional distribution channels (e.g., a common carrier). The services can include providing information (e.g., weather, traffic, movies, cost comparisons) that is available over the Internet
20 and transactions (e.g., stock trading, restaurant reservations) that are carried out over the Internet.

Unfortunately, while the Internet provides users with the potential to access a tremendous amount of information, finding useful Internet-based

information is often time-consuming and cumbersome. Further, it is difficult to find and compare the same information available at multiple individual web sites because the same information can be organized in many different ways, described in many different forms, and changed at many different times. Added to these inherent

5 difficulties with the Internet is the simple fact that a person cannot access the information available on the Internet without having a computer or other such electronic device which is connected to the Internet via an Internet Service Provider (ISP). Furthermore, to effectively find desired Internet-based information, a person must learn how to locate information via the Internet. As such, persons without

10 computers, people without connections to ISPs, and people without experience or training on use of the Internet are limited from access to Internet-based information. These factors contribute to reasons why industry experts estimate that by the end of 1999, only 30% of the United States population has ever accessed the Internet, or "surfing the web." (Statistics from Forrester Research, October 1999).

15 Hence, it is desirable to provide a system and method by which people can access Internet-based information without directly using a computer, having a personal ISP connection, or gaining experience or training on use of the Internet. In addition, it is desirable to provide a system and method which allows people to obtain Internet-based information using convenient and readily available

20 means, such as, by way of voice over a public telephone. Further, it is desirable to provide a system and method which allows advertising with an Internet voice portal.

Many challenges have heretofore made such a system and method impossible. For example, people using such a system and method would want to have the information quickly or, at least, within some tolerable amount of time.

25 Such speed is difficult. Even with conventionally high speed computers and fast communication connections, the delay required to access the Internet has made many people call it the "world wide wait." Another challenge to such a system and method is the recognition of voice communications. Conventional voice recognition technology is slow and inaccurate. Convenient and meaningful access to Internet-

based information by voice would require simple, quick, and accurate voice recognition. Nevertheless, known processors and memory devices do not allow quick access to the large vocabularies and processing speeds which would be necessary for voice recognition as done in human-to-human interaction.

5 Yet another challenge to such a system and method is how to provide free access to Internet-based information while financially supporting the service. Conventional advertising on the Internet requires the ability to see advertising information, such as "banners", and make some manual selection, such as "clicking" the banner, to get more information on the advertised product or service.

10 Therefore, in addition to the above-mentioned capabilities, it is desirable to provide a system and method by which people can gain quick and accurate voice access to Internet-based information free of charge. It is further desirable to provide a system and method by which advertisements can be effectively made with an Internet voice portal.

15
BRIEF SUMMARY OF THE INVENTION

One aspect of an embodiment of the invention is a method of advertising. The method includes maintaining an Internet-related communication session between a user and a portal and, during the communication session, selectively providing advertisements based on any one of user constraints and sales
20 criteria.

Briefly, another aspect of an embodiment of the invention is a service which provides audio advertisements over a two way communication device during a communication session. The service includes a user interface and an advertising subsystem. The user interface coordinates communication of the service with a
25 user. The advertising subsystem is coupled to the user interface and is configured to coordinate the selective presentation of advertisements to the user. The

advertisements include sponsorship advertisements which accompany each communication session, advertisements selectively played based on particular attributes of the user, and advertisements selectively played based on permission by the user.

5 Briefly, another aspect of an embodiment of the invention is a system for advertising using voice control. The system includes means for maintaining a communication session between a user and a portal and means for providing advertisements during the communication session based on any one of user constraints and sales criteria.

10 Briefly, another aspect of an embodiment of the invention is a method of advertising including generating a set of possible advertisements which are related to a context, ordering the set of possible advertisements based on a sales criteria associated with each advertisement of the set of possible advertisements, and providing advertisements from the set of possible advertisements based on the
15 ordering.

 Briefly, another aspect of an embodiment of the invention is a system of advertising including means for generating a set of possible advertisements which are related to a context, means for ordering the set of possible advertisements based on a sales criteria associated with each advertisement of the set of possible
20 advertisements, and means for providing advertisements from the set of possible advertisements based on the ordering.

 Briefly, another aspect of an embodiment of the invention is a computer program product including computer readable program code for advertising with an Internet portal. The program code in the computer program
25 product includes first computer readable program code for generating a set of possible advertisements, second computer readable program code for ordering the set of possible advertisements based on a sales criteria associated with each advertisement of the set of possible advertisements, and third computer readable

program code for providing advertisements from the set of possible advertisements based on the ordering.

Other principle features and advantages of the present invention will become apparent to those skilled in the art upon review of the following drawings,
5 the detailed description, and the appended claims.

BRIEF DESCRIPTION OF THE DRAWINGS

The invention is illustrated by way of example and not limitation in the figures of the accompanying drawings, in which like references indicate similar elements and in which:

FIGURE 1 is a general diagrammatical representation of a voice
10 portal connected to the Internet;

FIGURE 2 is a general functional block diagram of an exemplary functional embodiment of the voice portal of FIGURE 1;

FIGURE 3 is a more detailed block diagram of an exemplary physical embodiment of the voice portal of FIGURE 1;

15 FIGURE 4 is a diagrammatical representation of an exemplary data structure model used by the voice portal of FIGURE 1;

FIGURE 5 is a diagrammatical representation of the exemplary data structure model of FIGURE 4 for user related information;

20 FIGURE 6 is a diagrammatical representation of the exemplary data structure model of FIGURE 4 for advertising related information;

FIGURE 7 is a flow diagram illustrating an exemplary creation process of the exemplary data structure model of FIGURE 4;

FIGURE 8 is a diagrammatical representation of the exemplary creation process of FIGURE 7;

FIGURE 9 is a flow diagram illustrating an exemplary process of gathering Internet-based information using non-programming means;

FIGURE 10 is a diagrammatical representation of an exemplary process of the non-programming development of rules associated with the voice portal of FIGURE 1;

FIGURE 11 is an exemplary graphical user interface for the non-programming development of rules associated with the voice portal of FIGURE 1;

FIGURE 12 is an exemplary graphical user interface window used in the non-programming development of rules associated with the voice portal of FIGURE 1;

FIGURE 13 is an expanded form of the graphical user interface window of FIGURE 12;

FIGURE 14 is an exemplary graphical user interface search data editor window used in the non-programming development of rules associated with the voice portal of FIGURE 1;

FIGURE 15 is an exemplary graphical user interface window used in the non-programming development of rules associated with the voice portal of FIGURE 1;

FIGURE 16 is an expanded form of the graphical user interface window of FIGURE 15;

FIGURE 17 is an exemplary graphical user interface window used in the non-programming development of rules associated with the voice portal of FIGURE 1;

FIGURE 18 is an exemplary graphical user interface window for vendor form options used in the non-programming development of rules associated with the voice portal of FIGURE 1;

5 FIGURE 19 is an exemplary graphical user interface window for the testing of a URL in the non-programming development of rules associated with the voice portal of FIGURE 1;

FIGURE 20 is an exemplary graphical user interface window for the selection of patterns in the non-programming development of rules associated with the voice portal of FIGURE 1;

10 FIGURE 21 is an exemplary graphical user interface window used to identify patterns for the detection of links on multiple pages during the non-programming development of rules associated with the voice portal of FIGURE 1;

FIGURE 22 is a diagrammatical representation of the hierarchical structure used in the programming of a spider;

15 FIGURE 23 is an exemplary graphical user interface window for the programming of a spider used with the voice portal of FIGURE 1;

FIGURE 24 is an expanded form of the exemplary graphical user interface window of FIGURE 23;

20 FIGURE 25 is a flow diagram illustrating an exemplary process of fusing information into a unified database of the voice portal of FIGURE 1;

FIGURE 26 is a flow diagram illustrating a second exemplary process of fusing information into a unified database of the voice portal of FIGURE 1;

FIGURE 27 is a diagrammatical representation of the creation of a canonical existant from two existants for more complete information on a given item;

5 FIGURE 28 is a diagrammatical representation of a first portion of an exemplary process of data isolation and transformation from an Internet source to a user of the voice portal of FIGURE 1;

FIGURE 29 is a diagrammatical representation of a second portion of the exemplary process of FIGURE 28 in which data is isolation and transformed from an Internet source to a user of the voice portal of FIGURE 1; and

10 FIGURE 30 is a flow diagram illustrating an exemplary operational flow of the voice portal of FIGURE 1;

FIGURE 31 is a flow diagram illustrating an exemplary operational subsystem of the flow diagram of FIGURE 30;

15 FIGURE 32 is a flow diagram illustrating a second exemplary operational subsystem of the flow diagram of FIGURE 30;

FIGURE 33 is a flow diagram illustrating a third exemplary operational subsystem of the flow diagram of FIGURE 30;

20 FIGURE 34 is a flow diagram illustrating an exemplary process of funneling user responses in the voice portal of FIGURE 1 to determine a desired item or service;

FIGURE 35 is a flow diagram illustrating an exemplary process of carrying out a transaction using the voice portal of FIGURE 1;

FIGURE 36A is a flow diagram illustrating an exemplary process of advertising using the voice portal of FIGURE 1;

FIGURE 36B is a flow diagram illustrating a second exemplary process of advertising using the voice portal of FIGURE 1;

FIGURE 37 is a flow diagram illustrating an exemplary dialog map of the voice portal of FIGURE 1;

5 FIGURE 38 is a flow diagram illustrating an exemplary subsystem of the exemplary dialog map of FIGURE 37;

FIGURE 39 is a flow diagram illustrating a second exemplary subsystem of the exemplary dialog map of FIGURE 37;

10 FIGURE 40 is a flow diagram illustrating a third exemplary subsystem of the exemplary dialog map of FIGURE 37;

FIGURE 41 is a flow diagram illustrating a fourth exemplary subsystem of the exemplary dialog map of FIGURE 37;

FIGURE 42 is a flow diagram illustrating a fifth exemplary subsystem of the exemplary dialog map of FIGURE 37; and

15 FIGURE 43 is a flow diagram illustrating a sixth exemplary subsystem of the exemplary dialog map of FIGURE 37.

DETAILED DESCRIPTION OF EXEMPLARY EMBODIMENTS

20 A system and method for advertising using voice control are described. In the following description, for purposes of explanation, numerous specific details are set forth in order to provide a thorough understanding of the present invention. It will be evident, however, to one skilled in the art that the present invention may be practiced without these specific details. In other instances, well-known structures and devices are shown in block diagram form in order to facilitate description of the exemplary embodiments of the present invention.

One aspect of an exemplary embodiment of the present invention includes a method of advertising. An exemplary embodiment of the present invention advantageously includes a system and method of advertising which provides a correlation between the length of the telephone call and the number of advertisements delivered. Sponsorships and targeted ads must be delivered at a frequency which gains the most revenue, but not so frequent to dilute the service such that the customer is annoyed. Further, an exemplary embodiment of the present invention advantageously provides a system and method of advertising such that once an advertisement has been played, the user has the option to request more information, via a "speak-through". Speak-throughs must be managed and stored in an efficient manner.

Another aspect of an embodiment of the present invention is related to a system which provides voice access to Internet-based information and services. Another aspect of an embodiment of the present invention is related to a system and method for using voice over telephone to access, process, and carry out transactions over the Internet. Yet another aspect of an embodiment of the present invention is related to a system and method for determining if one web site has the same information as another web site. Still yet another aspect of an embodiment of the present invention relates to a system and method for non-programming development of rules used in the transformation of Internet-based information. Another aspect of an embodiment of the present invention is related to a system and method for funneling user responses in an Internet voice portal system in order to determine a desired item. Another aspect of an embodiment of the present invention is related to a system and method for the transformation and canonicalization of systematically structured data.

In one embodiment, a computer system is used which has a central processing unit (CPU) that executes sequences of instructions contained in a memory. More specifically, execution of the sequences of instructions causes the CPU to perform steps, which are described below. The instructions may be loaded

into a random access memory (RAM) for execution by the CPU from a read-only memory (ROM), a mass storage device, or some other persistent storage. In other embodiments, hardwired circuitry may be used in place of, or in combination with, software instructions to implement the present invention. Thus, the embodiments
5 described herein are not limited to any specific combination of hardware circuitry and software, nor to any particular source for the instructions executed by the computer system.

FIGURE 1 illustrates a connection between a voice portal 10 and a network 20. In an exemplary embodiment, network 20 is the Internet, a worldwide
10 network of computer networks that use the TCP/IP network protocols to facilitate data transmission and exchange. In alternative embodiments, network 20 is any type of network, such as, a virtual private network (VPN). Network 20 preferably provides communication with Hypertext Markup Language (HTML) Web pages 30 and 40. Web pages 30 and 40 include a variety of data on a variety of Web servers.
15 Network 20 also provides communication with non-voice portal 50 which couples computers 52 and 54 and a service 56 including a database 58 to network 20. Service 56 is any type of company, content or service provider with a connection to network 20. Database 58 is a storage medium for data and may be an optical, magnetic, or any other suitable storage medium.

20 Generally, voice portal 10 is implemented as a network of servers. Servers can be configured by software. Preferably, the servers include a significant amount of read/write memory including disc drives and other storage. In general, users access voice portal 10 via telephones, such as, a cell phone 12 or a standard telephone 14 by calling a telephone number (using the plain old telephone service
25 (POTS)) which initiates communication between the telephones and voice portal 10. Alternatively, other types of telephone service can be utilized to communicate voice or voice data to portal 10. The portal 10 can be connected to telephones 12 and 14 via a variety of lines, networks, and stations. Advantageously, voice portal 10 provides for voice communication with the user. Voice portal 10 allows the user

access to information and services from web pages 30 and 40 as well as other sources available via network 20. Such access is provided in a quick and efficient way by voice portal 10 continually retrieving, organizing, and storing information from a variety of web sites and Internet services. Other user interface platforms
 5 may also be provided for using voice portal 10. Such user interface platforms include, for example, WAP (wireless application protocol) and web interfaces.

FIGURE 2 illustrates exemplary functional operations carried out by voice portal 10. These functions may be carried out in any variety of ways, including any number of physical structures. In an exemplary embodiment, voice
 10 portal 10 includes a user interface 110, an advertising subsystem 120, a customer management subsystem 130, an existant subsystem 140, a fusion engine 150, an update engine 160, and a database 170.

User interface 110 coordinates voice communications between voice portal 10 and the user. User interface 110 can be either via speech, via the Internet or "world wide web" (WWW), via a wireless application protocol (WAP) interface,
 15 or any other platform interface. In an exemplary embodiment, user interface is speech oriented. In such a speech oriented embodiment, user interface 110 uses word-based automatic speech recognition (ASR) for accepting user input wherever possible. User interface 110 can use a speech recognition software package, such
 20 as, Speech Works provided by Speech Works International of Boston, MA. For high rates of speech recognition, user interface 110 advantageously utilizes a funneling process which funnels user response to a set of recognizable answers. Funneling is described further with reference to FIGURE 34. User interface 110
 also uses spelling-based ASR for accepting user input when word-based ASR is not
 25 possible. Finally, user interface 110 uses keypad entry for accepting user input only when advantageous to user. The key entry utilizes the keys on telephones 12 and 14 (FIGURE 4).

In an exemplary embodiment, user interface 110 performs one or more of the following tasks: (1) Identify a user with a phone number and other user-

specific information. (2) Start a new session for a given user on a given platform. (3) Add a new interaction for a given user on a given platform. (4) Update a user's preference within the set of vertical domains of interest available in voice portal 10. (5) Enable or disable user preferences for that vertical domain of interest. (6)

5 Update a user's expertise level either generally or within a specific vertical. (7) Update a user's demographic or personal information (as well as credit card information). (8) Update a user's session state with user interface-specific information. (9) Add a new credit card to the database. (10) Update an existing credit card with new information. (11) Identify a credit card with the credit card

10 type and number and check if it is in the database already. (12) Set the list of vertical domains available to the user and its order. (13) End a user's session normally. (14) Notify customer management subsystem 130 that the user's session abnormally terminated into some defined status (e.g., call dropped, session timeout). (15) Determine the most recent session of a user given a certain platform,

15 such that it is possible to resume a session if a session was abnormally terminated (e.g., dropped call, session time-out), and return the session state that was stored. User interface 110 can perform additional functions related to identification, session, user, and payment protocols.

Advertising subsystem 120 coordinates activities related to the

20 advertisements to be presented to the user during a communication session. In an exemplary embodiment, advertising subsystem 120 includes advertisements, such as, sponsored advertisements, advertisements targeted to particular users, and permission-based advertisements which are presented only after an affirmative request from the user. In an exemplary embodiment, advertising subsystem 120

25 provides one or more of functions: (1) Choose an advertisement to play based on the user, session, location, content and item being explored. (2) Record that an advertisement was played and if it was completed or not. (3) Record that a speak-through (i.e., as described below, an advertisement where the user selectively chooses to hear more on an advertised subject) was made. (4) Store customer and

30 session information within a bean so that repeated database calls are not needed. (5)

- Create a record for a company that provides advertisements, and be able to identify one. (6) Create an advertisement and an advertisement's contract to be stored in the database (as an advertisement may have different contracts for usage on the system). (7) Create a new sales employee or employer contact for Advertising sales purposes.
- 5 (8) Update an advertisement and/or the contract of that advertisement. (9) Update an advertisement company to change contact information and address information. (10) Update sales employees and employer contacts. (11) Place/remove an advertisement in/from the active list. (12) Mark the advertisement's contract to be completed or incomplete based on external information. (13) Display a list of active
- 10 advertisements based on the advertisement type. (14) Display a list of advertisements relating to a company based on criteria of either inactive, active, incomplete, complete or simply all the advertisements. (15) Display a list of contracts relating to an advertisement based on the above criteria. (16) Display a list of contracts relating to a sales' employee based on the above criteria. (17) Retrieve
- 15 the completed listing of an employee, company, advertisement or advertisement contract by simply passing in a unique identifier. (18) Search the database for near string matches of employee, company, advertisement and advertisement contract existants. (19) Keep track of the deliveries paid for a company on a specific contract and be able to update the outstanding balance of the company. (20) Search the
- 20 update logs to make sure that no data integrity errors are present. (21) Create and modify a playlist needed to store advertisements for a specific genre.

A variety of different methods may be used to carry out each of these operations. Advertising operations are described further with reference to FIGURE 36. Advertising subsystem 120 can perform additional functions related to

25 identification, session, user, and payment protocols. The advertising techniques disclosed herein can also be used with a conventional personal computer (PC) interface web connection.

Customer management subsystem 130 coordinates the management of information related to the user and the user's use of voice portal 10. In an

exemplary embodiment, customer management subsystem 130 acquires information on the user, such as, preferences and demographics, which are selectively used by user interface 110, advertising subsystem 120, and other functions of voice portal 10. Customer management subsystem 120 can perform additional functions related to identification, session, user, and payment protocols. Although subsystems 110, 120 and 130 are described separately, the operations of each can be integrated in a single unit without departing from the principles of the invention.

User Interface (UI) 110 and customer management subsystem 130 interact to provide for the selection of vertical domains and the access of Internet-based information. Vertical domains categorize various fields or areas from which a user may select within voice portal 10. In order for UI 110 to communicate effectively with a user, certain preferences and user facts must be ascertained and understood either passively or actively. Customer management subsystem 130 stores such information into database 170. Alternatively, a separate customer database could maintain such information.

Customer management subsystem 130 acquires information needed to determine customer preferences and facts from UI 110. UI 110 passes data into customer management subsystem 130, which processes it, and then relays it to at least one database. Further, there are the updates of preferences in existant subsystem 140 for further parsing. Then, existant subsystem 140 passes information such as user preferences and facts back to UI 110.

Advantageously, customer management subsystem 130 is modifiable and extensible without making response times appreciably longer. As such, the process to add new vertical domains to voice portal 110 is rapid and consistent. The type of customer facts and demographics can never be completely defined, as new vertical domains can always be added.

Customer management subsystem 130 records all transactions made by users that are subscribed and unsubscribed via a database. Customer

management subsystem 130 also records items that the user locates in a formed history list and tracks the collections that the user looked at (on the web site and through WAP devices).

Customer management subsystem 130 identifies subscribed customers
5 whenever possible, and as passively as possible. Thus, recognition of customers preferably takes place via some sort of identification key, such as, for example, a telephone number and an ID ("PIN") upon entering a system. This identification preferably leads to certain preferences associated with the customer and experience level of a customer within each set of preferences. Additionally, the system allows
10 for an additional level of identification (e.g. password identification) before authorizing a purchase to be made against stored credit card information.

Customer management subsystem 130 maintains, within each of the vertical domains, a set of preferences to facilitate the user interactions via voice portal 10. For example, in an exemplary embodiment, customer management
15 subsystem 130 gathers information from the customer in order to further help determine what type of advertising to give to the customer, and how to improve the customer's service. Customer management subsystem 130 maintains customer preferences appropriate to each supported domain and updates customer data from data sources dynamically. For example, in the Auctions domain of interest, current
20 bid status updated on user request. Voice portal 10 advantageously presents user data with currency appropriate to the domain. For example, in the Auctions domain of interest, bids are always current to within seconds. In the e-commerce domain of interest, pricing information is current when purchase price is presented.

Advantageously, customer management subsystem 130 provides
25 reporting and analysis to allow determination of which users are accessing which services. Further, customer management subsystem 130 provides reporting on session and transaction history by different demographic segment such as, for example, determining which services are accessed by users from a certain income bracket, gender, or age group. Customer management subsystem 130 also provides

reporting of relatedness based on actual use (e.g., the ability to report what other services are accessed by users who are interested in movies).

In order to continually add value and transition with users from one platform to another (for example from the phone to the web, or from the phone to WAP), customer management subsystem 130 advantageously supports personalization features to improve customers experience with the services. In addition to personalization, other sources of "stickiness" (customers "sticking" with the service in light of competition) includes the support of community features such as networks of friends or of folks with common interests. Thus, customers tend to be more loyal to the particular service provider if personalization features and community features are included with customer management subsystem 130.

To support any adaptation of service (or advertising) to customer behavior, customer management subsystem 130 advantageously tracks use of services. Further in the area of interface evaluation, typical user explorations of interface hierarchies may help identify problem areas or very useful areas, or correlated sets of sub-features in single sessions. Another example of an important attribute the services of voice portal 10 is timing. For example, the use of a "barge-in" (where a user can interrupt with an answer before a list or prompt is finished) can signify a more advanced user and a string of barge-in selections to a single sub-tree repeatedly for a specific user may advantageously be detected by customer management subsystem 130 and lead to an opportunity for a short-cut – either a general one, or possibly a customer-specific one.

An aspect of "stickiness" is adaptation of services to a customer's preferences. While this can include relatively simple features such as customer information retention in support of non-repetitive "sign-up" or "purchasing" data-entry requirements, it can also include preferences for navigation of particular sub-trees of interaction in different front-ends, and preferences for service/vendor ordering or selection. As an example of vendor preference or ordering, a user may

select a "preferred vendor," allowing voice portal 10 to limit a list of vendors for a found product to two : cheapest and preferred.

Vertical preferences should be passively set based on user's actions. That is, after requesting a particular attribute more than once, a passive preference would be set. Alternatively, preferences are dynamic, changing based on user's actions. Preferably, users are able to override all passive preferences, by setting or resetting them either through voice or web interfaces.

Customer management subsystem 130 can pull user preferences, such as stock information, weather preferences and (the like) from personalized web pages such as MyYahoo, and MyExcite. The personalized web pages can be previously created by the user via a conventional Internet connection. Alternatively, the personalized web pages can be built by customer management subsystem 130 in response to user voice commands. These pages can then be translated to be used with voice portal 10. General preferences can advantageously be used as a default preference if specific vertical preferences or current call preferences do not exist.

The following is a listing of exemplary vertical preference requirements and their descriptions. Each preference is used differently throughout each interface. In an exemplary embodiment, the only preference for weather is the weather for the location that the customer requests. By default, the user's location is their ZIP code. The Most Commonly Used Location could be overridden by a current call location, if available.

In the Sports domain of interest, there are several different preferences to be looked at. First, favorite sports are an option. Certain sports scores, schedules, and standings can also be sent to the user. For web sites, exclusivity can be used to not send advertisements and information of certain sports. For example, one user may not want to hear information on hockey games, rather the user wants baseball information. Second, the preference granularity can be increased with certain teams being preferred over others. In each of these

granularities, it is possible that a most-recently used (MRU) list of limited choices is used to determine the preference list. Besides type of sport and team preferences, preferred events may be used.

In the Movies domain of interest, needed preferences include locality
 5 of customer and locality of theaters, types of movies (e.g., thrillers, horror, action, etc...), ratings of movies (AA, G, R, etc...), and movies with a customer's favorite actors/actresses in the movies. Each of these preferences may be listed in an MRU list of limited choices.

In the Traffic domain of interest, the main preference used would be
 10 specific routes that the customer would like to use to reach a destination, with an attribute being the time (the current being the default). Thus, an MRU list of limited routes could make up the preference list of a customer.

In an exemplary embodiment, there is a two-level hierarchy of
 15 preferences for the Stocks domain of interest. First, there is a preference for a market list and second, within each market, there is a preference of which stocks and indices to look at. Again, an MRU list of TBD choices of markets and stocks may be tabulated. Other vertical domains of interest may include restaurants, concerts and live events, taxis, and airline reservations.

Referring still to FIGURE 2, existant subsystem 140 coordinates
 20 access by user interface 110, advertising subsystem 120, customer management subsystem 130, fusion engine 150, and update engine 160 to database 170. Existant subsystem 140 manages the creation, adaptation, and manipulation of the data structures contained in database 170. Data contained in database 170 is gathered from Internet sources by update engine 160. In an exemplary embodiment, the data
 25 structure used in database 190 is based on a hierarchy of "existants" or things and their relationships and associations with each other. Advantageously, the ability to replicate and modify information in database 170 is more easily done because database 170 interacts only with existant subsystem 140. Existants and their

creation are described further with reference to FIGURES 4-10. Specifically, an exemplary data structure model for existants is described with reference to FIGURES 4-6 although various other structures for existants can be utilized. Creation and updating of existants are described with reference to FIGURES 7-10.

5 Fusion engine 150 determines whether two existants are the same and, if so, fuses the existants to form a third canonical existant. As such, fusion engine 150 establishes whether information gathered from one source is related or the same as information gathered from another source. Functions of fusion engine 150 are described further with reference to FIGURES 25, 26, and 27.

10 Update engine 160 retrieves information from the Internet to update information and attributes contained in database 170. In an exemplary embodiment, update engine 160 utilizes "spiders" which retrieve information from the Internet in order to update information in database 170. Operations of update engine 160 are described further with reference to FIGURES 7 and 8.

15 Database 170 stores information used by voice portal 10, such as, customer data, advertising information, and product and services information. Information in database 170 is stored into existants, existant attributes, existant relationships, and existant associations. What existants are, how they are formed, how they are related to each other, and how they relate to the functionalities of
20 voice portal 10 are described further below. In alternative embodiments, multiple databases may be used for specific types of information, such as, customer data, advertising information, and operations records.

FIGURE 3 illustrates an exemplary physical layout of voice portal
10. These physical structures are by way of example only. Other structures may be
25 used in combination with or in lieu of those shown. In an exemplary embodiment, voice portal 10 includes front end servers 210, a front-to-back network 220, back end servers 230, and a back-end network 240. Users communicate via telephone

with one of the front end servers 210, which is coupled to back end servers 230 by front-to-back network 220.

In an exemplary embodiment, back end servers 230 include a proxy manager 245, proxies 250, beans 260, and a database 270. Proxy managers 245
5 receive requests for information from one of front end servers 210 via front-to-back network 220. Proxy managers 245 communicate via back end network 240 to determine work load levels at each of proxy managers 245. Once an appropriate proxy manager 245 is determined, the appropriate proxy manager 245 pulls a free proxy from a pool of free proxies 250 and assigns the proxy to a bean 260. Bean
10 260 is associated with database 270 in order to retrieve information, insert information, search existants or existant relationships, or perform any other function possible with database 270.

The virtual database structure described with reference to FIGURE 3 is designed to deliver information garnered from Internet 20 to users of voice portal
15 10 in a timely and highly utilitarian way. People need and use information in a variety of settings and ways, and, advantageously, voice portal 10 supports this on a variety of platforms including, but not limited to, the phone (e.g., voice, WAP and both), the web, and portable connected computing devices (e.g., Palm® OS device, WinCE® device, RIM pager).

20 Back end servers 230 include a database service support with a variety of features, including data collection and fusion. Data collection includes the amassing of data from Internet sources at regular intervals to be scheduled for particular item types and/or sites, as described with reference to FIGURES 7 and 8. Voice portal 10 detects changes to data source sites and notifies the appropriate site
25 rule manager, as described with reference to FIGURES 9 and 10. Voice portal 10 also supports non-expert definition of data extraction for data sources, as also described with reference to FIGURES 9 and 10.

In the process of "fusion," voice portal 10 identifies identical items from different Internet vendors. During the fusion process, voice portal 10 retains meta data about the source of all information. Meta data includes data about data. For example, meta data may document data about data elements or attributes, (name, size, data type, etc.) and data about records or data structures (length, fields, columns, etc.) and data about data (where it is located, how it is associated, ownership, etc.). Further, voice portal 10 supports interactive clarification of fusion decisions or non-decisions by non-experts in cases where certainty cannot be determined automatically. Voice portal 10 also supports additions of new data types and data elements, without code change. Even further, voice portal 10 supports domain-specific concepts of relatedness that are identified through market research, trial, and opportunity. For example, in the e-commerce domain of interest, cheaper, better, often-bought-with, and most-popular are important relatedness concepts. In the movies domain of interest, related movies and products, and best movies in a category, most popular, best by reviewer, and cast, are important relatedness concepts. Voice portal 10 collects and retains related information necessary to provide additional detail about an item (e.g., product descriptions). The operation and functionalities of fusion are further described with reference to FIGURES 25-27.

FIGURE 4 illustrates an exemplary data structure model 300 used by database 170 of voice portal 10 in which "existants" (or things) are given attributes, associations, and relationships. An "inheritance" relationship between existants is depicted by a solid line with a triangle head. An "association" relationship between existants is depicted by a dashed line with an open head arrow. For example of an inheritance relationship, in the data structure model 300, a block 310 is an "event". An "event" is an "existant" or thing, illustrated by a triangle headed arrow 315 to a block 320. Similarly, a "movie showing" (block 330) is an "event" (block 310), illustrated by a triangle headed arrow 335. For example of an association relationship, events are associated with "venues", as illustrated by an open headed arrow 345 to a block 340. Similarly, a movie showing (block 330) is associated

with a "movie package" (block 350), as shown by an open headed arrow 355.

Events can also be sporting events, dramas, concerts, comedy shows, fireworks presentations, dancing performances, or any other activity.

5 Data structure model 300 includes more existants, associations, and relationships which are illustrated in FIGURE 4, but not described here. Further, data structure model 300 may include more existants, associations, and relationships which are not included in the illustration. FIGURE 4 is for illustration only.

10 Referring now to FIGURE 5, an exemplary data structure model 400 is illustrated to show the object oriented relationships between a user or customer object and the different vertical classes. Depictions of inheritance and association relationships are the same as in the depiction of data structure model 300 described with reference to FIGURE 4. In an exemplary embodiment, user information arranged in data structure model 400 is contained in database 170. However, in alternative embodiments, such user information may be contained in a separate
15 customer database.

The customer is an Existant (Customer Existant Block 402) and is a direct descendent of the top level, or the "Existant" existant, within the hierarchy, and thus inherits all of its properties and methods. The reason behind this structure is that database 170 and its methods are already created and the structure allows
20 reuse of code.

The customer object contains various pieces of information. The generic Preferences class contains information on preferences, such as, "Traffic", "Weather", and "Movies". Each time a customer entered a new and different vertical domain of interest, an instance of the Preferences object to the vertical
25 domain's name is created with preference data inserted. If the vertical domain already exists, then the object is modified with the updated information.

Session class records the information directly about a user's session (session block 404). The session may be a call, a search through the website, or a

call using the WAP. Data, such as, time of day and duration are general attributes but analysis on whether the user made a call from a landline or cell phone is specific to phone sessions. This type of data is useful for determining to whom voice portal 10 directs marketing (for advertising purposes), and improving both performance and service. As well, a customer object has a link to each of these session objects to 5 determine what was the last session on that platform (in case a user terminated the session and would like to reconnect at that specific time).

A Phone Session block 408 records information relating to a communication session where a telephone is used to communicate with portal 10.

- 10 Phone Session block 408 includes information, such as, the current level of interaction, the current domain of interest, the type of interface platform (e.g., WWW, WAP, ASR), and previous levels visited. Advantageously, Phone Session block 408 allows the user to rejoin a session where he or she left off in a previous session or from an interrupted session. Other existant blocks, such as, credit card 15 info existant, location existant, and preferences existant contain associated attributes and record information as needed.

The Expertise class (Expertise block 406) serves the purpose of maintaining different levels of usability (generically, and for different preferences) across different platforms (i.e. Phone, WAP, WWW). The Customer has links to 20 each of these class instances. These are not included in the Preferences class since preferences can cross platforms and user's capabilities cannot.

FIGURE 6 illustrates an exemplary data structure model 450 used by database 170 of voice portal 110 for information related to advertising. Depictions of inheritance and association relationships are the same as in the depiction of data 25 structure model 300 in FIGURE 4. In an exemplary embodiment, advertising information arranged in data structure model 450 is contained in database 170. However, in alternative embodiments, such advertising information may be contained in a separate advertising database.

Advantageously, data structure models 300, 400 and 450 provide for a continually expanding arrangement of information on existants, associations, and relationships. Furthermore, models 300, 400, and 450 allow for the creation of new vertical domains of interest quickly and without changing previously entered

5 information. For example, model 300 includes information related to events, such as, movies and concerts as well as commodities, such as, books, toys, and electronics. Any event, such as, ballets can easily be added as an existant with an inheritance relationship with "event" and appropriate association relationships. Similarly, any commodity, such as, a vehicle can easily be added as an existant with

10 an inheritance relationship to "manufactured item" and appropriate association relationships. The dynamic nature and expansive capabilities of data structure models 300, 400, and 450 allow voice portal 10 the advantage of being a unitary voice portal to a wide range of Internet-based information and services.

FIGURE 7 illustrates a flow diagram 700 of an exemplary creation

15 process of an existant, such as, existants shown in exemplary data structure model 300 (FIGURE 4), data structure model 400 (FIGURE 5), and data structure model 450 (FIGURE 6). In a step 710, a web page on the Internet is found. In an exemplary embodiment, a spider is used to find particular web pages relating to a pre-determined category of items. A spider is a conventionally known program that

20 automatically explores the World Wide Web (WWW) by retrieving a document and recursively retrieving some or all of the documents that are referenced in it. In contrast, a normal web browser operated by human does not automatically follow links other than in line images and URL redirection. After step 710 is performed, a step 720 is performed in which information is identified on the found web pages by

25 using a chosen form which overlays the page to filter out particular information. After step 720, a step 730 is performed in which rules are used to identify characteristic information or attributes from the information retrieved by the form overlay in step 720. Characteristic information or attributes define what the existant is. Rules define the organization of existant attributes. For example, a movie

existant may include the attributes of a title, a director, a cast, a release year, and a synopsis.

After step 730 is performed, a step 740 is performed in which attributes are organized within the existent and the existent is stored in database 170.

- 5 Preferably, the organization and arrangement of attributes within the existent are structured by pre-defined rules.

FIGURE 8 illustrates the exemplary creation process of existants as described with reference to FIGURE 7. A spider 810 traverses Internet 20 for information stored on a wide variety of different web pages. Information retrieved by spider 810 is organized and arranged according to rules 820 in order to place information in a data structure 830. In an exemplary embodiment, spider 810 retrieves information from Internet 20 regarding movies. For example, spider 810 may traverse the IMDB web site and retrieve information regarding the title, director, cast, year of release, and running time for a particular movie. Once movie information is stored in data structure 830, data structure 830 is applied to a lexical table 840. Lexical table 840 organizes attributes contained in data structure 830 and places the information in three columns. In an exemplary embodiment, the first column of lexical table 840 includes the original data, the second column includes the original data in a normalized and tagged format, and the third column includes the data in a searchable and mashed format. Lexical table 840 and data structure 830 are contained within memory structures in database 170.

By way of an example, if spider 810 traverses Internet 20 for information related to the movie "Raiders of the Lost Ark," data retrieved from Internet 20 will be applied against a rule corresponding to movies and placed in data structure 830. Such a rule for movies may include title, director, cast, and release year, all of which are attributes of movies. In this example, the title would be "Raiders of the Lost Ark," the director would be "Steven Spielberg," the cast would be "Harrison Ford and Karen Allen," the year would be "1981," and the running time would be "115 minutes." As such, lexical table 840 would contain

the title in its original format: "Raiders of the Lost Ark," the data in normalized and tagged format: <title> Raiders of the Lost Ark</title>, and in searchable mashed format: RaidersLostArk, without any spaces or identifying articles (e.g., the, a, an).

5 FIGURE 9 illustrates a flow diagram 900 which depicts an exemplary process of gathering Internet-based information using non-programming means. In a step 910, a search page is found and patterns are used to isolate the area on the page containing relevant information. After step 910 is performed, a step 920 is performed in which an appropriate form is found and special routines are invoked to
10 extract actual data and information. After step 920, a step 930 is performed in which multiple pages with related information is found given a particular page. Apart from the data specific patterns, there is an area pattern that defines where data specific patterns operate in the particular page. After step 930 is performed, a step 940 is performed in which links to more listings of products or services on the
15 multiple pages are found. In an exemplary embodiment, a prediction routine is used to compute actual patterns of product listings from code samples.

 In general, the prediction routine computes a pattern from a desired output given by a rule writer. Advantageously, the pattern prediction routine speeds up production because a rule writer simply has to paste from the HTML code the
20 text fragments that he or she wants extracted, without having to develop the patterns to make that happen. The input fields currently used to write the patterns are used to insert this data.

 By way of example, a prediction routine develops a pattern for Author data for web pages giving data on books by first having the rule writer copy
25 a sample author name on the web page into the Author field. The algorithm then matches the sample data to its location on the web page. Characters or tags proximate the matched data are identified as a "prefix" and "suffix". Prefixes are characters before the matched data and suffixes are characters after the matched data. The prefix and suffix are used to construct a pattern.

The constructed pattern is applied to the web page to match against other data. If the constructed pattern picks up data which is not equal to the desired result, then the prefix and suffix used to develop the pattern are added to, for a more complete and accurate pattern. This procedure repeats to improve the pattern.

- 5 To further clarify this example, take the following HTML code from a web page giving product data on books:

```
<html>
<title>Programming Perl</title>
written by <b>Larry Wall</b>
10 </html>
```

```
<html>
<title>Learning Perl (<b>2nd edition</b>)</title>
written by <b>Randal Schwartz</b>
15 </html>
```

- 15 The rule writer dumps "Larry Wall" in the Author field to indicate that this is the data to extract for Author.

The pattern prediction algorithm roughly works as follows:

```
n = 1;
repeat
20 $page = ~m / ({.}n) Larry \s+ Wall ({.}n) /x;
   $prefix = $1;
   $suffix = $2;
   $page = ~m / $prefix (.*) $suffix /x;
   n = n + 1;
25 until ($1 eq <desired_data>);
```

- Starting with n=1 on the first page, the algorithm matches ">Larry Wall<" which means that \$prefix gets value ">" and \$suffix gets value "<". Next, the pattern prediction algorithm builds the pattern ">(.*?)<" using the values for \$1 and \$2 it got from the first step. Matching this pattern against the web page results in
- 30 ">Programming Perl<" which is not equal to the desired result "Larry Wall". Therefore, n is incremented to n=2 and the pattern is refined to include another

character in the prefix and suffix. Matching the web page with “({.}2) Larry \s+ Wall ({.}2)” results in “b> Larry Wall </” which means that \$prefix gets value “b>” and \$suffix gets value “</”. Next, the pattern prediction algorithm builds the pattern “b>(.*)</” using the values for \$1 and \$2 it got from the first step.

- 5 Matching this pattern against the web page results in “Larry Wall”, the desired output.

Now, as the rule writer steps through web pages to apply the same pattern on different pages, he or she discovers that the pattern matches: “2nd edition” on the page about book “Learning Perl”. The rule writer then improves the algorithm by giving a second example of a desired result, (i.e., he or she dumps “Randal Schwartz” into GUI input field), which triggers the pattern prediction algorithm to further increment n until a pattern enforcing a “y” before the is created. The algorithm may perform several iterations, depending on the complexity of the web data data and the pattern needed.

- 15 After step 940 is performed, a step 950 is performed in which a vendor specific data extraction file is generated. In an exemplary embodiment, a routine is used that computes relevant URLs from code samples. Alternatively, the routine that computes URLs can be passed as a form. After step 950 is performed, a step 960 is performed in which a cache is created. After step 960 is performed, a step 970 is performed in which patterns for extraction of product data are created. In a preferred embodiment, a regression test mechanism supports editing the special routines.

- FIGURE 10 illustrates an exemplary process of the non-programming development of rules associated voice portal 10. In the exemplary process, a rule writer from a set of rule writers 1010 accesses the World Wide Web (“WWW”) 1020 in order to access information from any one of data source 1030, data source 1035, data source 1040, or any other data source connected to WWW 1020. Data retrieved from a data source is placed into a data structure utilizing a data organizing tool 1025. Rule writers 1010 use data organizing tool 1025 to apply one

of a multitude of possible forms to "pages" of information available via WWW 1020. Such forms provide indications for the location of relevant information on the page and labeled with some distinctive tag. For example, a page provided on WWW 1020 may include a data input box in the upper left hand corner of the page.

- 5 Further, relevant information on a part or service may be located after a HTML tag, such as, "<title>" for the title of a book.

It should be noted that as used herein the term "page" includes a user interface screen or similar arrangement which can be viewed by a user of the diagnostic system, such as screens providing graphical or textual representations of data, messages, reports and so forth. Moreover, such pages may be defined by a markup language or a programming language such as Java, perl, java script, or any other suitable language.

Using the form selected by rule writers 1010 from data organizing tool 1025, data from data sources is organized into a data structure 1045, data structure 1050, data structure 1055, or any similar structure for maintaining information. Data structures 1045, 1050, and 1055 may be compared, fused, or utilized in the formation of a unified data structure 1060. Unified data structure 1060 is stored in a database 1070.

Advantageously, the exemplary process illustrated in FIGURE 10 allows non-expert rule writers 1010 to select from a variety of forms provided by data organizing tool 1025 to use in the retrieval of information from particular web sites available via WWW 1020. As such, data contained on web pages from data sources 1030, 1035, and 1040 can continually be updated to database 1070 with the form selected by rule writers 1010 using data organizing tool 1025. As information contained in data structures 1045, 1050, and 1055 are compared for accuracy, data organizing tool 1025 detects when web pages have changed the format or arrangement of data on their corresponding web page.

FIGURES 11-24 illustrate an exemplary process of creating a new rule. Further, FIGURES 11-24 illustrate possible interactions between a rule writer and data organizing tool 1025 (FIGURE 10). One exemplary rule is based off an existing rule: the Amazon.com book products. The steps taken in constructing this rule are similar to the steps taken in constructing any other rule.

FIGURE 11 illustrates a graphical user interface (GUI) 1110 which is used to initiate the creation of rules 820 (FIGURE 8). GUI 1110 includes a vendor window 1120, a spider selection window 1130, a query window 1140, a status window 1150, a search box area 1160, and a code window 1197. Search box area 1160 includes a slider bar 1170, right set of arrows 1180, left set of arrows 1190, and a search window 1195.

To start a new data source, a rule writer enters the data source (e.g., Amazon Book) in a vendor window 1120. The rule writer presses 'Enter' and clicks the 'New' button. After this action is performed, a graphical user interface (GUI) 1200 illustrated in FIGURE 12 is shown. The rule writer clicks on the 'Done' button after confirming that the data source is listed correctly. Next, graphical user interface (GUI) 1300 illustrated in FIGURE 13 is shown. A URL is displayed corresponding to the selected vendor name. The rule writer is asked to confirm the correct URL. In the example of Amazon Book, the URL <http://www.AmazonBook.com> appears in a window of GUI 1300. However, the URL link should read <http://www.Amazon.com>. The rule writer corrects the URL and clicks on the "done" button.

Referring again now to FIGURE 11, the rule writer selects the type of query that is desired. First, the rule writer selects query window 1140 and chooses from a list of potential queries. For example, "book package" maybe a possible query for the book vertical domain of interest. This search is started when the rule writer clicks on the "SDE" (search data editor) button in query window 1140. The SDE button invokes a search data editor, which provides a graphical user interface (GUI) 1400 illustrated in FIGURE 14. GUI 1400 shows a list of

attributes useable in a search for the particular item of interest. For example, where books are being searched, attributes such as ISBN or UPC are shown. Where searches are for other items, attributes are listed which correspond to that item. A search for "Movie Showings" results with attributes listed, such as, Movie Package, time, and showing date (see block 330 described with reference to FIGURE 4).

The rule writer types a ISBN number into the corresponding data box and clicks 'Done'. Buttons 1430 in GUI 1400 advantageously allow the rule writer to save different search criteria during different searches. Once the search criteria is entered, the rule writer clicks 'Done' and because no rules have been defined for the particular data source (i.e., Amazon Book), a graphical user interface (GUI) 1500 illustrated in FIGURE 15 appears. GUI 1500 asks whether the rule writer wants to add a new rule or change the search data. In this example, the rule writer clicks on the "add" button and GUI 1500 expands to become graphical user interface (GUI) 1600 illustrated in FIGURE 16.

Referring now to FIGURE 16, the rule writer confirms that the correct type of query is highlighted. In this example, ISBN is highlighted and the rule writer clicks on the "yes" button. A graphical user interface (GUI) 1700 illustrated in FIGURE 17 appears to instruct the rule writer that the home page of Amazon Book is loaded into the netscape browser. The rule writer is instructed to browse the web page associated to the ISBN rule. Once the search page is loaded into the Internet browser, the rule writer clicks the "done" button.

A graphical user interface (GUI) 1800 illustrated in FIGURE 18 shows a form option to be selected by the rule writer. If the form is correct, the rule writer clicks the "done" button. If the form listed does not give the rule writer the choices required, the rule writer clicks on the "next" button to see other forms on the page. Once a page that matches is found, a graphical user interface (GUI) 1900 illustrated in FIGURE 19 is displayed.

Data organizing tool 1025 (FIGURE 10) displays the resulting page in the Internet browser. If the page is correct, the rule writer clicks on "okay" on GUI 1900. A graphical user interface (GUI) 2000 illustrated in FIGURE 20 appears and asks how to detect single items on the page if the search matches on multiple
5 items. GUI 2000 is also used to indicate where to find the URL to get details about the queried item. If only a single item was found, the rule writer clicks the "defer" button because not enough information is present to build the regular expression. If multiple items are found, a regular expression is entered into a data window 2010. For example, an author search may return multiple items because a single author
10 may have written several books. In other cases, even if the query only matches one item, it may be necessary to follow an additional URL link to get the information.

A graphical user interface (GUI) 2100 illustrated in FIGURE 21 appears next and is used to detect multiple product pages. If the rule writer goes directly to the item searched for, there is no need for information to build the
15 regular expression. Referring again to FIGURE 11, code window 1197 is filled with HTML code from the retrieved page. At this point, the rule writer is ready to specify attributes. Attributes are specified by entering a regular expression into the box next to their name. The regular expression must specify one substring in it (using parenthesis) as a result of the expression. For example, the regular
20 expression: "this (all) matches" would return "all" as its result (assuming that the regular expression was able to match). For example, determining the pattern used to find the title of a book requires that the rule writer type in the title of the book into search window 1195. A variety of HTML signals may be used. The "\s*" is required to indicate possible blank space between words. The first match of the
25 search string entered in search window 1195 will highlight the first match found in the HTML code. For example, a title may be found inside a pair of <title> tags with some extra information. An exemplary attribute for title of a book may be "<title> ([^<]*) </title>". Once the attribute is entered, all matches to the attribute are found.

Referring again to FIGURE 14, search data editor 1400 consists of a form which can be used to assign values to type dependent attributes. The status window indicates what data organizing tool 1025 is doing. In an exemplary embodiment, the status states are idle, running the query over the Internet, and

5 using the cache. Query window 1140 allows the rule writer to set the type of query desired for the data source in question as well as set the search criteria by using the SDE button.

Spider selection window 1130 allows the rule writer to set the spider to be used if not doing a query search. In an exemplary embodiment, the possible

10 spider types are full, incremental, special, and reference. A full spider takes all items that match the chosen type. Incremental spiders are usually used to pick up updates of data from Internet data sources. Special spiders are usually used to pick up something that the site has that is special, such as, best sellers for books. Reference spiders are usually used to confirm that the site is still up and rules are

15 working.

Vendor window 1120 allows the rule writer to set the data source to work on. Search window 1195 allows the rule writer to keep text to be searched for in the HTML code. In code window 1197, there is a cursor to indicate position of text entry. Left set of arrows 1190 includes a first number, which is the starting

20 point of where the search will run when running from the cache. The second number indicates the total number of pages in the cache. The set of arrows in this window controls the page to start from when the rule writer runs from the cache. Right set of arrows 1180 includes arrows to scroll through pages retrieved.

Spiders are similar to queries but they are called when no other rules

25 are applicable. Spiders are responsible for gathering information on every object in the web site that matches the specified type. The spider consists of several nested loops, each designed to go one level deeper into the hierarchy. Referring now to FIGURE 22, an exemplary spider hierarchy 2200 is shown for a book spider where

a level 2210 is the start page, a level 2220 represents book category pages, level 2230 represents book sub-category pages, and a level 2240 represents book pages.

Referring now to FIGURE 23, a graphical user interface (GUI) 2300 is used to retrieve the URL of a page to be associated with a spider rule. A spider depth slide rule allows the rule writer to tell data organizing tool 1025 how many links down it takes to get to the actual product page. The upper bound slide rule allows the rule writer to specify a limit on how many items to spider. Once the URL is selected and a spider depth and an upper bound is selected, the rule writer clicks on the "done" button. A graphical user interface (GUI) 2400 illustrated in FIGURE 24 is shown. The rule writer enters search patterns for the spider to use in a similar fashion to the search patterns entered for a query described with reference to FIGURE 11. Once the pattern is entered, the rule writer clicks on the "build" button and the spider will start to run.

Advantageously, the graphical user interfaces shown and described with reference to FIGURES 11-24 allow non-expert rule writers to perform data searches and create forms of rules for information retrieval. Once the forms are created, the forms can be frequently used to gather updated information. Further, forms are helpful to retrieving large amounts of information available at a vendor's web site using a common form corresponding to the arrangement and display of information by the vendor on the web site. Advantageously, forms of rule creation by non-experts provides for lower costs to update information available at web sites. Further, the forms advantageously automate accurate retrieval of Internet-based information.

FIGURE 25 illustrates an exemplary process of fusing information in a database. In exemplary embodiment illustrated by FIGURE 25, a flowchart 2500 depicts a simplistic fusion process, or "quick fusion", executed by fusion engine 150 (FIGURE 2). In a step 2510, update engine 160 receives information from network 20 and places the information in an existant data structure in database 170 via existant subsystem 140. Fusion engine 150 has access to existants from update

engine 160 via existant subsystem 140, which accesses database 170. After step 2510 is performed, a step 2515 is performed in which fusion engine 150 gathers exact fusion attributes from an attribute definition table corresponding to the existant retrieved in step 2510. After step 2515 is performed, a step 2512 is performed in which fusion engine 150 executes a “mash” of each fusion attribute from existence retrieved from database 170 into an easily comparable form. In an exemplary embodiment, a “mash” form removes spaces, prepositions, and other non-essential words. Advantageously, a “mashed” format provides for quick searching capabilities.

10 After step 2520 is performed, a step 2525 is performed in which fusion engine 150 formulates a database query in which the data source is set to “same” and the status is set to “canonical”. This query is intended to find an already existing canonical existant from the same data source file which matches the current information. After step 2525 is performed, a step 2530 is performed in which a decision is made whether a match in database 170 is found. If a match in database 170 is found due to the query of step 2525, a step 2535 is performed in which the existant contained in database 170 is updated.

If no match in database 170 is found from the query of step 2525, a step 2540 is performed in which the query of step 2525 is reformulated and the data source is set to “same” and the status is set to “non-canonical”. This query is intended to find an already existing existant from the same data source file which matches the current information. After step 2540, a step 2545 is performed in which a decision is made whether a match is found in database 170 from the reformulated query of step 2540. If a match is found, a step 2550 is performed in which the existant in database 170 is updated.

If no match is found in database 170, a step 2555 is performed in which the query is reformulated with the data source being set to “any” and the status is set to “canonical”. This query is intended to find an already existing canonical existant from any data source which matches the current information.

After step 2555, a step 2560 is performed in which a determination is made whether a match in database 170 is found. If no match in database 170 is found, a step 2565 is performed in which an existant is added to database 170.

If a match in database 170 is found or after step 2550 is performed, a
5 step 2570 is performed in which a determination is made whether the match is a system existant. If the match is a system existant, a step 2575 is performed in which the system existant is updated. If the match is not a system existant, a step 2580 is performed in which a canonical system existant is formed. After step 2580 is performed, a step 2585 is performed in which the existant is added to database
10 170. After step 2585, a step 2590 is performed in which the fusion tables are updated.

Advantageously, the exemplary process of fusing information in a database illustrated by FIGURE 25 provides for the comparison of information on multiple web sites. As such, a determination can be made if one web site contains
15 the same information as another web site. Furthermore, information contained in database 170 of voice portal 10 can continually add information, relationships, and associations of information from Internet-based sources, which provides for greater usability of information retrieved from data sources.

FIGURE 26 illustrates a flow chart 2600 depicting steps taken in an
20 exemplary process of fusion. In the exemplary process described with reference to FIGURE 26, a fusion process is shown which is more comprehensive than the fusion process depicted in flow chart 2500 described with reference to FIGURE 25. In a step 2610, fusion engine 150 reads an attributes definition table from database 170. After step 2610 is performed, a step 2615 is performed in which fusion engine
25 150 reads a fusion control language file for each existant type requiring advanced fusion. After step 2615 is performed, a step 2620 is performed in which fusion engine 150 compiles fusion files into an intermediate computer code. After step 2620 is performed, a step 2625 is performed in which fusion engine 150 holds previously fused existants into memory. After step 2625, a step 2630 is performed

in which fusion engine collects attributes into equivalent sets. After step 2630, a step 2635 is performed in which a decision is made whether an attribute is textual. If fusion engine 150 determines that the attribute is not textual, a step 2640 is performed in which the values are indexed. If fusion engine 150 determines
5 attribute is textual, a step 2645 is performed in which fusion engine 150 indexes substring occurrences in the attribute.

After step 2645, a step 2650 is performed in which fusion engine 150 determines whether the text is structured. If the text is determined to not be structured, a step 2670 is performed. If the text is determined to be structured,
10 fusion engine 150 identifies location and isolated structural segment of the text in a step 2655. After step 2655, a step 2660 is performed in which fusion engine 150 parses isolated parts and identifies semantic information. After step 2660, a step 2665 is performed in which fusion engine 150 indexes semantic information. After step 2665, step 2670 is performed in which fusion engine 150 executes validity
15 checks to verify the integrity of database 170. After step 2670, a step 2675 is performed in which fusion engine 150 retrieves the existant to be fused.

After step 2675, a step 2680 is performed in which fusion engine 150 activates fusion criteria and matching programs for corresponding existant types. Fusion criteria and matching programs involve the use of existant rules which are
20 established as described with reference to FIGURE 10. After step 2680, a step 2685 is performed in which fusion engine 150 executes the first fusion rule from the fusion criteria and matching programs and returns all matches. After step 2685, a step 2690 is performed in which a decision is made whether an acceptable match has been found. In an exemplary embodiment, an acceptable match is one in which a
25 predetermined percentage (e.g., 70%) of attributes are common. In an alternative embodiment, an acceptable match is one in which all attributes which have values that are the same. If an acceptable match has been found, a step 2697 is performed in which a fusion engine 150 fuses existants together. If an acceptable match is not

found, a step 2691 is performed in which the next fusion rule is executed and all matches are returned.

After step 2691, step 2692 is performed in which a determination is made whether an acceptable match is found. If an acceptable match is found, step 2697 is performed in which fusion engine 150 fuses existants together. Fusion of existants includes the creation of a new existant which is associated with the existants to be fused and contains all information therein. If an acceptable match is not found, a step 2693 is performed in which a determination is made whether the last rule has been tested. If the last rule has not been tested, step 2691 is performed again. If the last rule has been tested, a step 2694 is performed in which fusion engine 150 determines whether there are strong partial matches. In an exemplary embodiment, a strong partial match is one in which a match is within a certain percentage, such as, 70%. If strong partial matches exist, a step 2698 is performed in which a deference is made to human examination. If partial matches are not found, a step 2695 is performed in which fusion engine 150 rejects the fusion creation, and a step 2699 is performed in which a new existant is created.

Advantageously, the exemplary process of fusing information in a database illustrated in FIGURE 26 provides for the automatic comparison of information from the same or different data sources. As such, information contained in database 170 can continually be updated and given added relatedness to information from other data sources. Further, fusion allows for the compilation of a more complete and robust unified database than the millions of databases individually available on the Internet.

FIGURE 27 illustrates an exemplary process of creating a canonical data structure from two data structures. A data file 2700 is identified by a unique identification number and contains a first data file 2710, a second data file 2720, and a canonical data file 2730. In an exemplary embodiment, first data file 2710 contains information relating to particular movie retrieved from the IMDB ("Internet Movie Data Base") website (<http://www.IMDB.com>). Second data file

2720 includes movie information for a particular movie obtained from the Reel.com website. In the example illustrated by FIGURE 27, data file 2710 includes a title "Boys of Arizona," the director "Wiltz," the release year "1997," and a synopsis "great movie." Similarly, data file 2720 includes a title "The Boys of Arizona," the
 5 director "Bob Wiltz," the release year "1998," and a synopsis which is blank.

During the process of creating a canonical data file, a rules file 2740 is introduced which contains rules for a particular type of information. In the example shown in FIGURE 27, rules file 2740 contains information relating to the attributes of movies. By application of rules 2740, a chronicle data file 2730 is
 10 created by taking the most complete title from data file 27 and data file 2720, which is the title from data file 2710: "The Boys of Arizona." Director information is obtained from data file 2720 because it is more complete than data file 2710 because it contains the director's first and last name. A conflict exists as to the release year listed by data file 2710 and that listed by data file 2720. Based on prior
 15 information, the conflict is resolved to indicate that data file 2720 has a more correct release year. Chronicle data file 2730 include the synopsis data file 2710 because the synopsis of data file 2720 is blank.

Advantageously, the process of creating chronicle data files described with reference to FIGURE 27 creates data files with more complete and accurate
 20 information. Furthermore, the process allows comparison of information between multiple websites. Even further, the process of creation of chronicle data files allows the increase in relatedness and association relationships among data files.

FIGURE 28 illustrates a functional diagram 2800 of the operations carried out during isolation of data obtained from the web and transformation of that
 25 data for storage in a database. The exemplary process includes extracting data from network 20 into a data structure 2810 in which data is arranged and organized. For example, data related to a traffic report may be extracted from the Internet to include information on a description, a main road, a crossroad, a time, a date, and a severity rating. Data structure 2810 is created and organized by use of rules 2815

which include text patterns and descriptions which permit the arrangement and organization of data into data structure 2810. Data structure 2810 is stored in a data file on a database. Data in data structure 2810 undergoes a transformation in which a first term substitution form is applied to create a data structure 2820. Rules 2825
5 are applied during the term substitution to create data structure 2820, including lexical entry of the transformation table. In the traffic report example, "Rd." is transformed to be "road", "I." is transformed to be "interstate", and "Rt." is transformed to be "route".

Data contained in data structure 2820 is then put in a parsed form in a
10 data structure 2830 according to rules 2835 which apply attribute phrase grammars for transferred data. In the traffic report example, a "direction", such as, north, west, south, and east is identified and a "highway identifier" is determined, such as "interstate" or "highway". Data in data structure 2830 is then placed in a re-arranged form in data structure 2840 by applying term arrangement rules 2845.

15 Data in data structure 2840 is manipulated by a second term substitution form and placed in data structure 2850 by applying rules 2855 from the lexical transformation table. For example, the term "St." is determined to be either "street" or "saint" based on its locational identifier <street st.> or <city st.> in the lexical transformation table.

20 After the lexical transformations are performed, data is placed in data structure 2860, an unfused, normalized, and tagged format. Data structure 2860 preferably resides in database 2850. Normalized and tagged format refers to a format including a uniform organization such that data can be easily searched and compared and HTML tags. Often, HTML tags provide information on the type of
25 data, its location, and its length. Unfused means that the data has not gone through the fusion process described with reference to FIGURES 25 and 26.

Advantageously, the data isolation process described with reference to FIGURE 28 takes data from the Web and transforms it into a normalized and tagged format in a database. Normalized and tagged data is prepared for

organization, manipulation, and fusion. Advantageously, the data isolation process is uniform and works for data from a wide range of data sources. Thus, generally the process includes obtaining data from Internet sources, creating a first data file with the obtained data in a first format, and generating phrases from the obtained data where the phrases are in a second format associated with a specific interface. A wide range of applications may be used to convert the obtained data into the first and second formats. For example, text patterns, lexical transform tables, attribute phrase grammars, and term arrangement rules may be used to convert obtained data into a uniform and searchable format, which is saved in a data file in a database, and then convert the saved data to an interface specific format. In alternative embodiments, other patterns, tables, rules, and data manipulation applications may be used.

FIGURE 29 is a functional diagram 2900 illustrating the transformation of data from database 170 to a user of voice portal 10 via some user interface platform (e.g., WAP, Web, phone, ASR, TTF). Data contained in data structure 2860 (shown also in FIGURE 29) is put in a parsed form in a data structure 2910 by applying rules 2915 with attribute phrase grammars for normalized and tagged data. Attribute phrase grammars take normalized and tagged data to create sensible phrases which include the attributes identified. Data from data structure 2910 is then placed in data structure 2920 by applying a term substituted form using rules 2920 containing lexical entry transformation tables. In the exemplary embodiment, the lexical entry transformation tables of rules 2920 list the data output structure corresponding to a particular interface. For example, the term "route" is transformed into "Rt." for WAP applications and transformed into "Route" for telephone applications using speech. Similarly, the term "U.S." is transformed into "U.S." for WAP applications and to "you ess" for phone applications using speech.

Data from data structure 2920 is placed in a re-arranged form in a data structure 2930 by applying rules 2935 in which term replacement rules are

applied, depending on the output device used. Term rearrangement rules move terms around to the arrangement which best suits different user interfaces. Data in data structure 2930 is then placed in a data structure 2940 in which sentences are generated by applying rules 2945 which include phase generation grammars. For example, a sentence may be generated which says "we have a < severity > traffic incident between <cross location> and <cross location> on <main road>."

Once data is in the format of data structure 2940, it is prepared for a variety of output interfaces, such as, WAP, Web, phone, and ASR.

Advantageously, the data transformation process described with reference to FIGURE 29 is a uniform process which takes data and prepares it for a wide range of user interfaces. For example, the process allows for data to be extracted from web sources and be semantically identified and prepared for speech transmission via a speech interface. At the same time, the process allows for the same data to be prepared for transmission to WAP devices or web applications.

FIGURES 30-33 illustrate several operational paths that demonstrate exemplary interactions between the user and voice portal 10. User interface 110 preferably makes use of explicit prompting to guide the user into making appropriate utterances as described with reference to FIGURES 32-33.

FIGURE 30 is a flow diagram 3000 depicting an exemplary system overview, including process blocks representing various functionalities of voice portal 10. In an exemplary execution path, at a block 3010, voice portal 10 greets the user by saying, "Welcome to Quack, brought to you by American Express." Preferably, voice portal 10 uses caller-ID as means of identifying the user. In a preferred embodiment, phone numbers are stored as a customer attribute in database 170. Alternatively, phone numbers are stored in a customer database. Voice portal 10 continues by stating, "Hello, Steve Woods. Please say your PIN or enter it on the numeric keypad. If this is not Steve, please say or enter your phone number." The user then responds verbally "5082" to give his or her PIN. Once authentication is made, voice portal 10 goes to a block 3020. At block 3020, voice portal 10

indicates "You are at the Quack runway. Please say the name of the category you are interested in from the following list: movies, weather, traffic, stocks, and sports." The user responds with a category name or a goodbye. If a category name is provided, voice portal 10 goes to a block 3030. If a goodbye is given, voice

5 portal 10 provides a graceful exit to voice portal 10. In an exemplary response, the user says "Weather" and voice portal 10 goes to block 3030. At block 3030, voice portal 10 says, "Welcome to Weather, brought to you by The Weather Channel," and goes to a block 3040. At block 3040, the identify unique existant subsystem is performed.

10 After block 3040, a block 3050 is performed in which a determination is made as to whether the existant was found in the identify unique existant subsystem of block 3040. If the existant was not found, control returns to block 3030. If the existant was found, a block 3060 is performed in which the found existant subsystem (described with reference to FIGURE 33) is performed.

15 Referring now to FIGURE 31, the identify unique existant subsystem executed at block 3040 (FIGURE 30) includes a block 3110 in which database 170 provides an attribute from an attribute dependency graph for the current vertical domain (e.g., weather, traffic, movies). If there are not more attributes in the attribute dependency graph, control passes to a block 3115 where an existant search

20 fail is noted. After block 3115, control passes to block 3030 (FIGURE 30). After block 3110 (FIGURE 31), a block 3120 is executed in which an attribute vocabulary is built from an attribute value set provided by database 170. After block 3120 is performed, a block 3130 is performed in which voice portal 10 uses automatic speech recognition (ASR) techniques following a method N to acquire the user's

25 response to an attribute value prompt. For example, voice portal 10 may request the user's location by ZIP code, one exemplary method N. The user may respond by giving his or her ZIP code, such as, "53045".

At a block 3140, a decision is made as to whether the voice recognition was successful. If not successful, block 3130 is performed with ASR

techniques following a fallback method N+1. For example, in the weather vertical domain, a fallback method N+1 may be to ask for the state and city of the user's location. In preferred embodiments, fallback methods include choosing an attribute from a list, constraining the attribute value set by partitioning space (e.g., get state, then city name), and spelling the attribute value. If voice recognition is successful, a block 3150 is performed in which voice portal 10 searches database 170 with the acquired attribute. After block 3150 is performed, a flow chart 3200 (FIGURE 32) is performed.

Referring now to FIGURE 32, flow chart 3200 is shown illustrating a portion of the identify unique existant subsystem. After block 3150 is performed (FIGURE 31), a block 3210 is performed to determine the number of matching existants from the search of database 170. Different actions are taken depending on the number of matches found in the search of the product database. If no matches are found, a block 3220 is performed in which a determination is made as to whether to seek a Compound Unique Key. A Compound Unique Key may exist if there are one or more unique keys or identifiers which are not contained within database 170, but may be used to find the desired item on the Internet.

If one match is found, a block 3230 is performed in which voice portal 10 verifies if the match is the correct existant. If the number of matches is greater than one but less than the maximum number for a list, a block 3240 is performed in which the user is requested to identify the existant from the list of matches. If more matches are found than the maximum number of possible entries in a list, a block 3250 is performed in which it is determined whether the attribute is "extensible." In other words, a determination is made as to whether more information can be provided about the attribute. If more information cannot be provided, control returns to block 3110 (FIGURE 31) in which another attribute from the attribute dependency graph is obtained. If the attribute is extensible, a block 3260 is performed in which the attribute is attempted to be extended. If the attribute can be extended, control passes to block 3120 (FIGURE 31) in which a

vocabulary set is built and ASR techniques and methods are used to obtain an attribute value. If the attribute cannot be extended, control passes to block 3110 (FIGURE 31) in which another attribute from the attribute dependency graph is obtained. If the extension of the attribute results in a list of items, control passes to

5 block 3240.

Referring now to the query performed at block 3220, if a determination is made that there is not a Compound Unique Key to use for a WWW search, control passes to passes to block 3110 (FIGURE 31). If the determination is made that a Compound Unique Key may exist, control passes to a block 3270 in

10 which a determination is made as to whether the WWW is searched. If the WWW is not to be searched, control passes to block 3030 (FIGURE 30) which is the top level of the current vertical domain. If the WWW is to be searched, control passes to a block 3280. Referring now to block 3230 and block 3240, if the correct existant is found or the correct existant is found from the list, control passes to

15 block 3280. If the correct existant is not found in block 3230 or block 3240, control passes to block 3220 for a determination of whether there is a Compound Unique Key which can be searched on to find an item. At block 3280, a web lookup is performed. At this point, the customer may be presented targeted advertisement of a variety of lengths. Advertising is described in further detail with

20 reference to FIGURE 36. During block 3280, block 3060 is performed in which a found existant subsystem is executed.

Referring now to FIGURE 33, the found existant subsystem includes a block 3310 in which a log is made into the customer database of the found item. In a preferred embodiment, customer database is included in database 170. After

25 block 3310, a block 3320 is performed in which information is prepared for presentation as appropriate to the vertical domain from information in database 170. After block 3320, a block 3330 is performed in which related information and command grammar is built. For example, in the movie vertical domain, if a list of

movies showing at a specific theater is played, grammar would include the movie titles to allow the user to ask for more information about a particular movie.

At a block 3340, information is returned from the user. In a preferred embodiment, possible acceptable commands include commands to hear more detailed information, to hear information from a specific source, to hear related information (e.g., cheaper, better), and to take action appropriate to the vertical domain (e.g., increase the bid, change location). After block 3340, a block 3350 is performed in which the next activity is obtained. If a new vertical domain is desired, control passes to block 3020 (FIGURE 30). If a new selection from the top of the current vertical domain is desired, control passes to block 3030 (FIGURE 30). If a new existant is desired, control passes to block 3040 (FIGURE 30).

Referring again to FIGURE 32, after block 3280 is performed, a block 3290 is performed in which web lookup results are coordinated by updating database 170. During coordination of the web results at block 3290, a smart delay handle may be performed at a block 3295 in which advertisements or other forms of handling a delay are performed. Smart delay handle at block 3295 uses information from the customer database and the advertising database. In a preferred embodiment, the customer database and the advertising database are subsets of database 170. In alternative embodiments, the customer database and the advertising database are physically separate databases.

In operation, the system and method for voice access to Internet-based information described herein advantageously can identify a vertical domain of interest to the consumer (e.g., movies, shopping), and then "funnel" user responses from the range of all possible things in a vertical domain to the one or set of things that the consumer wants. This funneling within a vertical domain involves system-directed questioning the user about attributes of products or services, according to a set of pre-defined "paths" to funnel to a particular item. Paths are defined in terms of orderings of constraints about products to be ascertained and instantiated.

FIGURE 34 illustrates a flow diagram 3400 of the funneling process which allows voice portal 10 to funnel user responses and achieve highly accurate rates of voice recognition for user responses. At step 3410, a user calls voice portal 10. After step 3410, a step 3415 is performed in which the caller is identified, using the different possible methods described above. After step 3415, a step 3420 is performed in which the user selects a vertical domain of interest. A step 3425 is then performed in which the attribute funnel characteristic to the chosen vertical domain of interest is started. After step 3425, a step 3430 is performed in which voice portal 10 determines whether the user has preferences in this vertical domain of interest. If there are preferences and the user does not want to over-ride them, control passes to a step 3460 in which the item or service is indicated as found based on user preferences.

If no preferences are available or the user over-rides his or her preferences, a step 3435 is performed in which an attribute vocabulary set is built. Vocabulary sets advantageously allow voice portal 10 to have a limited number of possible responses from which to use in speech recognition of user response at this point in the vertical domain of interest. With a defined vocabulary set, voice portal 10 advantageously achieves with high rates of recognition conventional speech recognition techniques. For example, it would be easier to recognize the term "Brewers" after the user has selected Major League Baseball (MLB) teams and a vocabulary set of possible requests for MLB teams has been built. Such a vocabulary set may include a variety of different types of user inputs for the same information. For example, in the MLB team example, a vocabulary set may include all the city or state names associated with MLB teams as well as the MLB team mascot. Thus, "Milwaukee" and "Brewers" would both be part of the vocabulary set of MLB teams.

After an appropriate vocabulary set has been built, a step 3440 is performed in which voice portal 10 queries on the attribute. For example, "What Major League Baseball team would you like to hear about?" After step 3440, a step

3445 is performed in which the attribute is identified. If an attribute is not identified, a step 3447 may be performed to carry out fallback procedures for the identification of the attribute. At a step 3450, voice portal 10 determines whether it has reached an "end state," or a point at which the item or service has been found.

- 5 If an "end state" has not been reached, a step 3455 is performed in which the next attribute is accessed and control returns to step 3430. In the baseball example given, an end state has not been reached with only the team name. Other "narrower" attributes, such as, recent game results, player statistics, team standings, or other related information must be requested. Once step 3460 is performed, a step 3465 is performed in which the found item or service is reported to the user.

- In an exemplary embodiment, the user selects item in the following manner. The user first specifies the domain of interest (e.g. e-commerce, traffic information, weather information, movies, etc.). The user then chooses an item (e.g., a book, a toy, a route of interest for traffic information, a city of interest for weather information, etc.) by specifying attributes of the item. The user is then provided with detailed information for an identified item, appropriate to the domain of the item (e.g. products, traffic, weather, movies, etc.). For example, in the E-commerce domain of interest reviews, vendor information including pricing, shipping costs and availability are available. In the movies domain of interest, directory, producer, and cast are provided. In the auctions domain of interest, outstanding bids are made available.

- Advantageously, the user may request information by locale (e.g., the nearest vendor for an identified product, the nearest theater for a movie) with multiple ways to identify a locale (e.g., zip, town name, city area "Boston North, West etc.). In an exemplary embodiment, a strategy for location-identification around ZIP codes is used which involves asking for suburb name, falling back to city or even state and then zooming in again. In an exemplary embodiment, the user is provided upon request with the date and time on which information was last

updated. Preferably, all data presented to the user is of currency appropriate to the domain. The user is informed of the source of the information ("provided by XXXXX") for "pure" source information, or information from only one source. In a preferred embodiment, a "help" or "instructions" option is available at every selection point.

The user may request item comparisons based on item attributes, as appropriate to the domain. The user may request identification of "better", "cheaper" and "related" items, as appropriate to the domain. Advantageously, the user may explicitly record items in a number of user-defined lists, as appropriate to the domain of interest. The user may review items from their lists. The user may request phone or email notification of information changes (appropriate to the domain) for items on their lists.

FIGURE 35 illustrates a flow diagram 3500 of an exemplary process of carrying out a transaction using voice portal 10. At step 3510, a user accesses (telephones or calls) voice portal 10. After step 3510, a step 3515 is performed in which a funneling process is performed to identify an item or service desired by the user. Such funneling process performs the operations illustrated in flow diagram 3400 and described with reference to FIGURE 34.

After step 3515, a step 3520 is performed in which voice portal 10 asks the user to specify a transaction desired and relating to the item or service identified. After step 3520 is performed, a step 3525 is executed in which voice portal 10 identifies the appropriate voice portal rule to execute the specified transaction. After step 3525, a step 3530 is performed in which the rule is executed to carry out the specified transaction. Transactions can include purchasing an item or service, making a bid on an auction, or any other type of transaction possible over the Internet. After step 3530, a step 3535 is performed in which voice portal 10 records the result of the transaction. Preferably, the result is recorded in database 170. After step 3535, a step 3540 is performed in which the transaction is reported to the user.

Different transactions (e.g., bid, watch, buy, track) are appropriate to different domains. For example, in the e-commerce domain of interest, the user may order an identified product from a chosen vendor. Further, the user may add an item to a shopping cart for purchase at a later time. The user may specify, when
5 ordering, a billing credit card and shipping address (from user profile or manually). The user may also request status information for previously ordered products. As another example, in the auction vertical domain of interest, the user may increase existing bids or the user may place bids on new auctions.

Advantageously, the process of carrying out a transaction using voice
10 portal 10 does not require a user to make any manual actions on a computer. The user can buy items, make bids, or do any other Internet transaction without clicking a mouse, pressing a key on a computer keyboard, or any other computer-interface manual action (e.g., mouse click, keyboard entry). Thus, the process described with reference to FIGURE 35 can be a "No Click" Internet transaction process.
15 User can utilize the touch pad of a phone and still perform a "No Click" Internet transaction.

FIGURE 36A illustrates a flow diagram 3600A of an exemplary process of advertising using voice portal 10. Advantageously, advertising subsystem 120 includes a method for determining what advertisements to play to a
20 specific user. Generally, this method includes setting selection constraints based on a context, such as, user demographics, location demographics, and a current vertical domain of interest. After selection constraints are set, the method queries an advertisement database based on the constraints and retrieves a list of possible advertisements. The list of possible advertisements is re-ordered based on a sales
25 criteria for each advertisement. An advertisement is selected from the re-ordered list and presented to the user.

Referring to flow diagram 3600A, in a step 3610A, advertising subsystem 120 in voice portal 10 sets selection constraints for advertisements to be presented to a user. In one embodiment, the selection constraints are based on user-

centric information, such as, user demographics, location demographics, and the current selected vertical domain of interest (if any) as well as advertising-centered information, such as, advertising sales criteria, lack of repetition, and other advertising effectiveness factors. Such constraints or criteria are used in selecting from a variety of different types of advertisements, such as, an introductory sponsorship advertisement, a vertical sponsorship advertisement, and a commercial advertisement. After step 3610A, a step 3615A is performed in which database 170 is queried for a list of possible advertisements based on the constraints selected in step 3610A.

After step 3615A, a step 3620A is performed in which the list of possible advertisements is re-ordered based on sales criteria factors. In one embodiment, sales criteria are used to determine the following: (1) Is the advertisement delivery rate being achieved for this advertisement? (2) Has the target delivery minimum been achieved for this advertisement? Advantageously, the sales criteria are used to make sure that each Advertisement customer will have their requirements for delivery satisfied. In one embodiment, a ratio is calculated to prioritize the advertisements on which should be delivered first.

The following provides an example of using a ratio as the determining factor of how advertisements are ordered. Advertisement X needs 100,000 deliveries in its contract. Voice portal 10 has already delivered 7,000 instances of Advertisement X. The start date of the contract is May 10 and end date is June 7th. The current date is assumed to be May 15th. So, an exemplary ratio is determined as follows:

- Number of days since start of contract = 5.
- Length of contract = 27 days.
- Number of days that the Advertisement needs to be played = 22.
- Percent of ads played = $7,000 / 100,000 \sim 7\%$
- Percent of days already played = $5/27 \sim 18.5\%$

As such, an exemplary final ratio is:

(% of days already played - % of ads played) / Number of days remaining in contract

- Advantageously, this ratio accounts for advertisements that should be played soon
 5 (lower denominator -> higher ratio), and the discrepancies of advertisements that have already been played get pushed back with a lower ratio.

- After step 3620A in which the list of possible advertisements is re-ordered, a step 3625A is performed in which an advertisement is chosen. In one embodiment, the advertisement is chosen based on the highest ratio available in the
 10 list of possible advertisements. After step 3625A, different actions are taken depending on the type of advertisement to be presented. In a step 3630A, if there is no advertisement available and if the advertisement type is an introductory sponsorship advertisement, an exception is raised in a step 3635A. Otherwise, a step 3640A is performed in which a decision is made as to whether an advertisement
 15 is available. If there is an advertisement available, a step 3645A is performed in which the advertisement is played. If no advertisement is available, a step 3640A is performed in which the selection constraints are reset and control returns to step 3620A.

- As such, there are differences in the process steps for each type of
 20 Advertisement, of which there are three: introductory sponsorship Advertisements, vertical sponsorship Advertisements, and commercial Advertisements. The following is an exemplary process for selecting an introductory sponsorship Advertisement:

- 25 1. Set selection constraints based on location for the introductory sponsorship Advertisement type (vertical is not used because, no vertical is applied).
2. Query the database based on constraints with result transformed into a list of possible Advertisements to play.
3. Reorder the list based on the sales criteria.

4. Choose the Advertisements from the list with the highest ratio. There must be an Advertisement in the database and raise an exception otherwise.

The following is an exemplary process for selecting a vertical sponsorship Ad:

- 5 1. Set constraints based on user demographics, location demographics, and vertical type for the vertical sponsorship Advertisement type.
2. Query the database based on constraints with result transformed into a list of possible Advertisements to play.
3. Reorder the list based on the sales criteria.
- 10 4. Choose the Advertisement from the list with the highest ratio if one is available and return to the user interface.
5. If none are available, reset selection constraints based only on vertical type and set the type of vertical sponsorship to be only for Quack promotions.
6. Reorder the list based on the sales criteria.
- 15 7. Choose the Ad from the list with the highest ratio if one is available and return to the user interface.
8. If the user heard all of the Advertisements from the list, then return the Advertisement that was last played to the user. If for some reason the list is empty and no Advertisements are available, raise an exception.

The following is an exemplary process for selecting a commercial advertisement:

1. Set selection constraints based on location demographics, customer demographics and vertical type for the commercial Advertisement type.
- 25 2. Query the database based on those constraints with the result transformed into a list of possible Advertisements to play.
3. Reorder the list based on the sales criteria.
4. Choose the Ad from the list with the highest ratio if one is available and return to the user interface.
- 30 5. If none are available, reset selection constraints based only on vertical type and set the type of commercial to be either for Quack (i.e., voice portal system) commercials or paid commercials (regardless of type entered).
6. Reorder the list based on the sales criteria.
7. Choose the Advertisement from the list with the highest ratio if one is available and return to the user interface.

8. If the user heard all of the Advertisements from the list, then return the Advertisement that was last. If for some reason the list is empty and no Advertisements are available, then raise an exception.

Referring now to FIGURE 36B, a flow chart 3600B illustrates a second exemplary process of advertising using voice portal 10. In a step 3610B, a user accesses (telephone or calls) voice portal 10. After step 3610B, a step 3615B is performed in which a user lookup is performed to identify the user. Caller identification may be done in a variety of methods, some of which are described with reference to FIGURES 2 and 30. After step 3615B, in a step 3620B, a determination is made as to whether the user is known by voice portal 10. If the user is not known, a step 3625B is performed in which a default profile is used for the user. In an exemplary embodiment, the default profile does not include user constraints or limitations for certain advertisements. The default profile can be geared for certain parameters known about the call, such as for example, the area code of the user, time of day of the call, day of the week, etc. If the user is known or after step 3625B is performed, a step 3630B is performed in which advertising subsystem 120 generates a set "S" of advertisements based on the type of interface (e.g., speech, WAP, WWW) including user constraints particular to the current user.

Given the current operating context (e.g., particular user, vertical domain of interest), in a step 3635B, advertising subsystem 120 generates weights for advertisement set S based on the advertising context. After step 3635B, a step 3640B is performed to determine whether the context is enough to accurately know what the user most wants. If the context is not enough, a step 3645B is performed in which an advertisement is picked based on the partial context obtained. If the context is sufficient, a step 3650B is performed in which the best-fit advertisement is played.

Advantageously, advertising subsystem 120 provides an initial general advertisement or sponsorship message to all callers. Advertising subsystem 120 also provides targeted audio advertisements to users, chosen based on a utility

function appropriate to the domain. In an exemplary embodiment, the utility function is related to the availability of the product or service to be advertised, the relatedness of the current item (e.g., DVD is related to television), the relevance to the user (e.g., by demographic), the desirability of the user to the advertiser, and the value to the service provider (e.g., based on cost/return). Advantageously, advertising subsystem 120 is capable of delivering a certain number of advertisements to users within a certain time frame. Moreover, advertising subsystem 120 is capable of delivering advertisements across different platforms, such as wireless application protocol (WAP), WWW, and speech interfaces.

10 Taking for example, the speech interface platform, within the first minute, one sponsorship advertisement and one targeted advertisement are delivered to the user. Within each additional 40 seconds, a second targeted advertisement is delivered. In one embodiment, a sponsorship message will process in 3-5 seconds, and then a targeted advertisement takes 10-20 seconds.

15 The implementation of this structure is based on the fact that the introductory sponsorship advertisement is presented upon entering the system. Each time the user enters a vertical, the user is prompted with a "vertical sponsorship". Once the user is about to receive the data requested, a full commercial would be presented to the user. Advantageously, this model approximates the schedule listed in previously as the user is estimated to be searching for their piece of information for 40 seconds before receiving it.

25 In the advertising context, "Speak-throughs" are requests to deliver more detailed information upon presentation of an advertisement. Advantageously, speak-throughs apply not only to speech interface, but also to both the WAP and WWW. For the WAP, speech and text can be considered for a speak-through while clicking on a banner to find out more on an ad would be a speak-through on the WWW. One embodiment of a speak-through on a voice interaction is to point the customer to a website address or a phone number. In alternative embodiments, speak-throughs collect an email address or a custom phone number to provide to the

advertiser to send more relevant information to the customer. With a WWW interface, speak throughs may include using an outside source to manage and audit customer information. Advertising subsystem 120 may also provide targeted “banner” advertisements to users, chosen based on a utility function appropriate to the domain (e.g., WWW interface).

The management of the advertising delivery of advertising subsystem 120 is based on a combination of several factors. In an exemplary embodiment, an advertisement is delivered in one of three places. First, an advertisement may be delivered when the user is preparing to enter the system to begin a new session.

10 This sponsorship message will be in the voice of user interface 110, or “the system voice”, and should rotate among several alternative advertising sponsors. For example, a sponsor message may say, “Quack is brought to you by Visa, the currency of the web” or “Quack is brought to you by SprintPCS; the clear future of cellular services.”

15 Second, another sponsorship advertisement (a “vertical sponsorship” advertisement) may be delivered just before a user has accessed a certain vertical of the system, such as movies, traffic, or weather. For example, such an advertisement may say, “Brought to you by IMDB, the world’s authorities on movie information” and “LCE Sony Metreon: Boston’s ONLY choice for great movie

20 selections.”

Third, an advertisement may be delivered just before the user receives the refined request. This type of advertisement is defined as a “commercial”. Such advertisements are timely (i.e., delivered at chosen points) but only on a so-often basis, such as every 2 minutes. Advantageously, the system

25 voice can point out a value-added situation for the user that may be helpful. For example, a nearby restaurant may be suggested when a user is selecting a movie at a particular theater. Speak-through advertisements are preferably used here, although non-speak through advertisements are possible. The advertising content itself is preferably about 7 seconds in length. The speak-through ads are preferably of

maximum possible quality (i.e., professionally produced), and of length of about preferably 15 to 20 seconds. For example, if the user selects American Beauty as a movie at LCE Sony Metreon, the system voice says, "I'm looking up the listing at Sony Metreon ... if you would like to hear about 'Tony's Matriciana': Boston's best Italian food only 5 minutes from Sony Metreon, say 'Tony's!', or hold on for your listing." The user may then automatically set up a reservation. Other relatedness attributes may also be used for targeted advertising. Advantageously, the advertisement is delivered in these different spots due to the current assumptions that making a vertical-specified request will take the amount of time to deliver the advertisements.

Along with these issues, decisions are made on which advertisements users are to have delivered to them. Factors incorporated into this decision include the length of the call, what type of vertical content is requested, combination of content and user profile (and/or location) (i.e. restaurant ads should be local to the customer), revenue potential, callers requesting specific information, and if the user has heard the advertisement already. In an exemplary embodiment, advertisements are rotated based on the following factors: When was the last time that the ad was played? When was the last time the user heard the ad before this call? Did the user hear the ad already this call? Is the ad delivery rate being achieved for this ad? Has the target delivery minimum been achieved for this ad?

Advantageously, advertisements are delivered in a manner such that the presentation is appropriate to particular customers and are tracked accordingly to billing rates. Thus, certain basic data is gathered to manage each ad, such as, how many times has the ad been played and how many times has an individual user heard the ad?

As well, given this basic data, the following more complex queries are available. For example, queries may include the ability to create a report of all users who have heard an ad among various defined groupings as follows: name, demographic information, location, and relatedness information (what else have

these users requested). Queries may also include the ability to create a report of all users who have requested speak-through information.

The capability of barging-in (i.e., stopping the advertisement from being played), which is possible during other modes of operation for voice portal 10
5 can be removed while presenting an ad. The capability to prevent barge-ins is important in that advertisers must be assured of the data that has been acquired with respect to the advertising that was given through voice portal 10. In one embodiment, the gathering of this advertising data is done by a third party auditor.

Advertising subsystem 120 keeps a record of all advertisements
10 served to users, including successful (i.e., complete) and unsuccessful (i.e., incomplete) deliveries. Preferably, this record is stored in database 170. Advantageously, advertisements may be targeted by vertical domain of interest, or caller location or user, or user preferences, or user past interests, or by some other combination of advertiser interests and user collected information.

15 Advantageously, the use of context sensitive information can be used to narrowly target advertisement to a user. Context-sensitive Advertisement targeting in voice portal 10 relates an Advertisement commercial to nearly exactly what information the user receives. To make this function correctly, an appropriate pointer is passed into the selection algorithm just before the Advertisement is to be
20 played. In the one embodiment, the vertical type is the context pointer.

In other embodiments, an existant is the context pointer that allows more specific targeting. This context pointer matches its attributes' criteria with market research criteria to determine weights in certain categories. These category weights combined with the sales criteria of the Advertisements in the initial list
25 define an ordering of context weights from which to best select Advertisements. This initial list, created from demographics and vertical type, form the basis for the context weighting. Mathematical notation is introduced to generalize this problem into an algorithm, and an example follows to illustrate it.

First, variables are defined with respect to the parameters involved.

Let the list of attributes of the existant passed into the algorithm be defined by the set $\{e_1, e_2, \dots, e_m\}$, where m is the number of attributes in the existant. For example, for a movie existant, sample attributes are genre, location and show time.

- 5 The list of categories available to associate Advertisements with, are defined by the set $\{C_1, C_2, \dots, C_n\}$, where n is the total number of categories. Some sample categories in the system would be: family, restaurants, nightlife, movies, and entertainment. Let there be a context category weight, W_i , for each category C_i , where $i \in \{1, \dots, n\}$. The purpose of having context category weights is to
- 10 determine the strength of the context in comparison to the advertisement's category weights, as discussed below.

- The market research criteria for all existants is represented by $P = \{p_1, p_2, \dots, p_t\}$ where t is the total of all criteria in the database. Each criterion p_j has an associated weight w_j , where $j \in \{1, \dots, t\}$ and each attribute e_i will try to
- 15 satisfy all p_j , for all i, j , where $i \in \{1, \dots, m\}, j \in \{1, \dots, t\}$. Thus, if e_i satisfies p_j , and p_j belongs to category C_k , then $W_k = W_k + w_j$, where $i \in \{1, \dots, m\}, j \in \{1, \dots, t\}, k \in \{1, \dots, n\}$. This iteration is used to define the aforementioned context weights of each category.

- Once the total context weight for each category, W_k , is defined, its
- 20 associated strength ratio, R_k , must be calculated. The strength ratio of a category is used to determine if the context of the existant is strong enough to merit in the selection of the Advertisement. For example, if the family category has many criteria in P , then we want to make sure that the weights corresponding to the context of the existant are in an acceptable proportion. So, $R_k = W_k/T_k$, where T_k is
- 25 the total weight of all criteria in P relating to category k .

The list of advertisements generated by the demographic query are defined by the set $A = \{A_1, A_2, \dots, A_r\}$, where r is the total number of ads in the list. Each ad A_i has its own category weight x_k , where $i \in \{1, \dots, r\}$ and $k \in \{1, \dots, n\}$

which is used in conjunction with the algorithm's corresponding context category weight ratio R_k .

Thus, once the initial list of Advertisements A has been created by filtering the demographics and Advertisement type on the database, the steps in the
5 algorithm would be as follows:

1. Set category weights, W_k , for each category C_k as follows

- Initialize each $W_k = 0$, where $k \in \{1, \dots, n\}$.
- For each $i \in \{1, \dots, m\}$ and for each $j \in \{1, \dots, t\}$, based on the current attributes of the existant, $\{e_1, e_2, \dots, e_m\}$, if e_i satisfies p_j , and p_j is associated with category C_k , then $W_k = W_k + w_j$, where $k \in \{1, \dots, n\}$

2. Now tabulate the categories' total weights independent of the attributes of the existant. From those total weights, establish each category's context ratio

- For each $k \in \{1, \dots, n\}$ and for each $j \in \{1, \dots, t\}$, if p_j is associated with category C_k , then $T_k = T_k + w_j$. Set the context category context ratio, $R_k = W_k/T_k$

3. For each category k , multiply each R_k by the category weight x_k of each Ad A_i , and then multiply the sum by the sales criteria ratio of the Ad, S_i , to get context total G_i

- For each $i \in \{1, \dots, r\}$, calculate G_i where

$$G_i = S_i \cdot (R_1 x_1 + \dots + R_n x_n)$$

4. Select the Ad A_i , where i is defined by $\max(G_i)$, $i \in \{1, \dots, r\}$.

The above algorithm can be illustrated by a simple example. Consider an example
25 where a user is using the service of voice portal 10 while in the movies vertical domain of interest. The vertical sponsorship Advertisement has been played and the user is just about to receive information regarding a movie showing. Thus as context, the selection includes the pointer to the specific existant that is to be played, which is for arguments' sake, "Mission to Mars". Some of the attributes of the
30 movie showing existant are rating (e.g., R), genre (e.g., Thriller) and a show time (e.g., 4:00 pm), which can be represented by $\{e_1, e_2, e_3\}$. Thus, there needs to be a

list of matching context criteria containing the elements $P = \{p_1, p_2, \dots, p_i\}$. A sample list of criteria could be represented in the database as:

Attributes	Match Type	Value	Category	Weight
Movie	--	--	Entertainment	10
Movie Rating	=	G	Family	80
Movie Rating	=	R	Nightlife	50
Movie Genre	=	Suspense	Teen	40
Movie Genre	=	Suspense	Adult	50
Movie Genre	=	Thriller	Teen	80
Movie Show Time	>	7:00PM	Teen	80
Movie Show Time	<	4:00PM	Family	70

- From this table, the categories can be inferred as $C = \{\text{Entertainment, Family, Nightlife, Teen, Adult}\}$ where $k = 5$. So from step 1, $W_1 = 10$, $W_2 = 0$, $W_3 = 50$, $W_4 = 80$ and $W_5 = 0$. From step 2, establish $R_1 = 1$, $R_2 = 0$, $R_3 = 1$, $R_4 = 0.4$ and $R_5 = 0$ (this is assuming that P has only 8 elements, which will not likely be the case, and will be around 200 or more elements). Now, assume that the Advertisement list A has three Advertisements. Assume that the weightings of the advertisements' five categories are:

Ad Name	Entertainment	Family	Nightlife	Teen	Adult	Sales Ratio
IMDB	0.9	0.5	0.7	0.9	0.9	0.8
Mission to Mars	0.9	0	0.9	0.9	0.8	1.1
AMC Theaters	0.9	0.9	0.7	0.9	0.7	1.0

So, from these weightings, $\{x_1, x_2, x_3, x_4, x_5\}$, we can make the calculations to get values for G_i for each Ad A_i , where $i \in \{1, 2, 3\}$, as follows:

$$G_i = S_i \cdot (R_1 x_1 + \dots + R_n x_n)$$

$$G_1 = 0.8 \cdot ((1)(0.9) + 0 + (1)(0.7) + (0.4)(0.9) + 0) = 1.568$$

$$G_2 = 1.1 \cdot ((1)(0.9) + 0 + (1)(0.9) + (0.4)(0.9) + 0) = 2.376$$

$$G_3 = 1.0 \cdot ((1)(0.9) + 0 + (1)(0.7) + (0.4)(0.9) + 0) = 1.96$$

- 5 Thus, based on context and sales ratio determination, the "Mission to Mars" Advertisement is most appropriate. This algorithm notes the context of different categories based on their relevance to the piece of information being retrieved. It also organizes the fact that the Advertisements that need to be played for sales criteria are noted and factored into the ordering. The example illustrates only a short list of
- 10 ads, categories and criteria in *P*. The algorithm is intended to take advantage of many more categories and criteria.

- FIGURES 37-43 illustrate an exemplary dialog map of the interaction between the user and voice portal 10. The dialog map described with reference to FIGURES 37-43 is for illustration purposes only. While only movies, weather,
- 15 traffic, stocks, and sports vertical domains of interest are shown in the FIGURES, it should be apparent that any vertical domain of interest could be included in such a dialog map (and in the interaction of voice portal 10 with the user), particularly in light of the expansive and adaptive capabilities available due to data structure models 300, 400, and 450, described with reference to FIGURES 4-6.
- 20 Furthermore, the specific blocks representing different interactions between the user and voice portal 10 are for illustration only. A wide variety of interactions are possible for each of the many possible vertical domains of interest.

- FIGURE 37 illustrates a dialog map 3700 in which after a telephone call is made by a user to voice portal 10, a block 3710 is performed in which a
- 25 welcome is provided. After block 3710, a block 3720 is performed in which a sign-in procedure is followed (described further with reference to FIGURE 38). After the sign-in procedure of block 3720, the user can select to have an introduction to the service of voice portal 10 at blocks 3730 and 3740 or go directly to the runway information for introduction of the possible vertical domains of interest at a block

3750. Specifically, at block 3730, introductory information is provided on the service provider. At block 3740, introductory information is provided on how the service works. At block 3750, voice portal 10 requests the user to select a domain of interest from a "runway" (e.g., movies, weather, traffic, stocks, sports).

5 If the user selects the movies domain of interest, a block 3760 is performed in which a movies subsystem is executed (described further with reference to FIGURE 39) and the user has access to movie information and transactions, such as, movie listings, theaters, and reviews. If the user selects the weather domain of interest, a block 3770 is performed in which a weather
10 subsystem is executed (described further with reference to FIGURE 40) and the user has access to weather information, such as, today's forecast or the extended forecast for a preferred location or any location. If the user selects the traffic domain of interest, a block 3780 is performed in which a traffic subsystem is executed
15 (described further with reference to FIGURE 41) and the user has access to traffic information, such as, reports by city, reports for a certain route, or personalized reports. If the user selects the stocks domain of interest, a block 3790 is performed in which a stocks subsystem is executed (described further with reference to
20 FIGURE 42) and the user has access to stocks information and transactions, such as, market summaries, stock quotes, stock news, and personalized stock news or transactions (e.g., buy, sell). If the user selects the sports domain of interest, a block 2500 is performed in which a sports subsystem is executed (described further with reference to FIGURE 43) and the user has access to sports information and transactions, such as, sports scores, sports news, sports events ticket information, and sports fantasy league transactions.

25 Referring now to FIGURE 38, a sign-in subsystem is shown. At a block 3810, caller identification is attempted. One type of user of voice portal 10 is an unidentified user. The unidentified user calls in (possibly for the first time) and is either locatable by conventional caller-identification techniques ("caller ID") or not. If the caller-ID does not exist in database 170, the caller is possibly a new

caller. If the caller-ID is suppressed, voice portal 10 can't tell either way. In one embodiment, voice portal 10 asks for a phone number (or other identifier) and continues with an "identified" caller. In an alternative embodiment, voice portal 10 continues without verification. This decision may depend on the kinds of
5 information being requested. For example, in particular vertical domains, the identity of the user may need to be determined to identify the user before proceeding (e.g., auctions).

Identified users are either subscribed or non-subscribed. If the identified user is subscribed, voice portal 10 has information on the user, such as,
10 credit cards and preferences from database 170. Preferably, a user subscribes so that voice portal 10 can start tracking preferences and interests to achieve a higher degree of consumer-value-added and thus loyalty to the service. The user may specify profile information, including addresses and credit card numbers, upon subscription. Further, the more information amassed about a particular caller, the
15 more directed (and hence valuable) advertisements are.

If caller identification is possible, a block 3820 is performed in which user confirmation is performed by asking the user for a password. Once the password is verified, user preferences can be set and control passes to a block 3870 and control returns to FIGURE 37 where an introduction or runway selection is
20 performed. If the password given is invalid, control passes to a block 3840.

If caller identification is not possible or the user did not know his or her password, control passes to a block 3830 where voice portal 10 determines the user's account status. If the user does not have an account, control passes to a block 3850 where an account setup reminder is given that the user should set up an
25 account. If the user has an account, control passes to block 3840 where voice portal 10 gets the user's account number. If the user has forgotten the account number, control passes to block 3850 where the user is asked to set up an account. If the user provides a valid account number, control passes to block 3820 for user confirmation. If the user gives an account number which is invalid, control passes

to block 3860 where voice portal 10 informs the user that the account is invalid and to visit a web site or call a support number for assistance. Control then passes to block 3880 and to FIGURE 37 where an introduction or runway selection is performed.

- 5 Referring now to FIGURE 39, a movies subsystem is performed. At a block 3910, voice portal 10 plays an introduction to the movies domain of interest. The user can select options, such as, movies at a theater, listings for a movie, and movie reviews. If the user selects movies at a theater, control passes to a block 3915 in which voice portal 10 determines the geographic location desired by the user. Various methods may be employed to determine location, such as, ZIP code, state and city, or preferences. If there is no theater near the given location, a block 3920 is performed in which a message is played to inform the user that no theater is located in the given area. After location is determined, a block 3925 is performed in which theater names within the location are listed. After block 3925, a block 15 3930 is performed in which movies are listed which are playing at theaters within the area. Voice portal 10 requests the user select a movie and control passes to a block 3935.

- Returning now to block 3910, which played an introduction to the movies domain of interest, if the user requests listings for a movie, a block 3940 is 20 performed in which voice portal 10 requests the movie title from the user. After block 3940, a block 3945 is performed in which the geographic location desired by the user. As discussed above, a variety of methods may be used to determine the caller's location. If there are theaters showing the selected movie, a block 3950 is performed in which the theaters playing the movie are listed and the user is asked to 25 select from the list. Control then passes to block 3935. If there are no theaters showing the selected movie, a block 3955 is performed and the times for the movie at the closest locations are provided to the user. Control then passes to block 3935.

Referring now to block 3910, which played an introduction to the movies domain of interest, if the user requests a movie review, a block 3960 is

performed in which voice portal 10 requests the movie title from the user. After block 3960, a block 3965 is performed in which the review is played for the selected movie. After block 3965, a block 3970 is performed in which voice portal 10 asks the user if he or she would like to find showings for the movie selected. If the user declines, control returns to block 3960 to get another movie title for a movie review. If the user accepts, control passes to block 3945.

At block 3935, voice portal 10 provides movie showing times for the selected movie and theater. At a block 3980, voice portal 10 requests a next action. The user can request the theater address, which is then provided at a block 3985. The user can also request a review of the movie, which is then provided at a block 3990. Once the user wants to leave the movie domain of interest, control returns to block 3750 of FIGURE 37.

Referring now to FIGURE 40, a weather subsystem is performed, as shown. At a block 4010, voice portal 10 plays an introduction to the weather domain of interest. After the introduction is played at block 4010, control passes to a block 4020 in which voice portal 10 obtains location information to use in the weather domain of interest. As described above, multiple methods are possible to obtain location information, such as, obtaining location from ZIP code, city or state, and other locational indicia. After block 4020, control passes to a block 4030 in which voice portal 10 provides a prompt as to whether the user would like live weather information or weather information for later periods of time. If the user selects to hear weather information for later periods of time, control passes to a block 4040 in which voice portal 10 plays a prompt which provides weather latency options to the user. If the user wants current weather information or after the user has selected latency options at a block 4040, control passes to a block 4050 in which voice portal 10 provides the weather information desired.

After block 4050 is performed, control passes to a block 4060 in which voice portal 10 asks the user whether an extended forecast is desired. If a extended forecast is desired, control passes to a block 4070 in which voice portal 10

provides an extended forecast. After block 4070 or if the user does not want an extended forecast, control passes to block 4080 in which voice portal 10 asks for the next action from the user. If the user wants to continue in the weather domain of interest, control passes to block 4020. If the user wants to leave the weather domain of interest, control passes to a block 4090 corresponding to the runway described with reference to FIGURE 37 as block 3750.

Referring now to FIGURE 41, a traffic subsystem is performed. At a block 4110, voice portal 10 plays an introduction to the traffic domain of interest. After block 4110, control passes to a block 4115 in which voice portal 10 obtains location information for user or personalized information on the user. After block 4115, control passes to a block 4120 in which voice portal 10 obtains city traffic information. If no city traffic information is possible, control passes to a block 4135 in which ZIP code traffic information is obtained. ZIP code traffic information is a fallback if a city is not recognized by voice portal 10. If the city data is not found and data is contained for locations nearby, control passes to a block 4140 in which voice portal 10 asks for a nearby city. If at block 4120 no traffic events are reportable, control passes to a block 4125 in which the user is told no traffic is reportable in the city. If at block 4120 no traffic data is available, control passes to a block 4130 in which the user is provided the option to try another city or to go to the runway for selection of a new domain of interest.

After block 4120, control passes to a block 4145 in which voice portal 10 requests a specific traffic route or the "whole city." After block 4145, control passes to a block 4150 in which voice portal 10 obtains route direction information. After block 4150, control passes to a block 4155 if there is no traffic on the route to report. At block 4155, the user is given the option to select a new traffic route or the "whole city" as well as going to the runway and selecting a new domain of interest. If route traffic information is available, after block 4150, control passes to a block 4160 in which voice portal 10 lists the route traffic for the

selected route. If the user has selected "whole city" in block 4145, control passes a block 4165 in which voice portal 10 lists city traffic information.

After block 4160 and block 4165, control passes to a block 4170 in which voice portal 10 provides the desired traffic report to the user. After block 5 4170, control passes to a block 4175 in which voice portal 10 asks for the next action to be performed in the traffic domain of interest. In an exemplary embodiment, next actions may include repeat the traffic report, continue the list of traffic information, and going to the runway. After the user has made the selection at block 4175, control passes to an appropriate block. For example, if the user 10 selects to repeat the traffic report, control passes to a block 4170. If the user selects the continue list option, control passes to either block 4160 or block 4165, depending on the selection of a specific traffic route or the "whole city" made at block 4145. If the user selects go to runway, the control passes to a block 4180 which corresponds to the runway described with reference to FIGURE 37 as block 15 3750.

Referring now to FIGURE 42, a stocks subsystem is performed. At a block 4210, voice portal 10 plays an introduction to the stocks domain of interest. After block 4210, control passes to a block 4215 in which voice portal 10 provides the user with the option of selecting for a market summary, stock quotes, or a 20 personalized listing called "MyQuack." If the user selects market summary, control passes to a block 4240 in which a market summary is provided for a variety of markets, such as, the Dow Jones Industrial Average, NASDAQ, S&P 500, NYSE Volume, NASDAQ Volume, and 30 year bonds. If the user selects stock quotes, control passes to a block 4220 in which voice portal 10 obtains a specific stock 25 name from the user. After block 4220, control passes to a block 4225 in which voice portal 10 obtains the stock exchange corresponding to the stock name provided in block 4220. After the exchange is identified, control passes to a block 4230 in which voice portal 10 provides stock information, such as, value, last trade, change, volume, and day high/low.

After block 4230, control passes to a block 4235 in which voice portal 10 asks for the next action to be performed in the stocks domain of interest. In an exemplary embodiment, the user may select to repeat stock information/continue listing stock information, get a new stock, hear market summary, or go to runway. Depending on the selection made by the user at block 4235, control passes to block 4240 for market summary, block 4220 for a new stock name, a block 4250 for a personalized my quack stock, or a block 4275 for the runway. Before block 4275, control may pass to a block 4270 in which voice portal 10 provides a preference reminder to the user that preferences may be set to obtain personalized information in a quicker fashion. If the user has already been reminded in this call about preferences, control passes directly to block 4275.

If in block 4215 the user selects "MyQuack" control passes to a block 4245 if no account information is identified and block 4250 if account information is identified. In block 4245 a preference setup and account information is established.

A suggestion may be made to the user that an account be setup on the Web. At block 4250, personalized stock information is provided, such as, value, last trade, change, and volume. During operation of block 4250, the user may identify a specific stock by saying, for example, "that one" during the playing of information on the particular stock. If such a selection is made, control passes to a block 4255 in which stock news options are listed for the particular stock. After the user has selected a particular type of stock news from the list in block 4255, control passes to a block 4260 in which voice portal 10 plays the selected stock news. After block 4260, control passes to block 4265 in which voice portal 10 asks the user whether to return to get list of stock news (block 4255) or exist stock news. If the user selects to exist the stock news, control passes to block 4235 in which the next action for stocks is requested. Once the user has completed the stocks domain of interest, control passes to block 4275 corresponding to the runway described with reference to FIGURE 37 as block 3750.

Referring now to FIGURE 43, a sports subsystem is performed. At a block 4310, voice portal 10 plays an introduction to the sports domain of interest. After block 4310, control passes to a block 4315 in which voice portal 10 obtains the type of sports desired by the user or the user may say "MyQuack" to get scores for a personalized sports type. If the user chooses a particular sport, control passes to a block 4320 in which voice portal 10 obtains the league name of a selected sport from a list. For example, voice portal 10 may list "NFL, NBA, NHL, and Major League Baseball." After the user has made a selection of the league name, control passes to a block 4325 in which voice portal 10 obtains the specific team the user is interested in. After block 4325, control passes to a block 4330 in which sports scores are provided. For example, voice portal 10 may say, "The last game played by TEAM was DATE with a final score of TEAM 1, SCORE 1, TEAM 2, SCORE 2."

If in block 4315 the user has selected "MyQuack," control passes to block 4340. At block 4340, voice portal 10 provides sports scores for the personalized MyQuack sports teams. After block 4340, control passes to a block 4335 in which voice portal 10 provides sports news for teams specific news. After block 4330 and block 4335 control passes to a block 4345 in which voice portal 10 asks whether the user would like the sports information just heard to be repeated. If the user responds affirmatively, voice portal 10 returns to repeat the information provided. If the user does not want the information repeated, control passes to a block 4350 in which voice portal 10 asks for the next action to be performed in the sports domain of interest. After block 4350, control passes to block 4320 to select a league name, block 4340 to provide my quack sports scores, or to a block 4355 for runway information. A block 4355 corresponds to the runway described further with reference to FIGURE 37 as block 3750. Each subsystem of FIGURES 40-43 is shown by way of example only.

While the embodiments illustrated in the FIGURES and described above are presently preferred, it should be understood that these embodiments are

offered by way of example only. Other embodiments may include various data structures for simplifying access to the Internet via voice portals. The invention is not limited to a particular embodiment, but extends to various modifications, combinations, and permutations that nevertheless fall within the scope and spirit of the appended claims.

5

001.696154.4

WHAT IS CLAIMED IS:

1. A method of advertising, the method comprising:
maintaining an Internet-related communication session between a user
and a portal; and
during the communication session, selectively providing
5 advertisements based on any one of user constraints and sales criteria.
2. The method of claim 1, wherein the step of selectively providing
advertisements comprises:
playing an audio message identifying a product or service to be
advertised, including a query as to whether the user would like to hear more
10 information regarding the product or service;
identifying a response of the user; and
selectively playing an audio advertisement for the product or service,
if the response was affirmative.
3. The method of claim 2, wherein the step of playing an audio message
15 identifying a product or service is in response to a previous user selection.
4. The method of claim 2, wherein the step of playing an audio message
identifying a product or service comprises identifying a preference of the user and
selecting an advertisement for a product or service which corresponds to the
preference of the user.
- 20 5. The method of claim 4, wherein the step of identifying a preference
of the user comprises identifying the user and retrieving preference information
corresponding to the user, the preference information being stored in a database.
6. The method of claim 2, wherein the step of identifying a response of
the user comprises applying voice recognition techniques.
- 25 7. The method of claim 2, wherein the step of selectively playing an
audio advertisement comprises defining a set of advertisements, assigning weights to

each member of the set of advertisements, and selecting a member of the set of advertisements based on its assigned weight.

8. The method of claim 7, wherein the step of assigning weights to each member of the set of advertisements comprises prioritizing each member of the set of advertisements.

9. The method of claim 8, wherein the step of prioritizing each member of the set of advertisements comprises determining a ratio based on sales criteria corresponding to each advertisement of the set of advertisements.

10. The method of claim 7, further comprising making a record of the audio advertisement selectively played, the record being used in defining a cost of advertising for the audio advertisement.

11. The method of claim 2, wherein the step of identifying a response comprises playing a confirmation audio message to confirm the response.

12. The method of claim 1, wherein the step of maintaining an Internet-related communication session between a user and a portal comprises establishing a communication connection between a wireless application protocol (WAP) device and the portal.

13. The method of claim 1, wherein the step of maintaining a communication session between a user and a portal comprises establishing a communication connection between a web device and the portal.

14. The method of claim 1, wherein the step of maintaining an Internet-related communication session comprises communicating with a voice interface.

15. The method of claim 1, wherein the step of maintaining an Internet-related communication session comprises communicating with a personal computer (PC) interface.

16. A service which provides audio advertisements over a two way communication device during a communication session, the service comprising:

a user interface which coordinates communication of the service with a user; and

5 an advertising subsystem coupled to the user interface, the advertising subsystem being configured to coordinate the selective presentation of advertisements to the user;

whereby the advertisements include sponsorship advertisements which accompany each communication session, advertisements selectively played
10 based on particular attributes of the user, and advertisements selectively played based on permission by the user.

17. The service of claim 16, wherein the user interface comprises a receiver and a transmitter configured to communicate audio signals to and from the user.

15 18. The service of claim 16, further comprising at least one database coupled to the advertising subsystem, the at least one database storing information about the user and the advertisements played.

19. The service of claim 16, wherein the advertisements selectively played based on permission by the user are selected by the user voicing an
20 affirmative response to a query.

20. The service of claim 16, wherein advertisements selectively played based on particular attributes of the user comprise a prioritization based on the particular attributes of the user.

21. The service of claim 16, wherein advertisements selectively played
25 based on particular attributes of the user comprise a prioritization based on sales criteria associated with the advertisements.

22. A system for advertising using voice control, the system comprising:
means for maintaining a communication session between a user and a
portal; and

5 means for providing advertisements during the communication
session based on any one of user constraints and sales criteria.

23. The system of claim 22, wherein the means for providing
advertisements comprises:

10 means for playing an audio message identifying a product or service
to be advertised, including a query as to whether a user would like to hear more
information regarding the product or service;

means for identifying a user's response; and

means for selectively playing an audio advertisement for the product
or service, if the user's response was affirmative.

15 24. The system of claim 23, wherein the means for playing an audio
message identifying a product or service is in response to a previous selection.

25. The system of claim 23, wherein the means for playing an audio
message identifying a product or service comprises means for identifying a
preference of the user and selecting an advertisement for a product or service which
corresponds to the preference of the user.

20 26. The system of claim 24, wherein the means for identifying a
preference of the user comprises means for identifying the user and retrieving
preference information corresponding to the user, the preference information being
stored in a database.

25 27. The system of claim 23, wherein the means for identifying a user's
response comprises applying voice recognition techniques.

28. The system of claim 23, wherein the means for selectively playing an
audio advertisement comprises means for defining a set of advertisements, means

001.696154.4

for assigning sales criteria to each member of the set of advertisements, and means for selecting a member of the set of advertisements based on its sales criteria.

29. The system of claim 28, wherein the means for assigning sales criteria comprises means for determining achieved advertisement delivery rate.

5 30. The system of claim 28, further comprising means for making a record of the audio advertisement selectively played, the record being used in defining a cost of advertising for the audio advertisement.

31. The system of claim 23, wherein the means for identifying a user's response comprises means for playing a confirmation audio message to confirm the
10 identified listener's response.

32. A method of advertising comprising:
generating a set of possible advertisements, the set of possible advertisements being related to a context;
ordering the set of possible advertisements based on a sales criteria
15 associated with each advertisement of the set of possible advertisements; and
providing advertisements from the set of possible advertisements based on the ordering.

33. The method of claim 32, wherein the context comprises information on the user's preferences, user's location, and user's personal characteristics.

20 34. The method of claim 32, wherein the sales criteria comprise information on duration of the advertising contract, information on the number of times the advertisement is to be played, and information on the number of times the advertisement has already been played.

25 35. The method of claim 32, wherein the step of providing advertisements from the set of possible advertisements comprises querying the user on whether to play a particular advertisement in its entirety.

36. The method of claim 32, wherein the step of providing advertisements from a set of possible advertisements comprises selecting an advertisement based on prior user selections.

37. The method of claim 32, wherein the step of ordering the set of possible advertisements based on a sales criteria associated with each advertisement of the set of possible advertisements comprises providing billing information on advertisements used based on a per use rate of charge.

38. The method of claim 32, wherein the step of providing advertisements from the set of possible advertisements based on the ordering comprises playing an audio advertisement via a voice interface.

39. The method of claim 32, wherein the step of providing advertisements from the set of possible advertisements based on the ordering comprises displaying advertisements on a wireless application protocol (WAP) device.

40. The method of claim 32, further comprising recording which particular advertisements were provided to a particular user to form a user record.

41. The method of claim 40, wherein the step of ordering the set of possible advertisements based on a sales criteria associated with each advertisement of the set of possible advertisements comprises identifying played advertisements for a particular user from the user record.

42. A system of advertising comprising:
 means for generating a set of possible advertisements, the set of possible advertisements being related to a context;
 means for ordering the set of possible advertisements based on a sales criteria associated with each advertisement of the set of possible advertisements; and
 means for providing advertisements from the set of possible advertisements based on the ordering.

001.696154.4

43. The system of claim 42, wherein the means for providing advertisements from a set of possible advertisements comprises means for querying the user on whether to play a particular advertisement in its entirety.

44. The system of claim 42, wherein the means for ordering the set of possible advertisements based on a sales criteria associated with each advertisement of the set of possible advertisements comprises means for assigning weights to reflect purchasing behavior characteristics of the user.

45. The system of claim 42, wherein the means for ordering the set of possible advertisements based on a sales criteria associated with each advertisement of the set of possible advertisements comprises means for providing billing information on advertisements used based on a per use rate of charge.

46. A computer program product comprising computer readable program code for advertising with an Internet portal, the program code in the computer program product comprising:

15 first computer readable program code for generating a set of possible advertisements;

second computer readable program code for ordering the set of possible advertisements based on a sales criteria associated with each advertisement of the set of possible advertisements; and

20 third computer readable program code for providing advertisements from the set of possible advertisements based on the ordering.

47. The program code of claim 46, wherein the first computer readable program code for generating a set of possible advertisements comprises computer readable program code for selecting advertisements based on user constraints.

25 48. The program code of claim 46, wherein the second computer readable program code for ordering the set of possible advertisements based on a sales criteria associated with each advertisement of the set of possible advertisements

comprises computer readable program code for assigning values to advertisements based on contractual arrangements and attractiveness of the user.

49. The program code of claim 46, wherein the third computer readable program code for providing advertisements from the set of possible advertisements based on ordering comprises computer readable program code for transforming semantically structure data and providing the data via a speech interface.

50. The program code of claim 46, wherein the third computer readable program code for providing advertisements from the set of possible advertisements based on ordering comprises computer readable program code for transmitting advertisements to a wireless application protocol (WAP) device.

51. The program code of claim 46, wherein the third computer readable program code for providing advertisements from the set of possible advertisements based on ordering comprises computer readable program code for transforming internet-based information into speech or vocal transmission over the telephone.

001.696154.4

**SYSTEM AND METHOD FOR ADVERTISING WITH AN INTERNET
VOICE PORTAL**

ABSTRACT OF THE DISCLOSURE

- 5 A method of advertising includes maintaining an Internet-related communication session between a user and a portal and, during the communication session, selectively providing advertisements based on any one of user constraints, sales criteria, and context.

001.696154.4

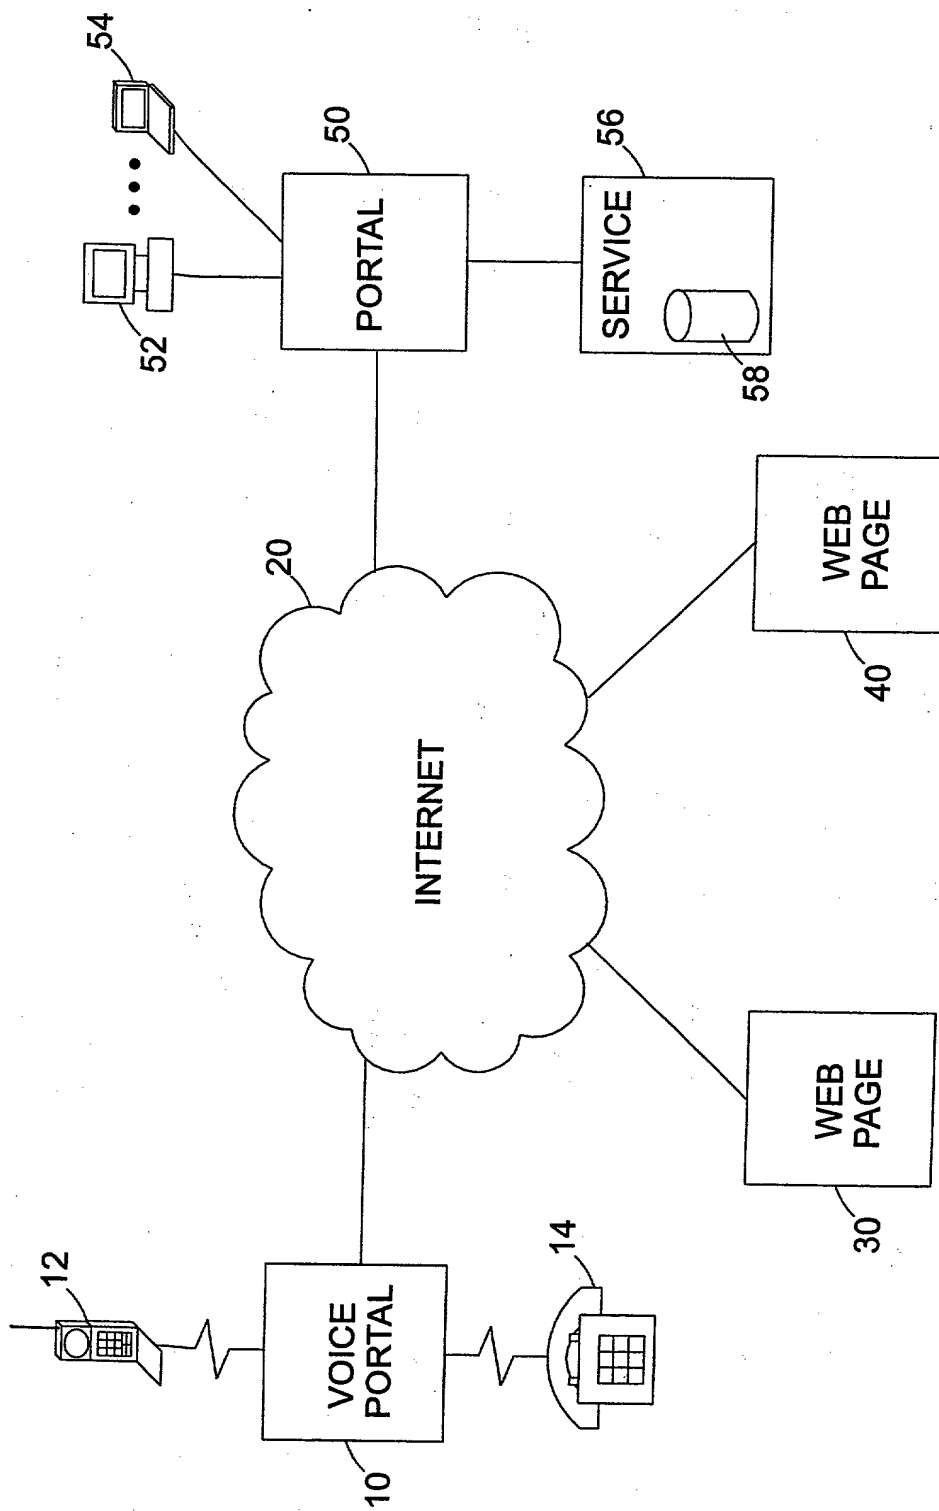


FIG. 1


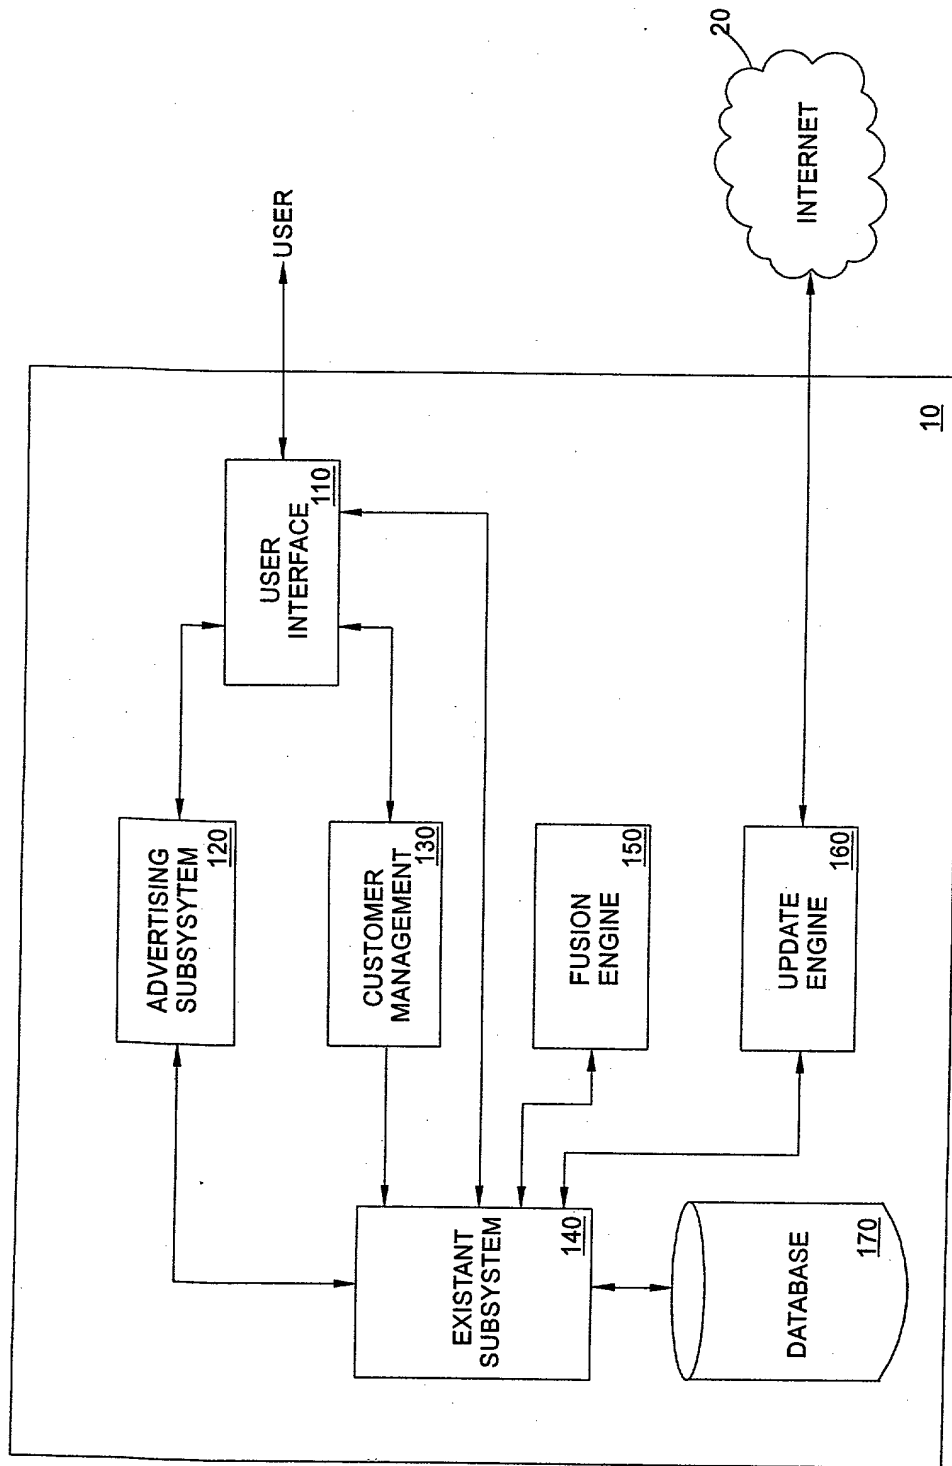


FIG. 2

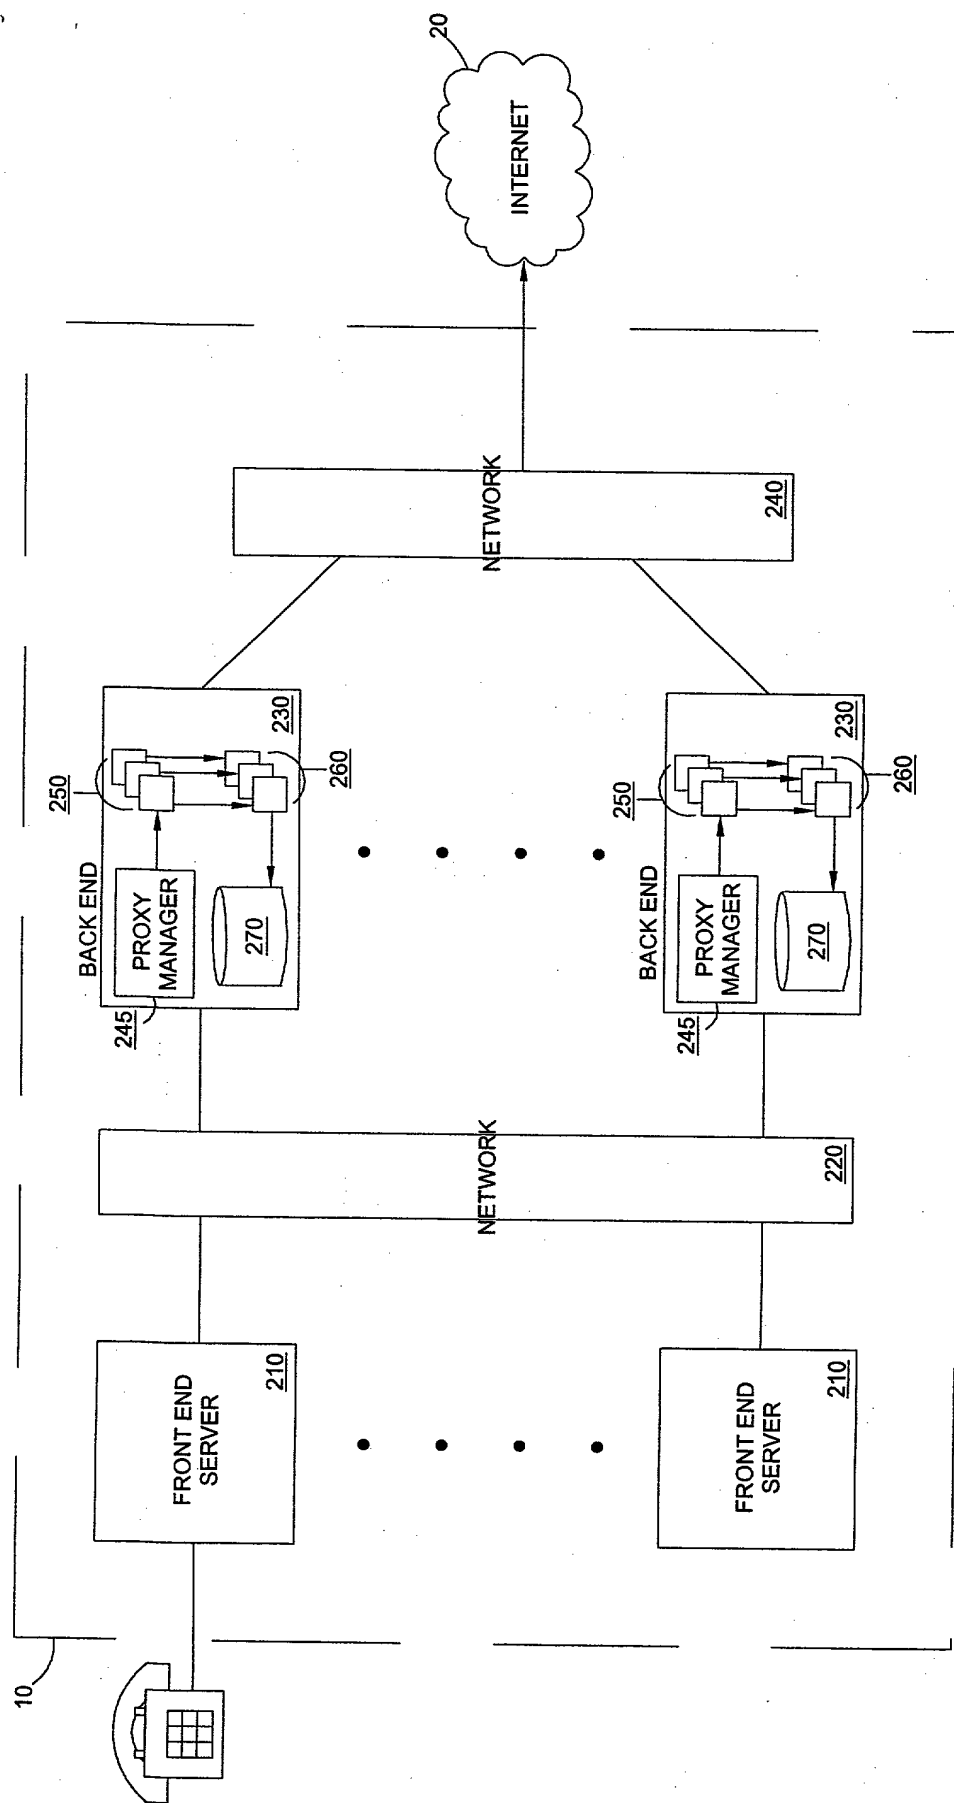

மே

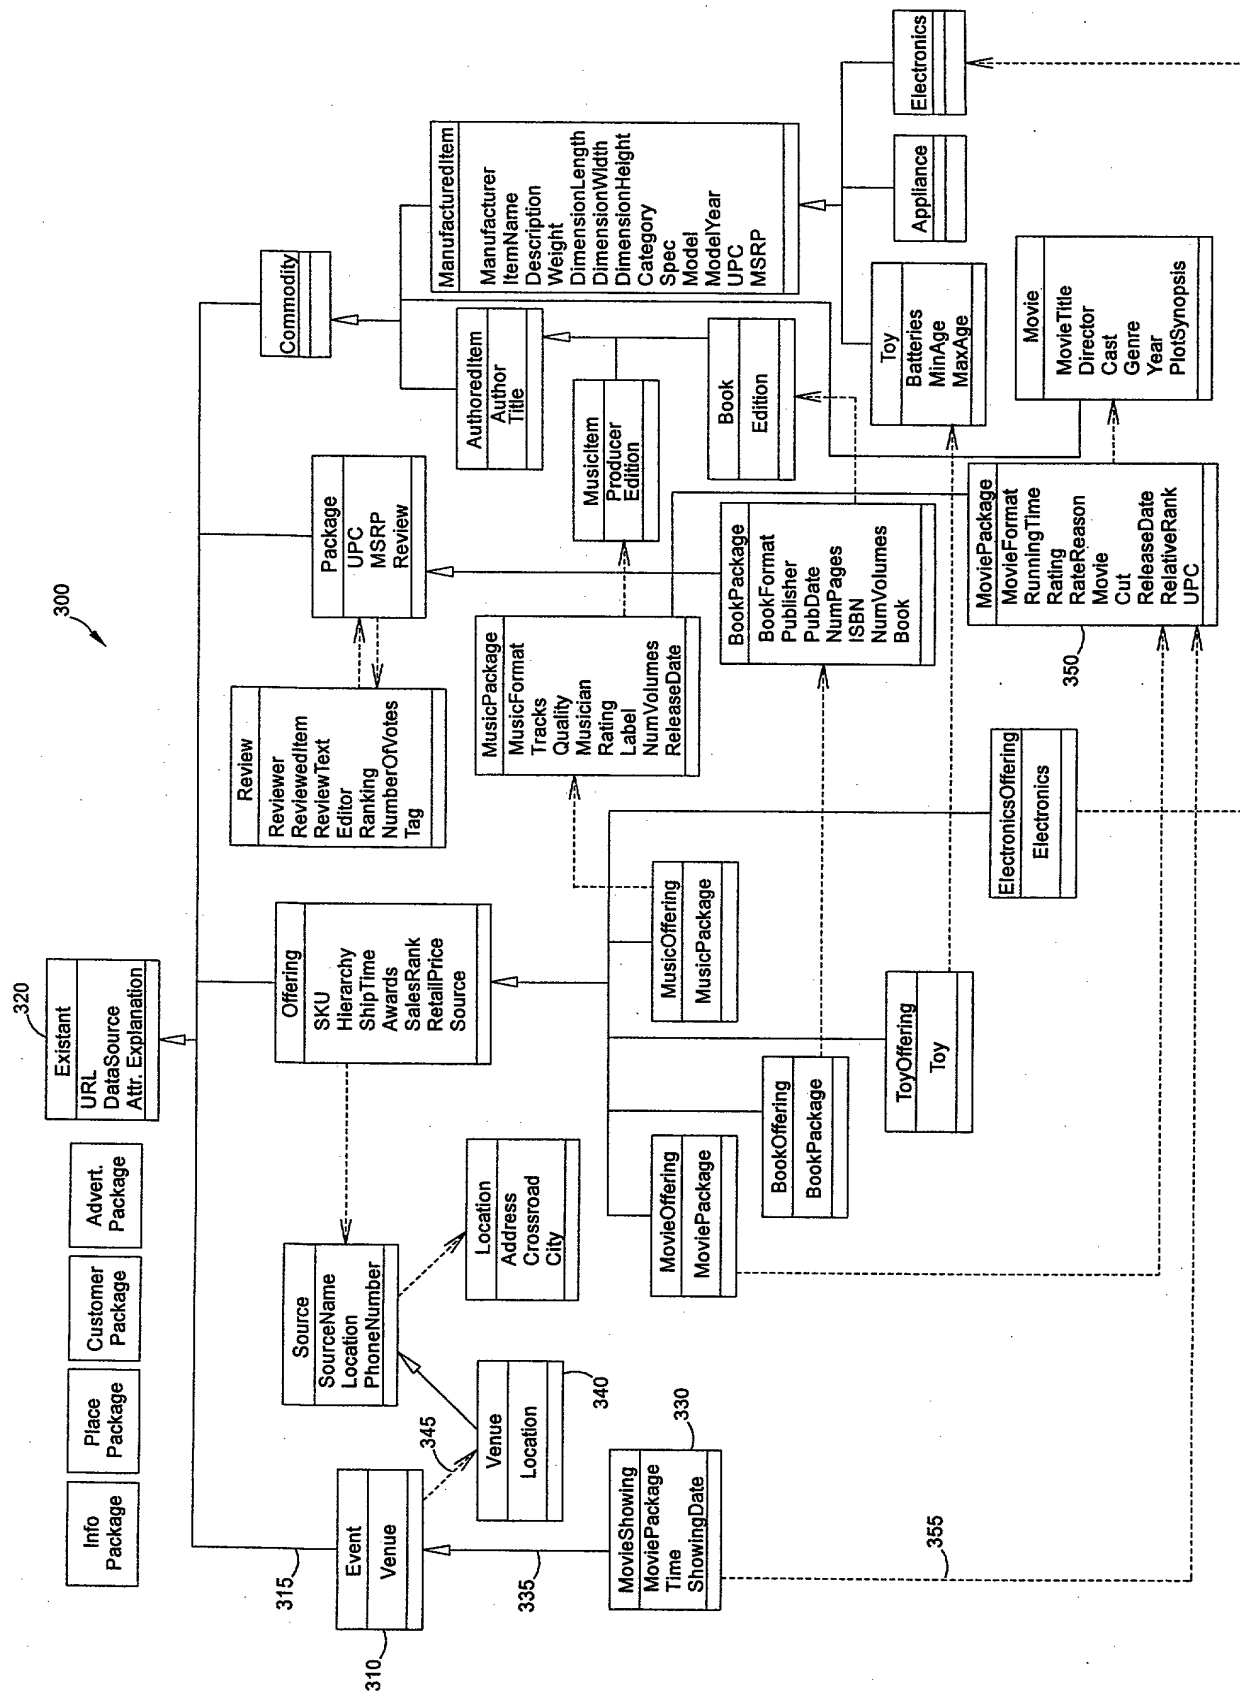


FIG. 4

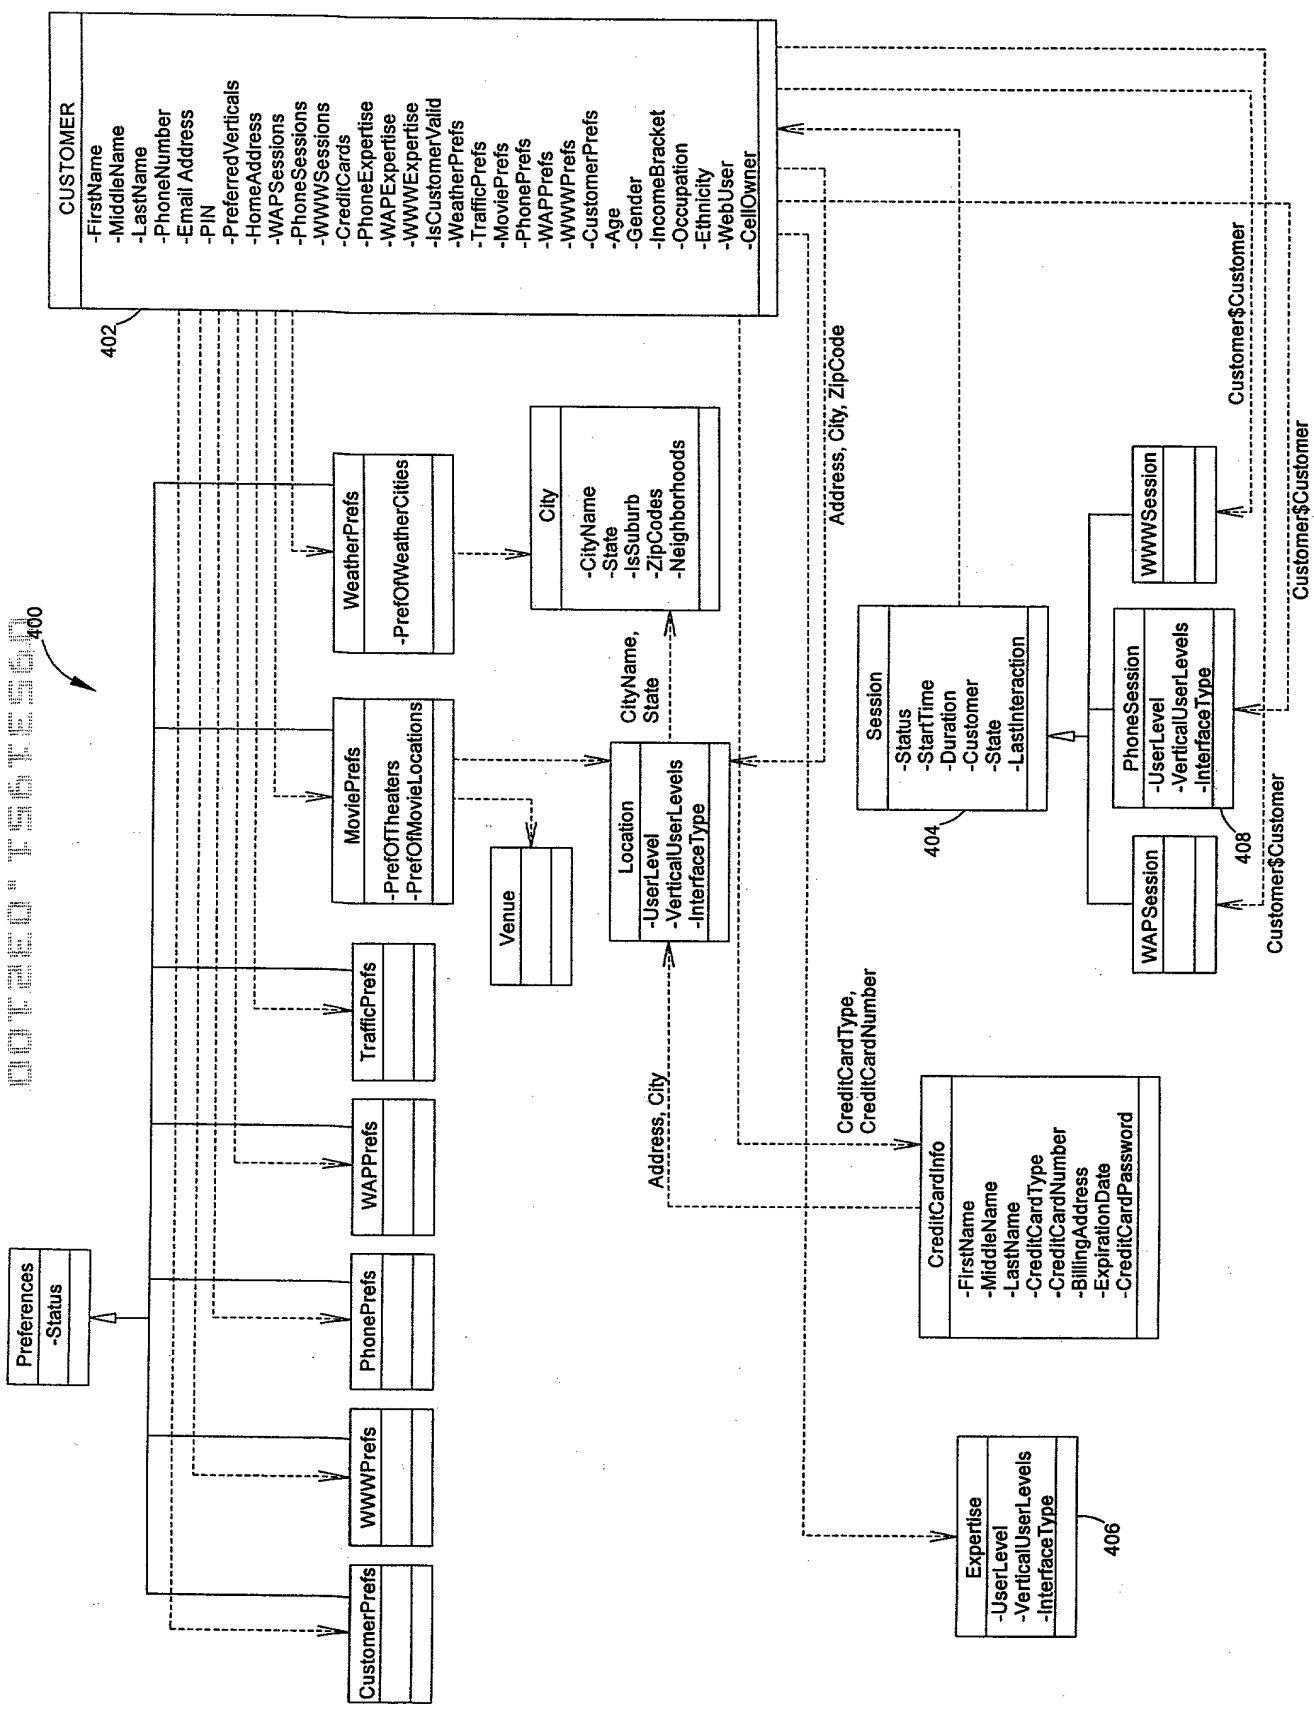


FIG. 5

450




FIG. 6

```
graph TD; 700 --> 710[WEB PAGE FOUND]; 710 --> 720[INFORMATION IDENTIFIED ON PAGE USING A CHOSEN FORM WHICH OVERLAYS THE PAGE TO FILTER OUT INFORMATION]; 720 --> 730[RULES USED TO IDENTIFY CHARACTERISTIC INFORMATION OR ATTRIBUTES WHICH DEFINE WHAT EXISTANT IS]; 730 --> 740[ATTRIBUTES ORGANIZED WITHIN EXISTANT AND EXISTANT STORED IN DATABASE];
```

700

710 WEB PAGE FOUND

720 INFORMATION IDENTIFIED ON PAGE USING A CHOSEN FORM WHICH OVERLAYS THE PAGE TO FILTER OUT INFORMATION

730 RULES USED TO IDENTIFY CHARACTERISTIC INFORMATION OR ATTRIBUTES WHICH DEFINE WHAT EXISTANT IS

740 ATTRIBUTES ORGANIZED WITHIN EXISTANT AND EXISTANT STORED IN DATABASE

FIG. 7

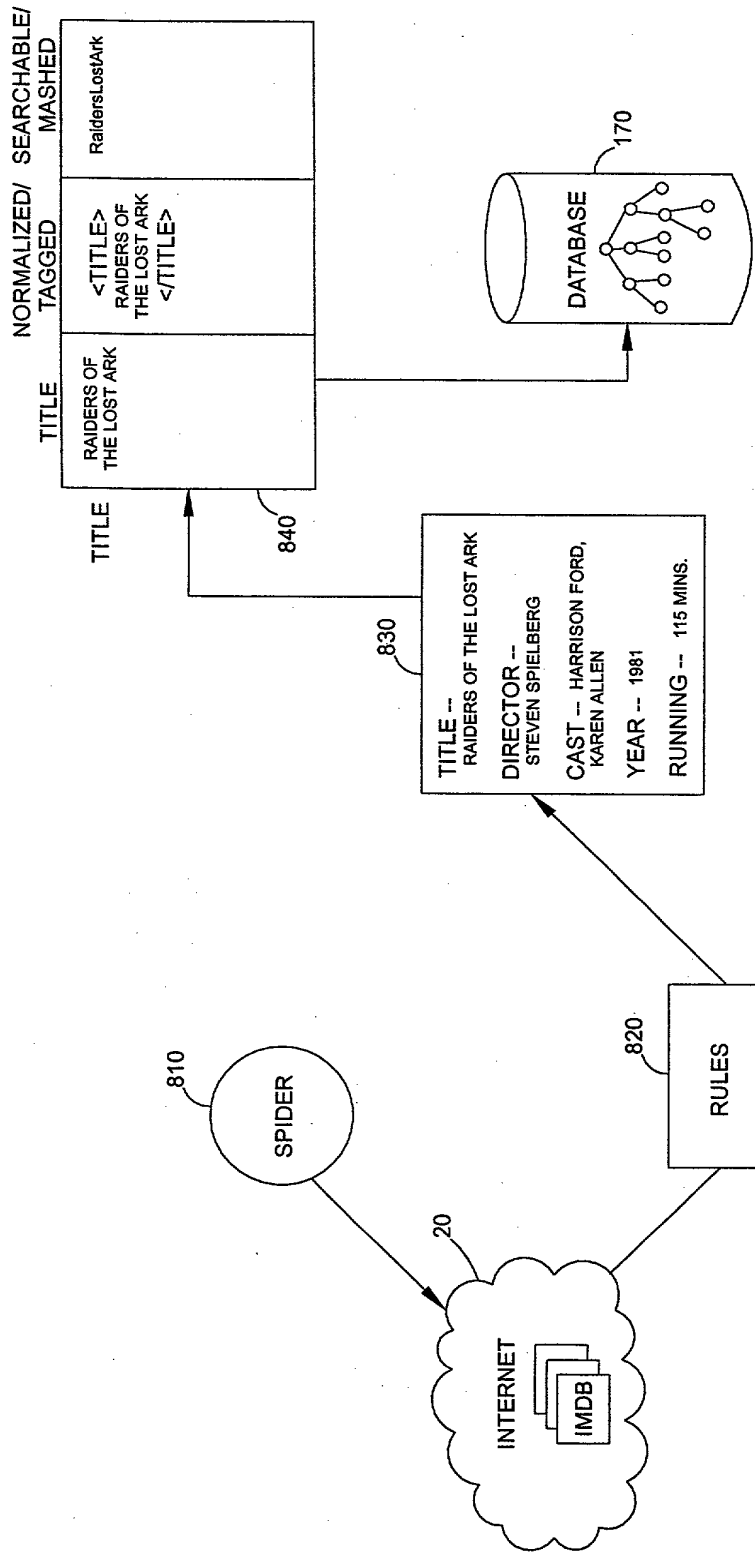


FIG. 8

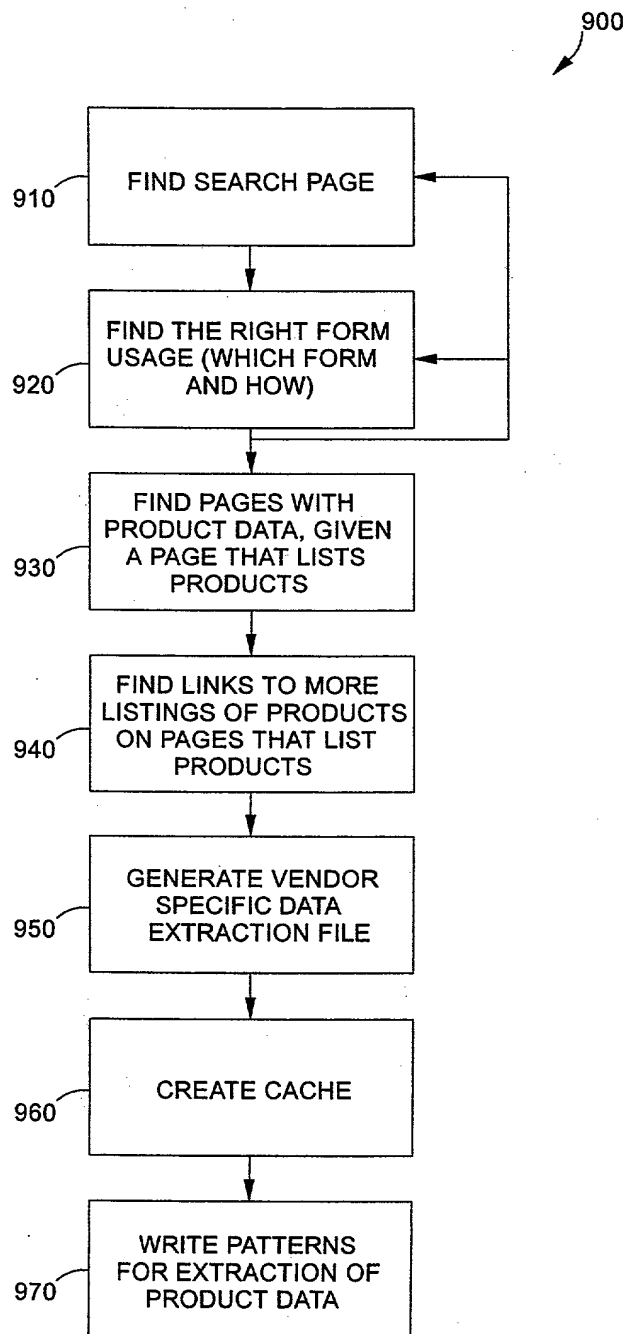


FIG. 9

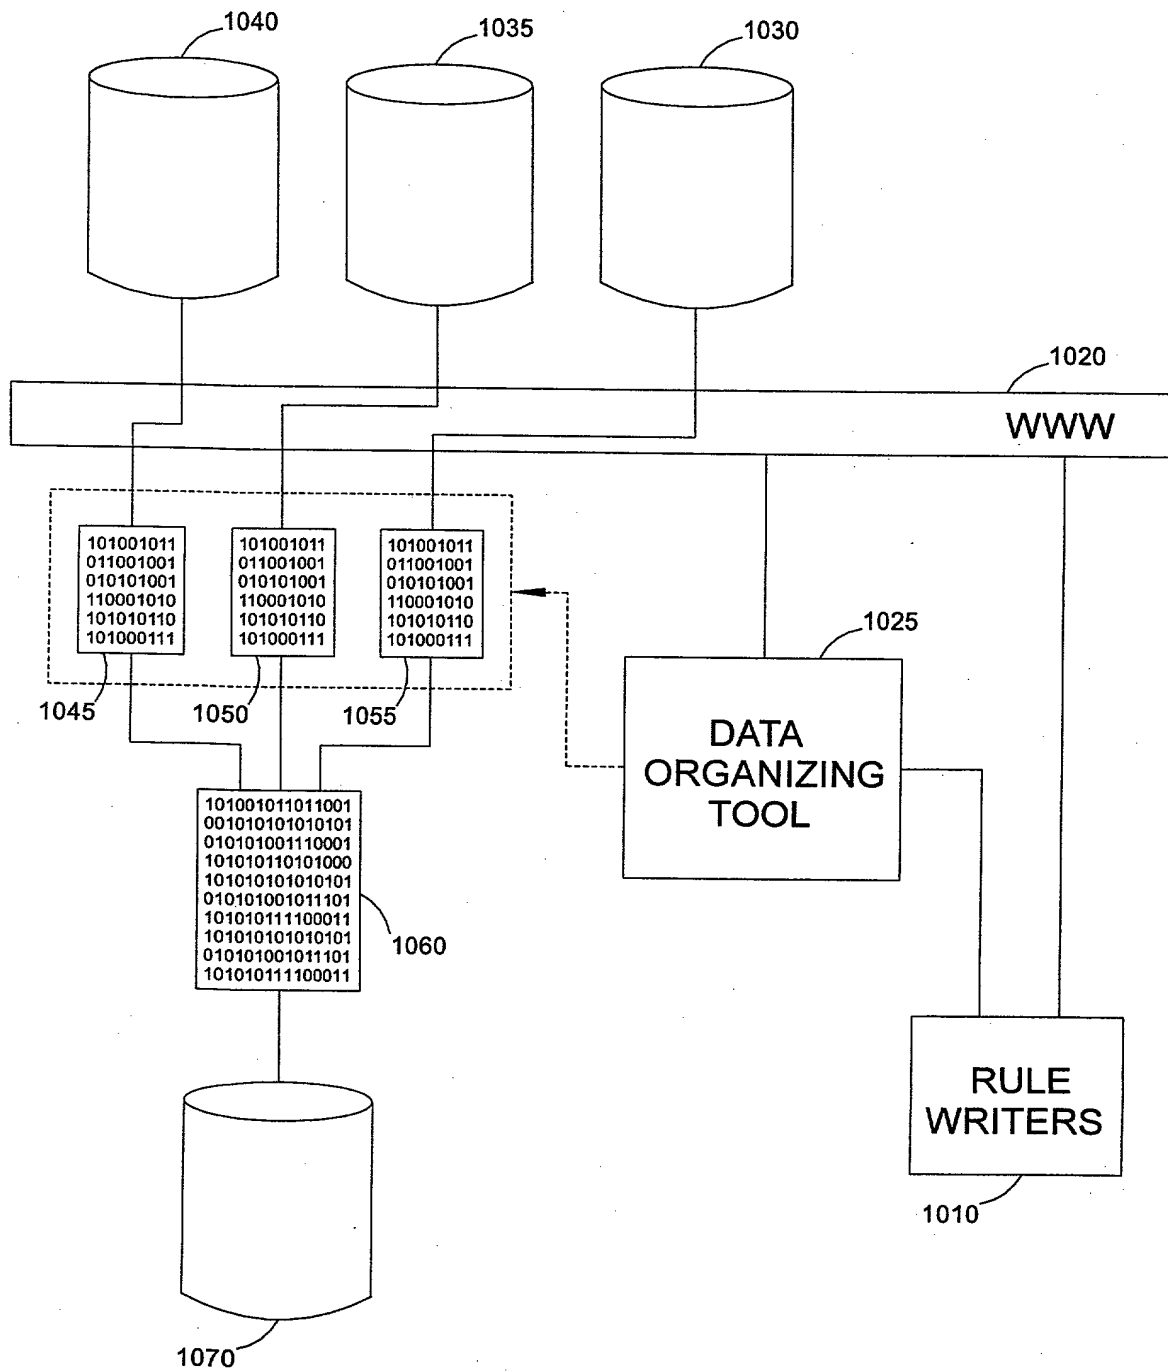


FIG. 10

status: idle

query: SDE

spider: full

vendor: New

Type:

URL:

DataSource:

QID:

Hierarchy:

Prod Data Area:

<

>

1 / 1

<

>

Run

Stop

1 / 1

<

>

1

URL

View Load

FIG. 11

1200

NewVendor

This routine generates initial versions of all files, needed in the rule writing process. If the file that QUECK wants to generate already exists, a back-up of the original file is saved in /home/karen/.QUECK/Rules.bu or /home/karen/.QUECK/RuleFunctions.bu


Insert the name of the new vendor.
(Illegal characters are automatically replaced.)

AmazonBook

Cancel Done

FIG. 12

1300

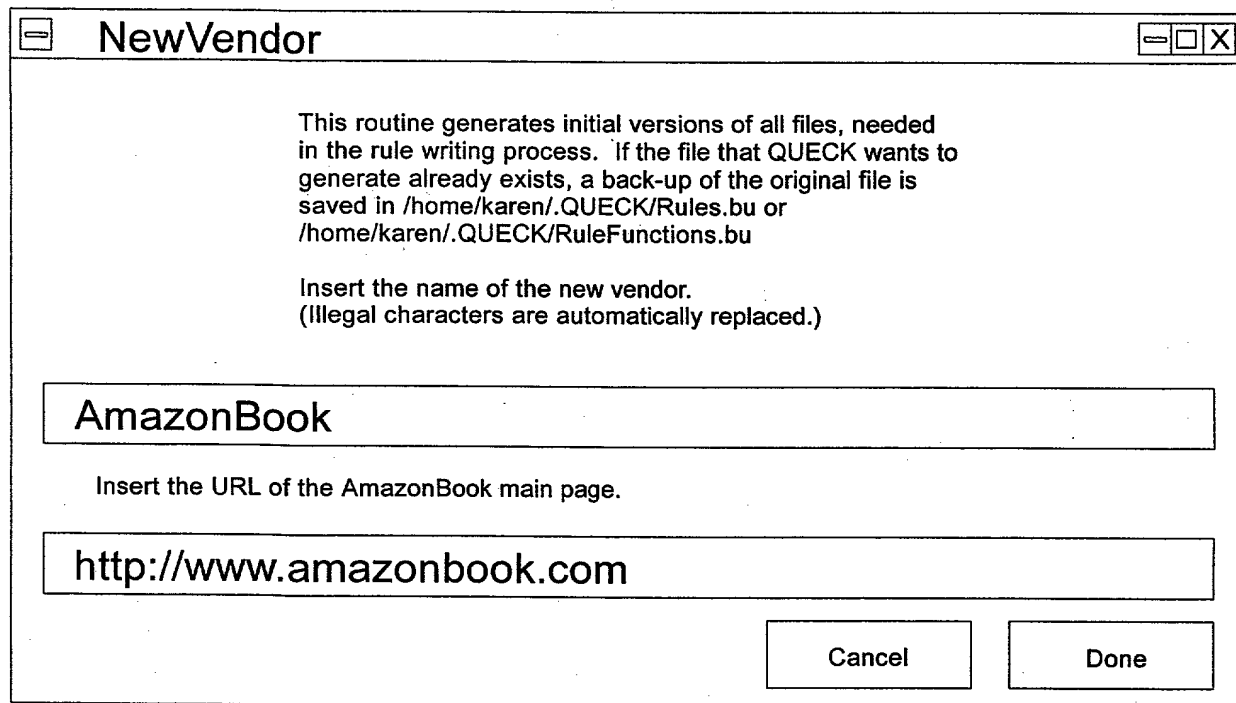

NewVendor

This routine generates initial versions of all files, needed in the rule writing process. If the file that QUECK wants to generate already exists, a back-up of the original file is saved in /home/karen/.QUECK/Rules.bu or /home/karen/.QUECK/RuleFunctions.bu

Insert the name of the new vendor.
(Illegal characters are automatically replaced.)

AmazonBook


Insert the URL of the AmazonBook main page.

http://www.amazonbook.com

Cancel Done

FIG. 13

1400

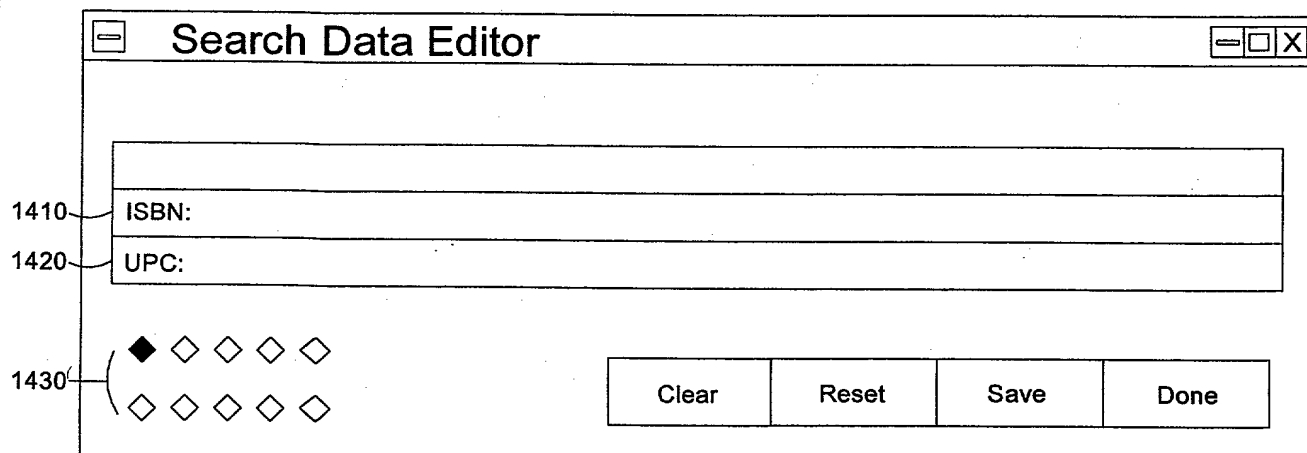

Search Data Editor

1410 ISBN:

1420 UPC:

1430

Clear Reset Save Done

FIG. 14

1500

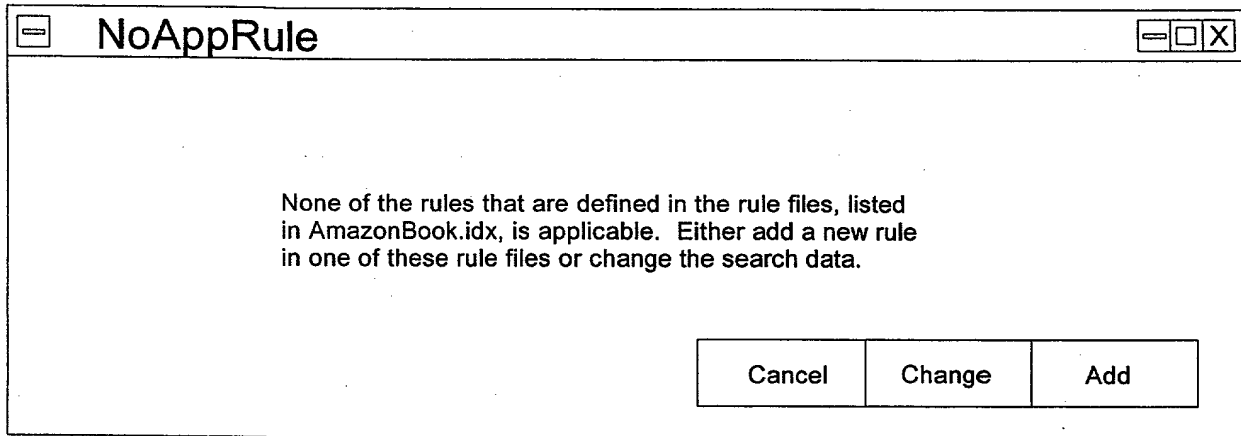


FIG. 15

1600

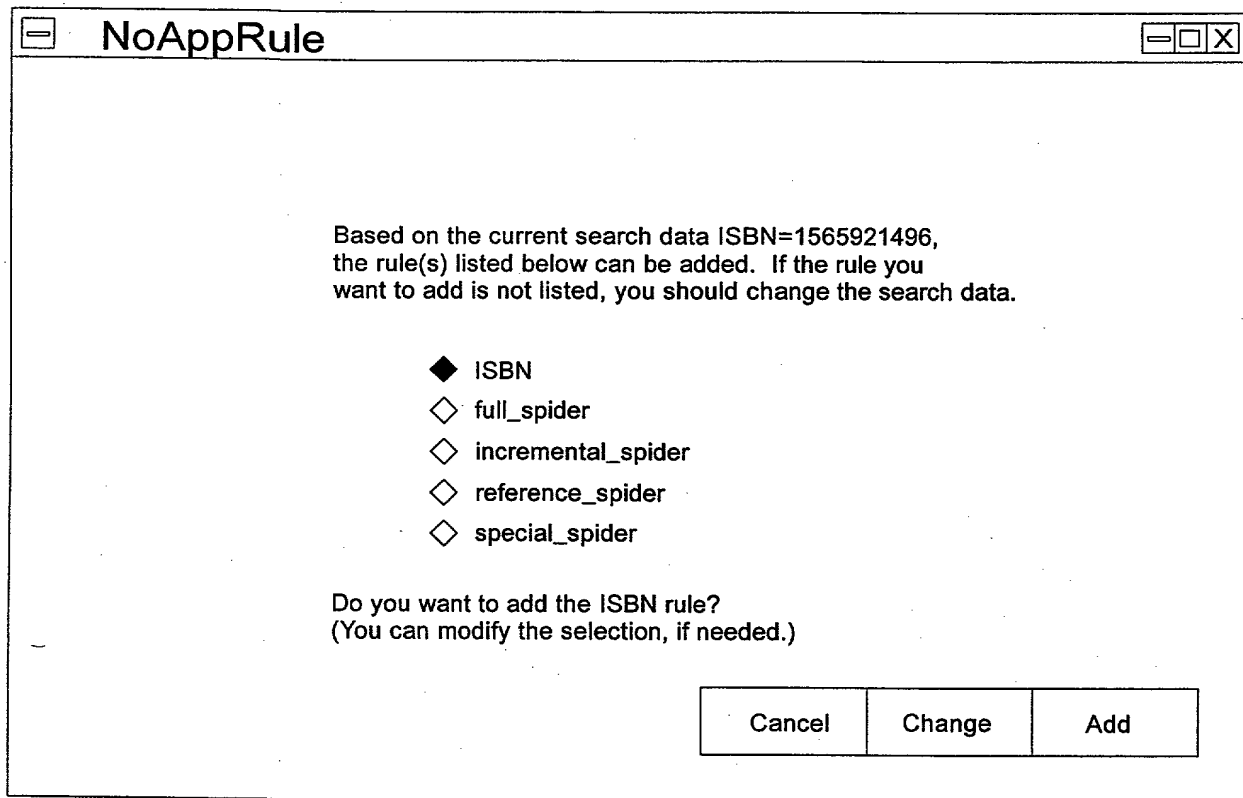


FIG. 16

1700

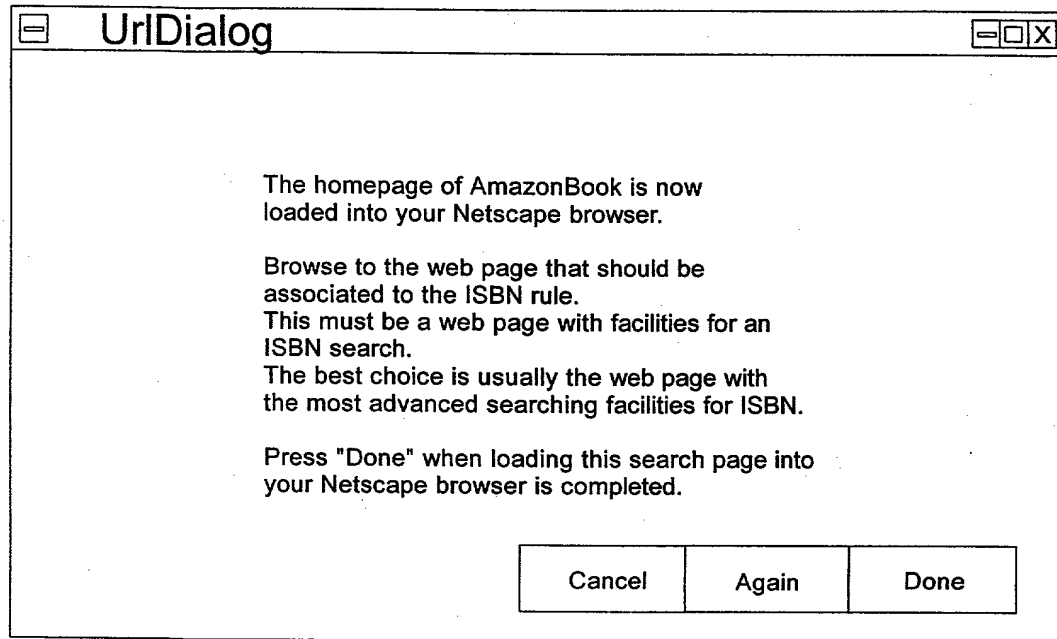


FIG. 17

1800


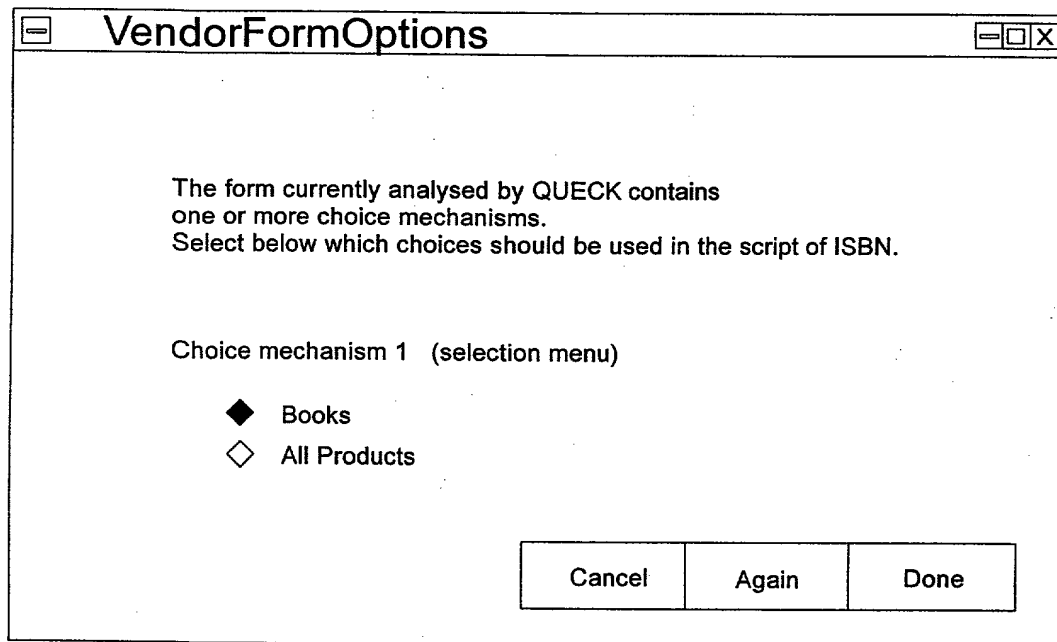


FIG. 18


1900

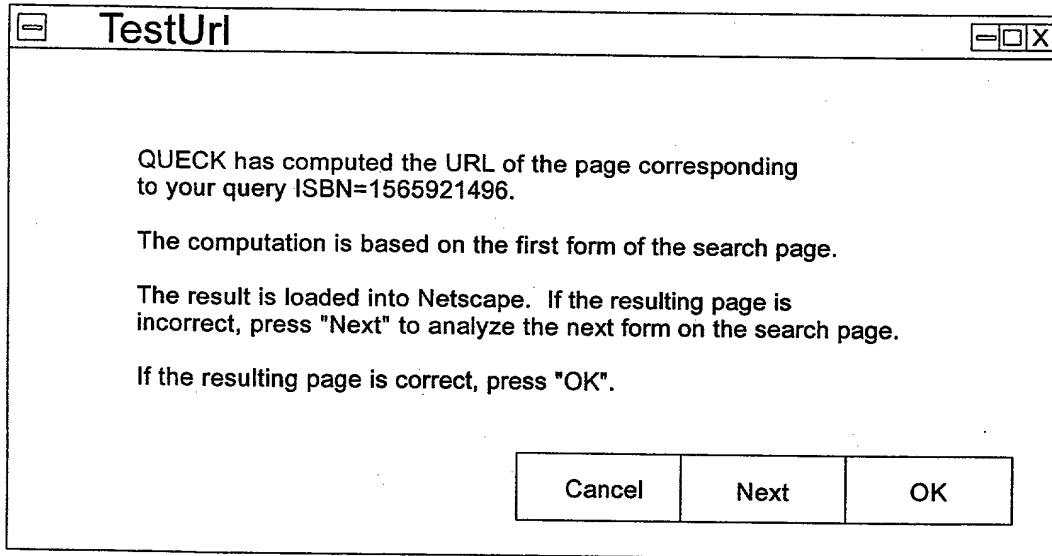

A dialog box titled "TestUrl" with a standard Windows-style title bar (minimize, maximize, close buttons). The text inside reads: "QUECK has computed the URL of the page corresponding to your query ISBN=1565921496. The computation is based on the first form of the search page. The result is loaded into Netscape. If the resulting page is incorrect, press 'Next' to analyze the next form on the search page. If the resulting page is correct, press 'OK'." At the bottom right, there are three buttons: "Cancel", "Next", and "OK".

FIG. 19

2000

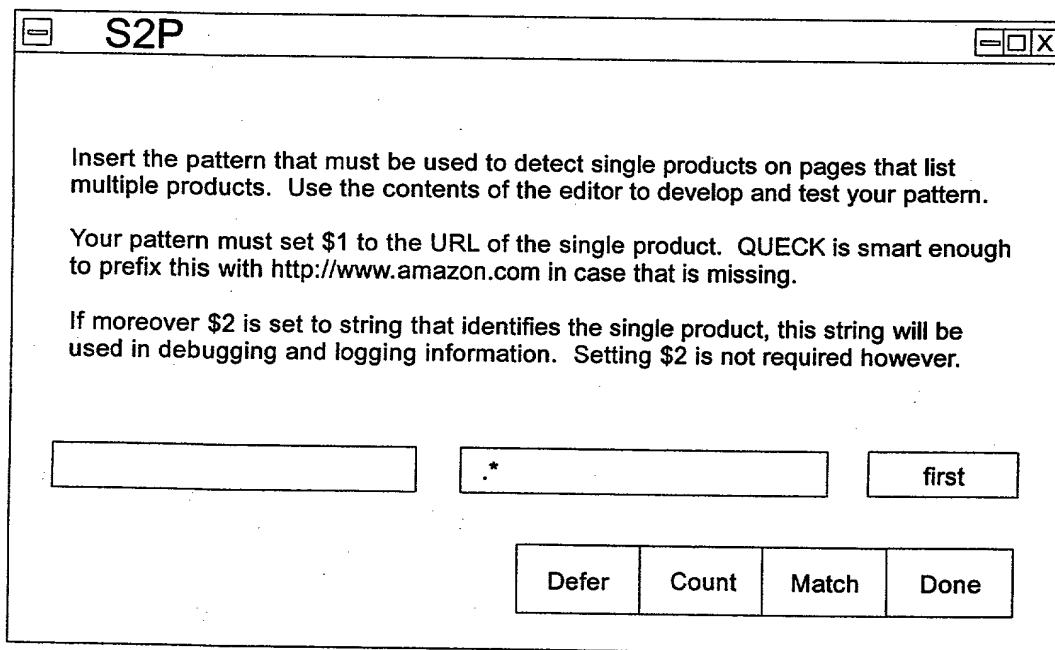

A dialog box titled "S2P" with a standard Windows-style title bar. The text inside reads: "Insert the pattern that must be used to detect single products on pages that list multiple products. Use the contents of the editor to develop and test your pattern. Your pattern must set \$1 to the URL of the single product. QUECK is smart enough to prefix this with http://www.amazon.com in case that is missing. If moreover \$2 is set to string that identifies the single product, this string will be used in debugging and logging information. Setting \$2 is not required however." Below the text, there are two input fields. The first is empty. The second contains the text ". *". To the right of the second input field is a button labeled "first". At the bottom right, there are four buttons: "Defer", "Count", "Match", and "Done".

FIG. 20





[illegible]

FIG. 21



FIG. 22

2300



SpiderSubr

Insert here the URL of the page, currently loaded into Netscape. This is the page associated to the full_spider rule.

Next, set "SpiderDepth" to the maximum number of links that has to be followed from the top of the hierarchy to the actual product pages. Note that in some cases this number depends on the branch you follow. Setting "SpiderDepth" too low creates a spider that misses products that are nested too deep in the hierarchy. Setting "SpiderDepth" too high leads to a decrease in performance.

SpiderDepth

1

UpperBound

0

Done

FIG. 23

2400

SpiderSubr

http://www.amazon.com/exec/obidos/subst/home/home.html/002-5797861-2625002

The spider you specified is a level - 1 spider.
This means that your spider has the following form:

level - 0: The top page (accessed via the URL above)

level - 1: The single product pages to be spidered

Insert below the pattern used to detect level - 1 pages on the top page.

Your pattern must set \$1 to the URLs of the child pages. QUECK is smart enough to prefix this URL with http://www.amazon.com in case it is missing. If your pattern also sets \$2, that value will be used in the hierarchy attributes.

first

1st Level

*

Cancel

Count

Match

Build

FIG. 24

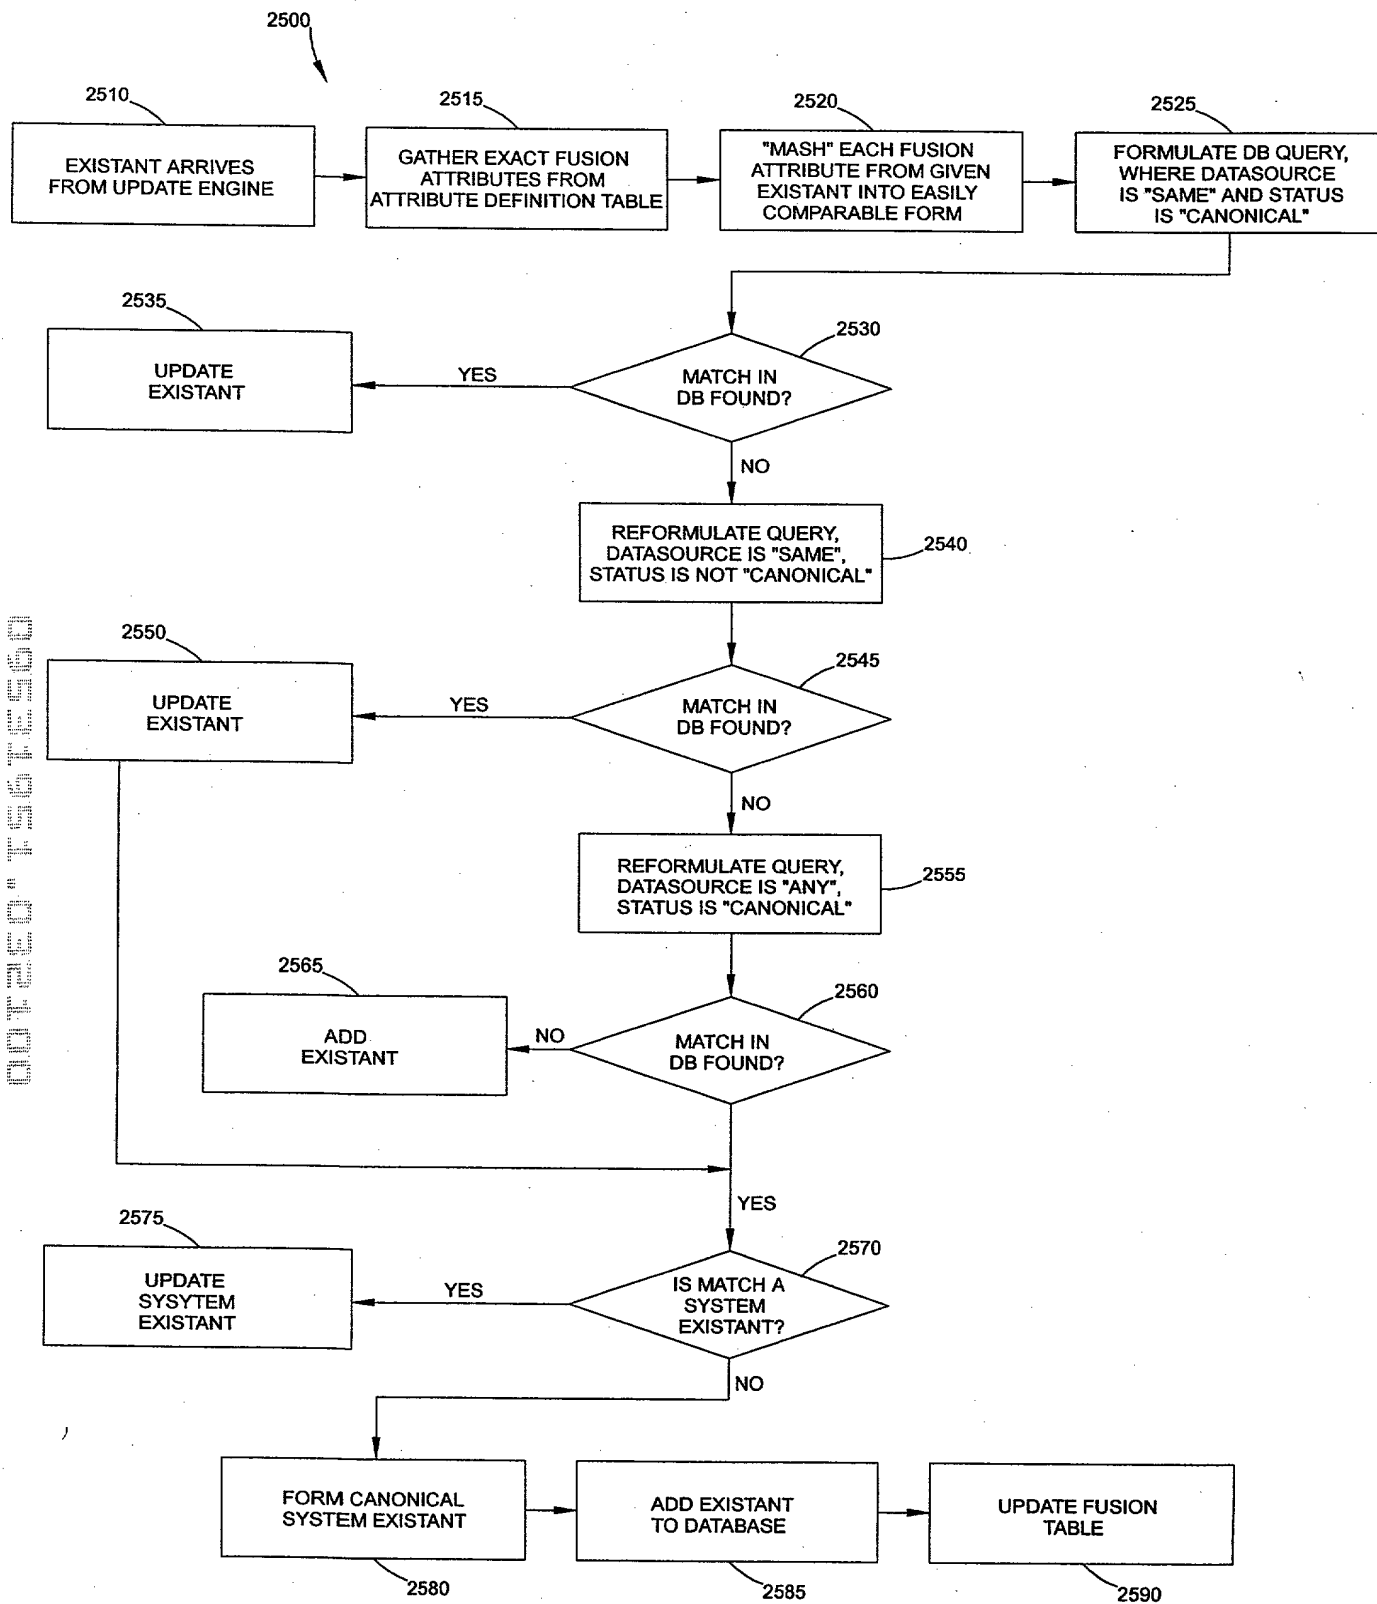


FIG. 25

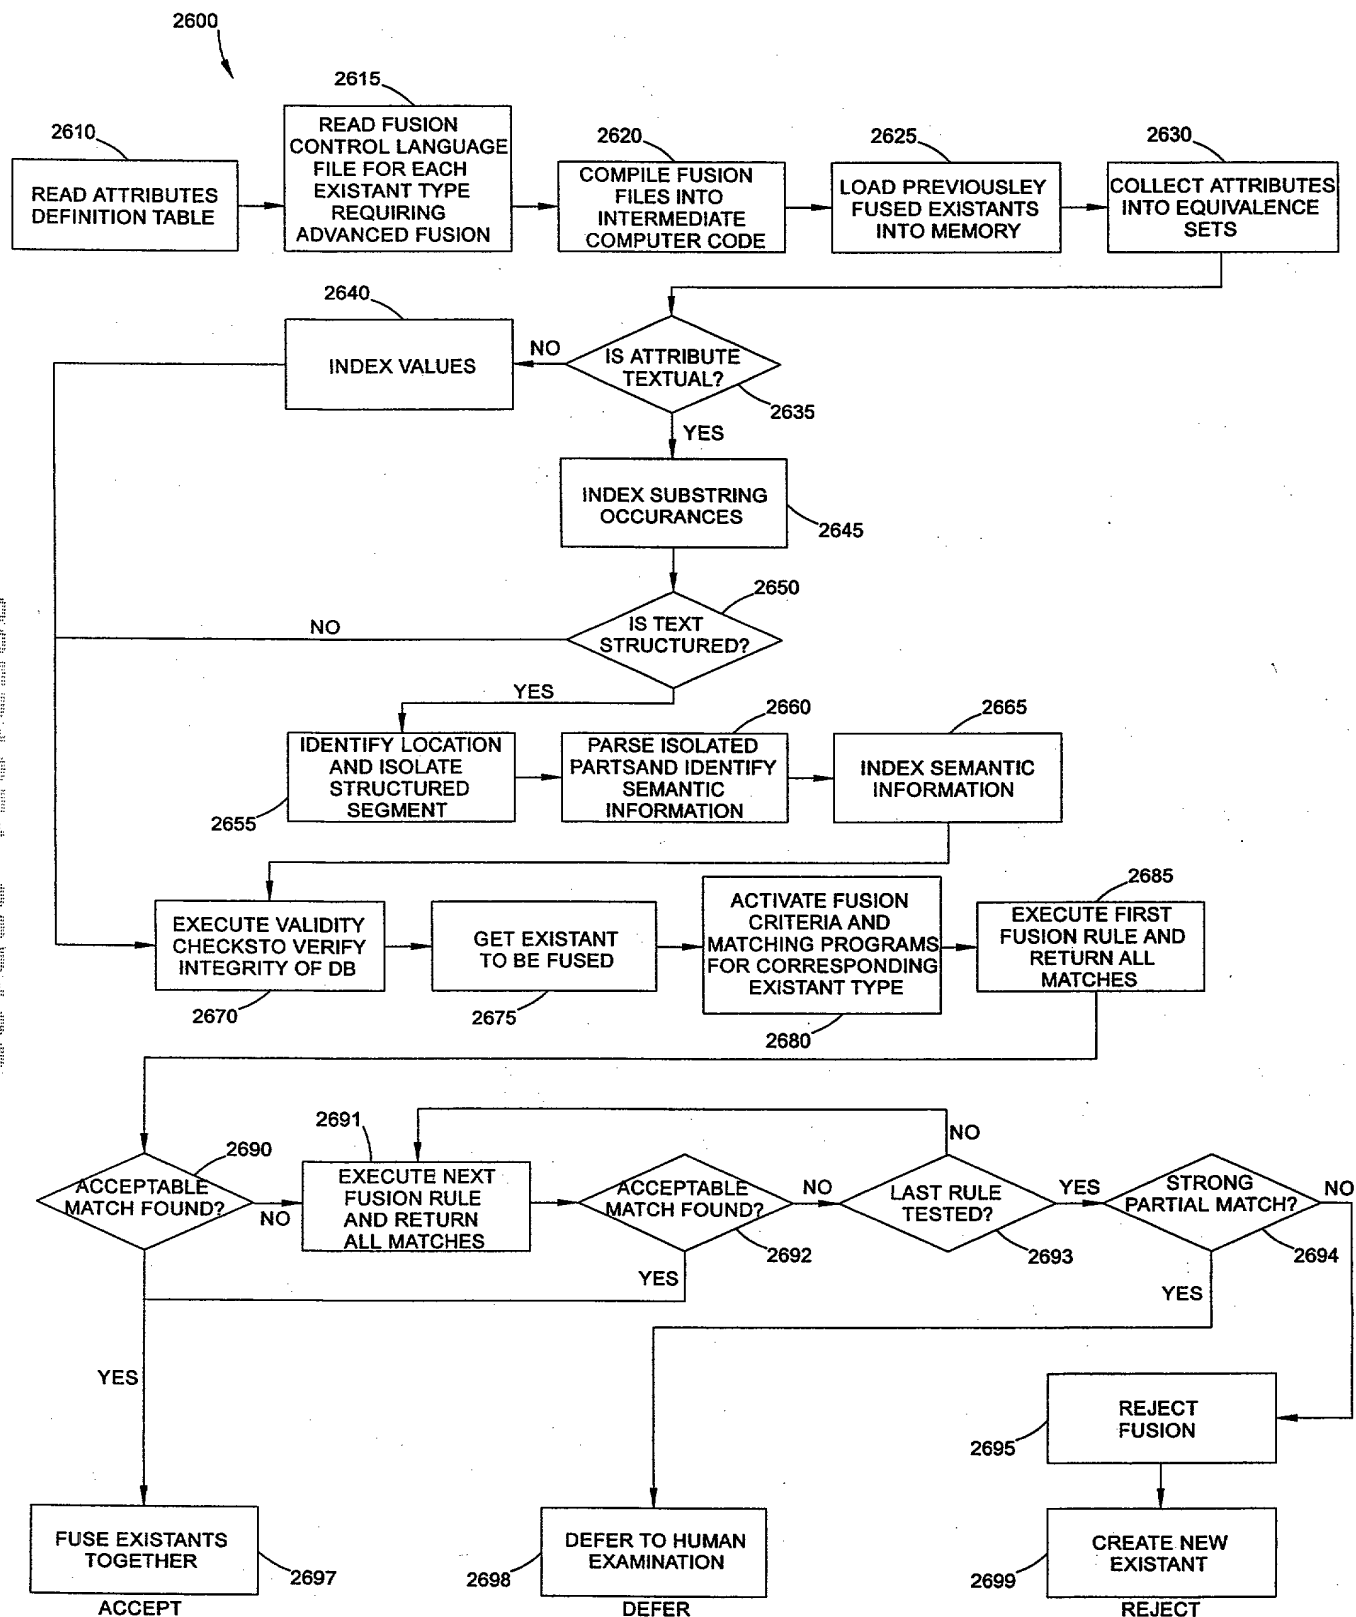


FIG. 26

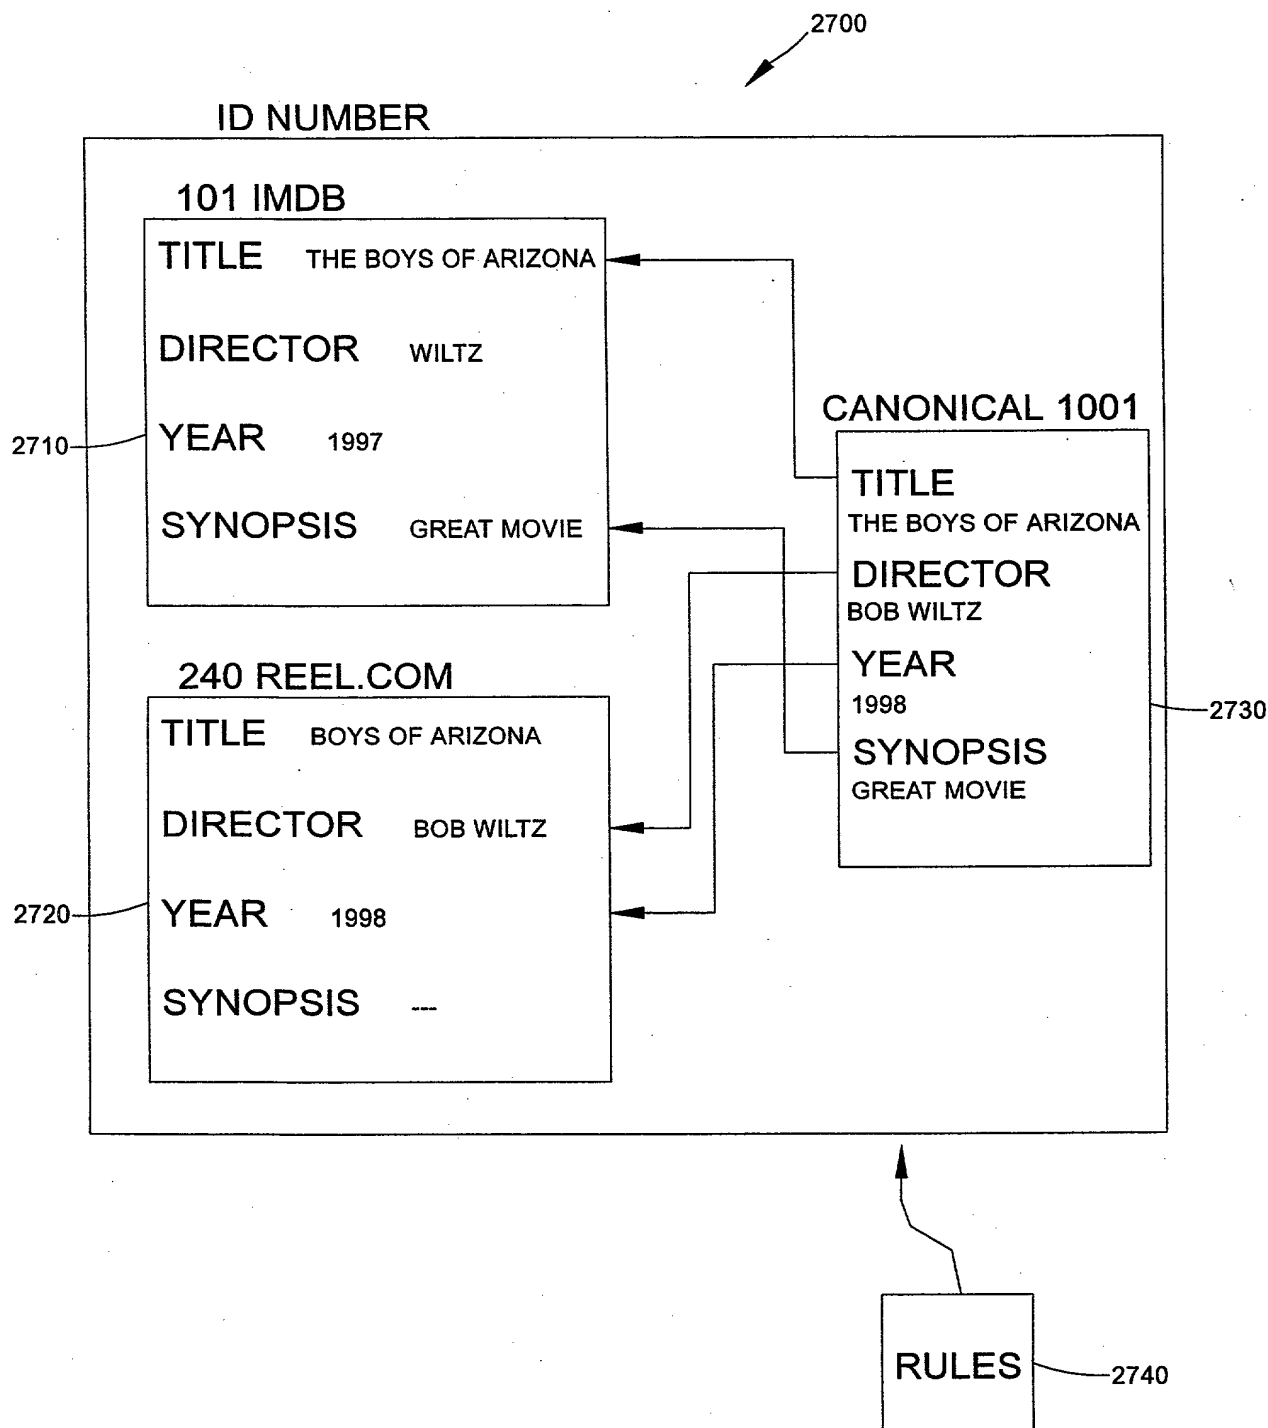


FIG. 27

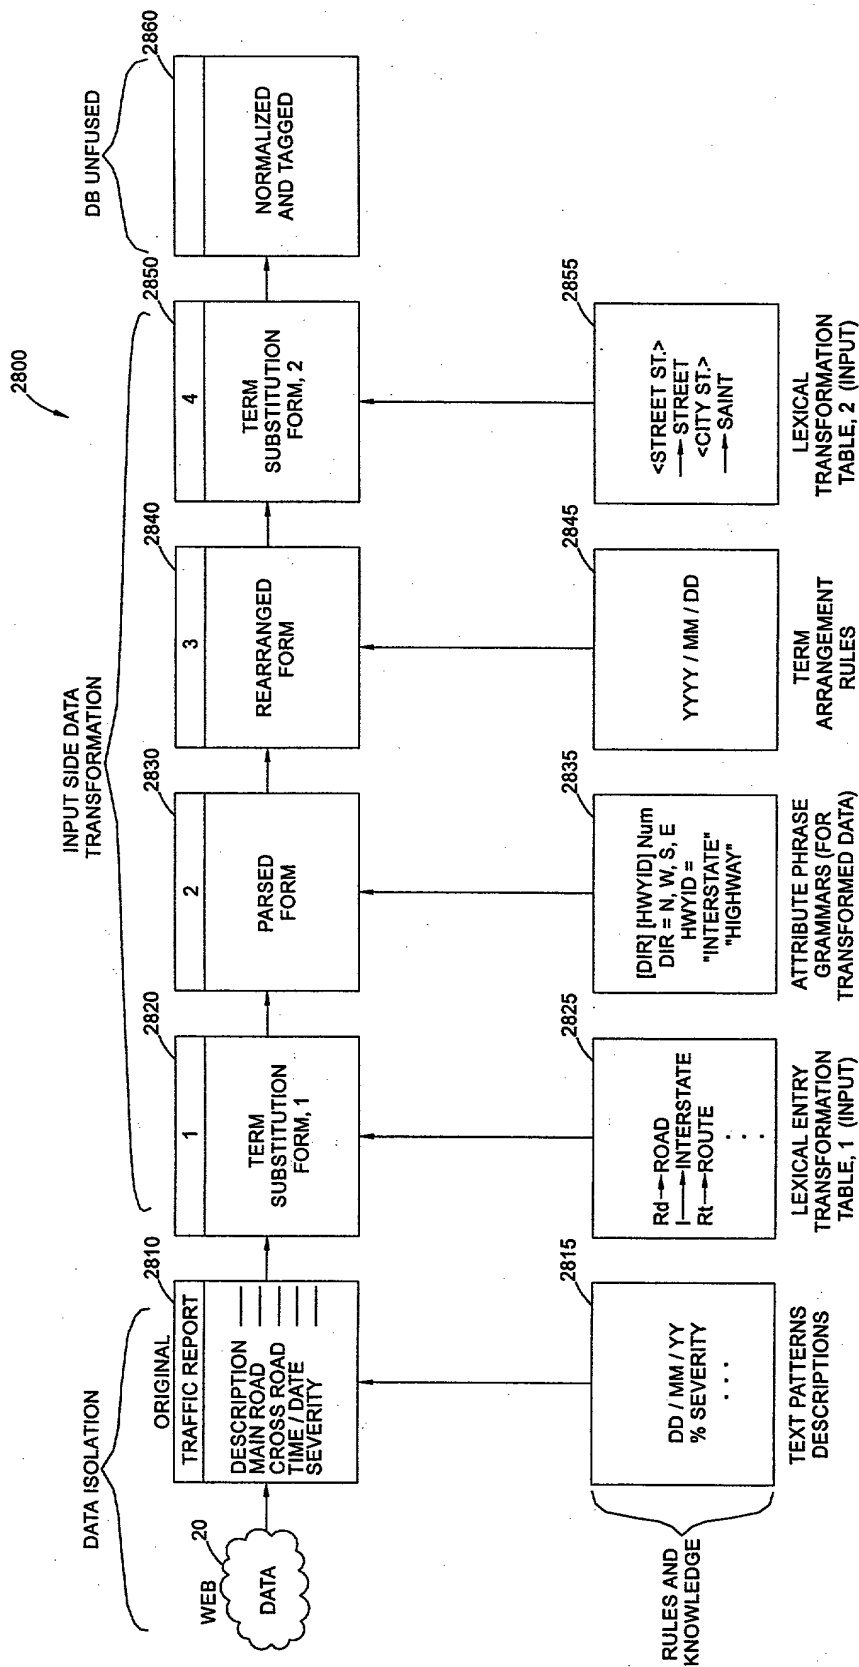


FIG. 28

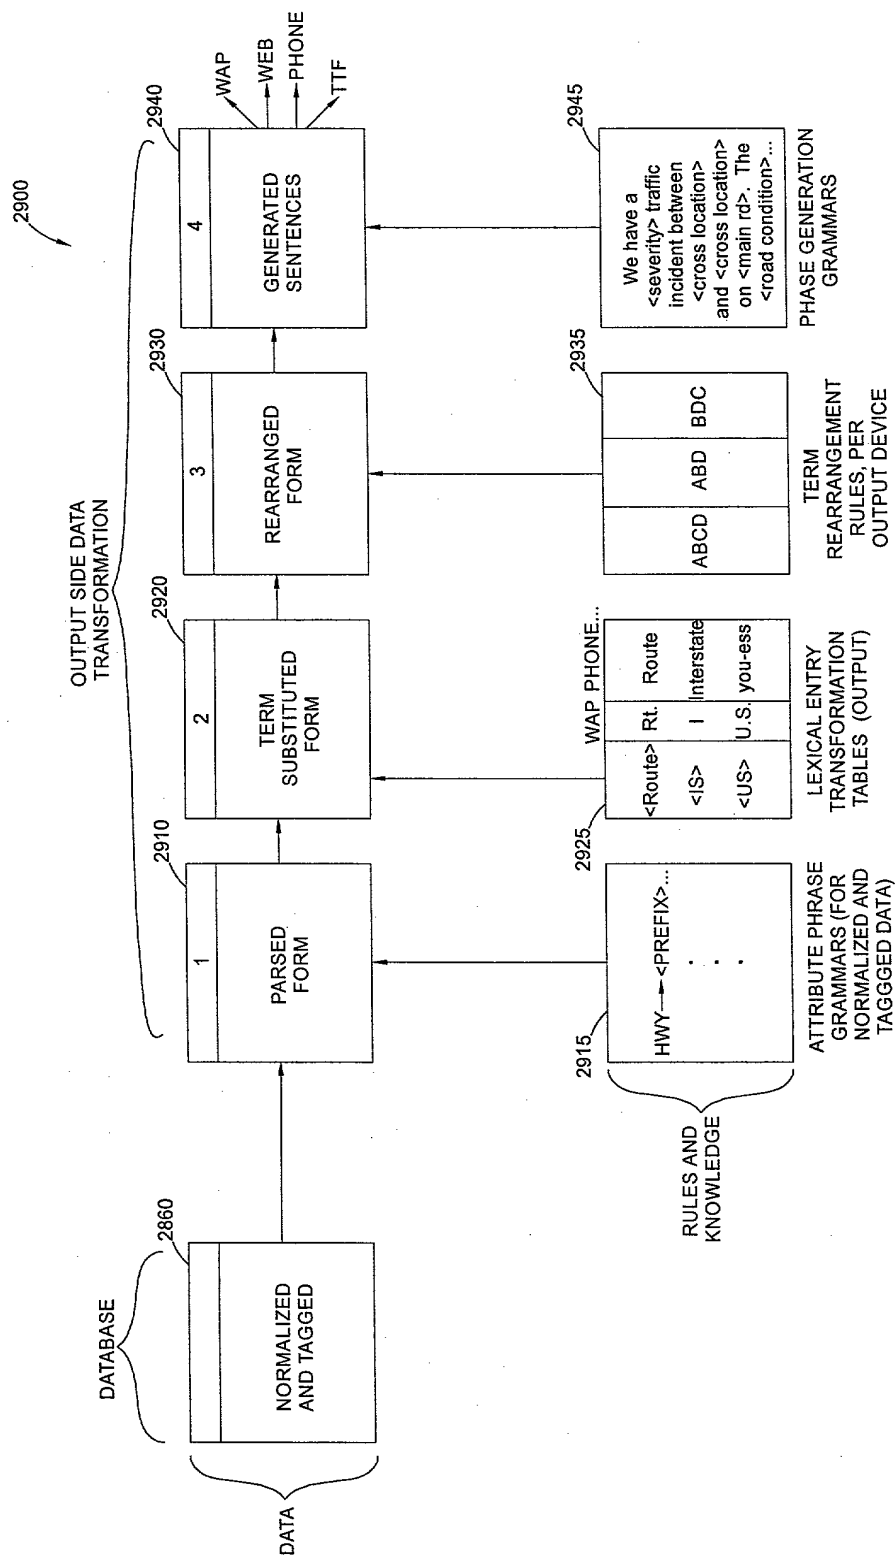


FIG. 29

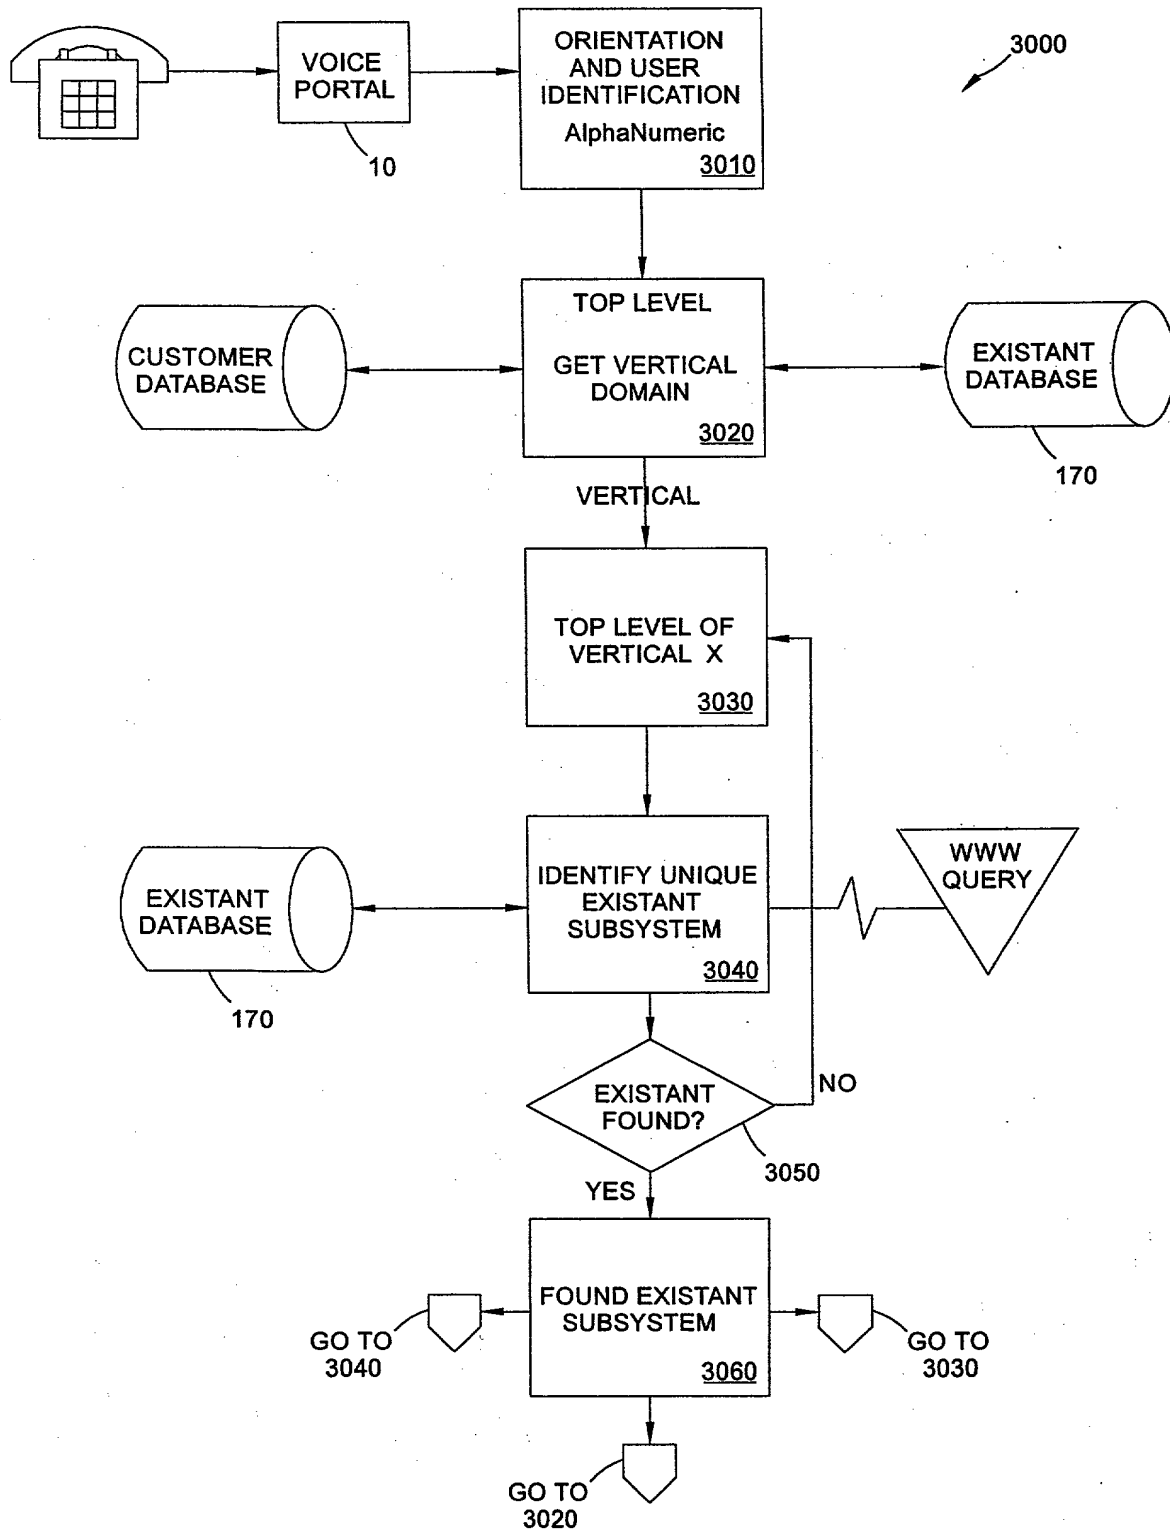


FIG. 30

00122015618550

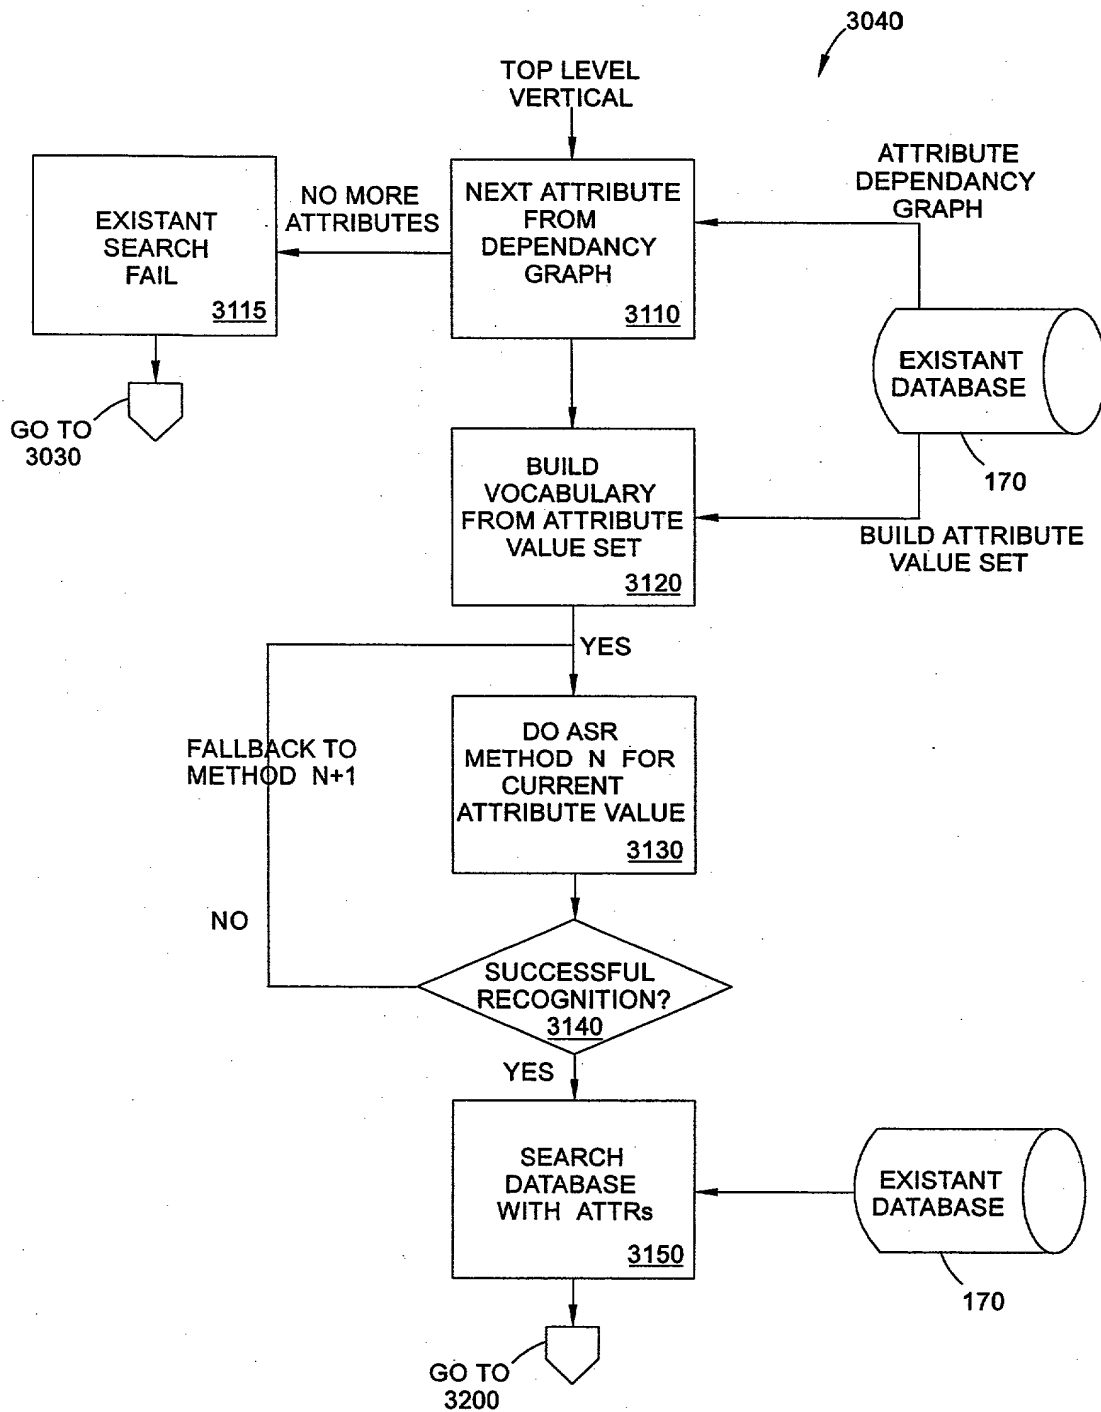


FIG. 31

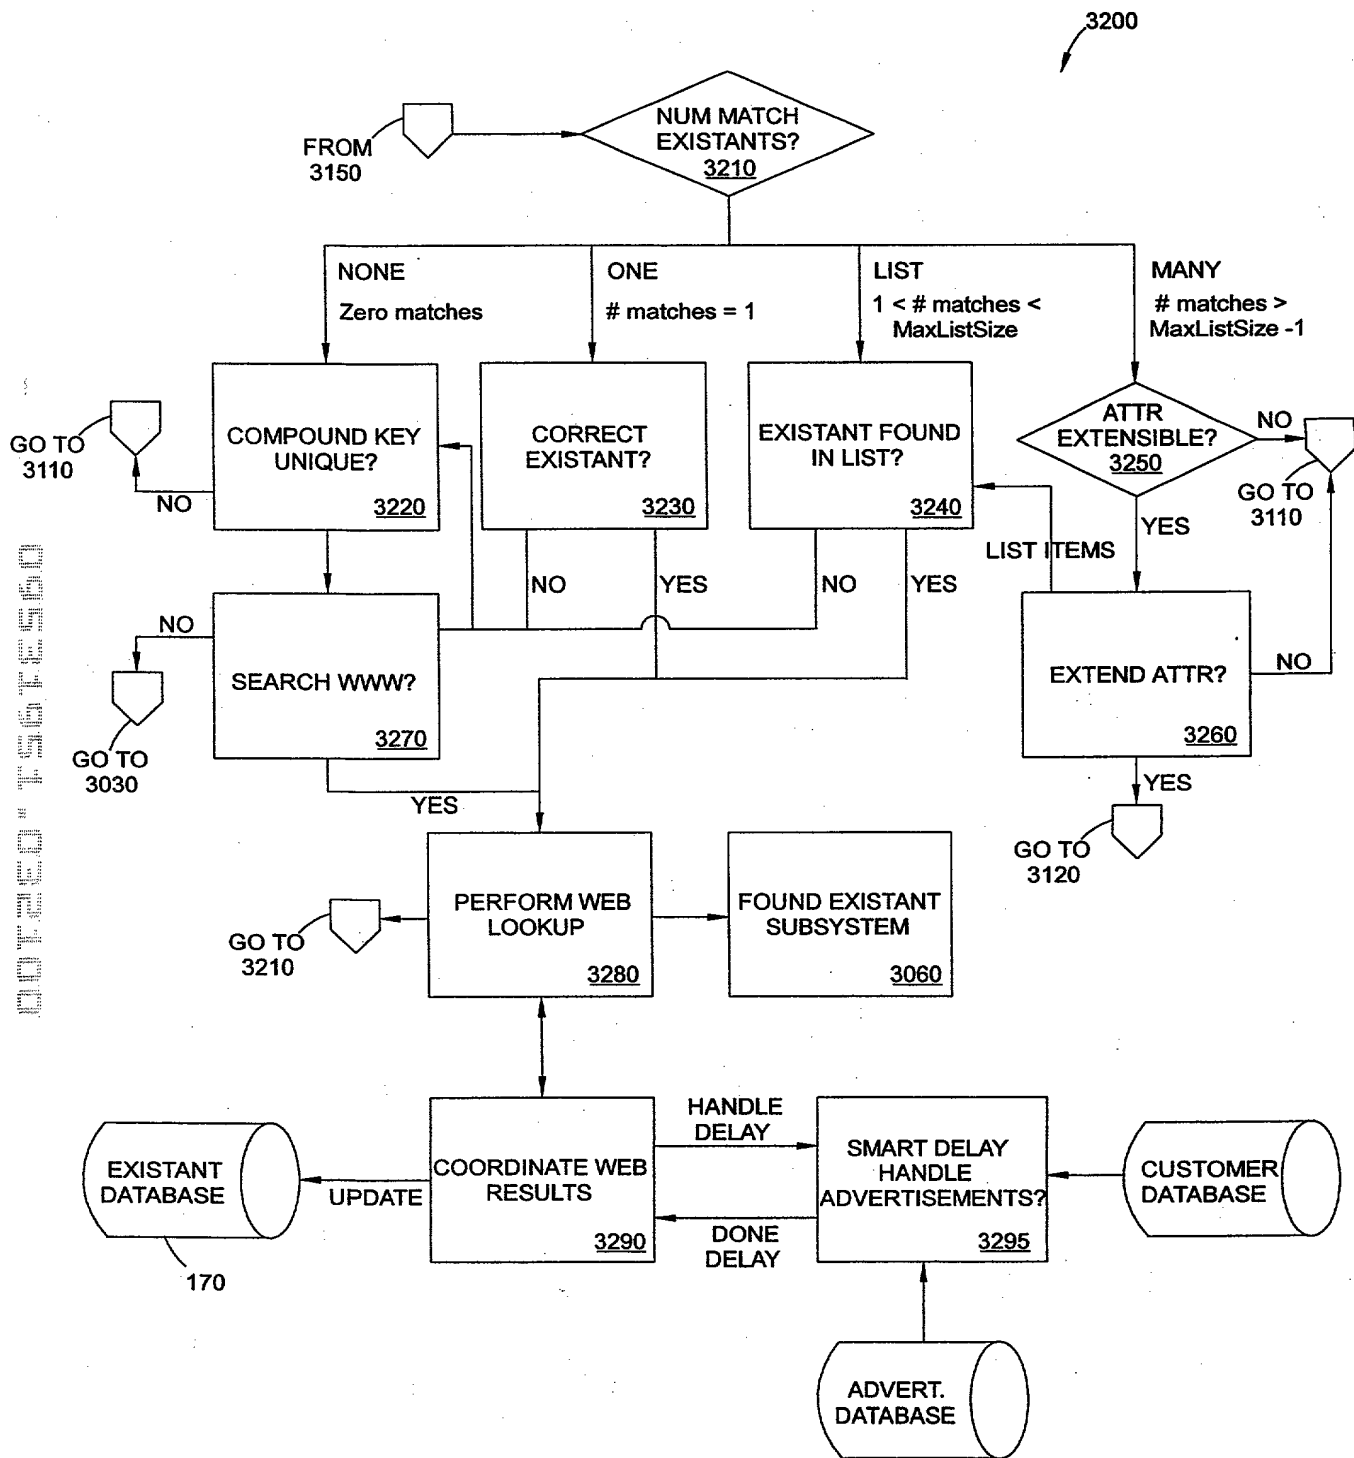


FIG. 32

001201561550

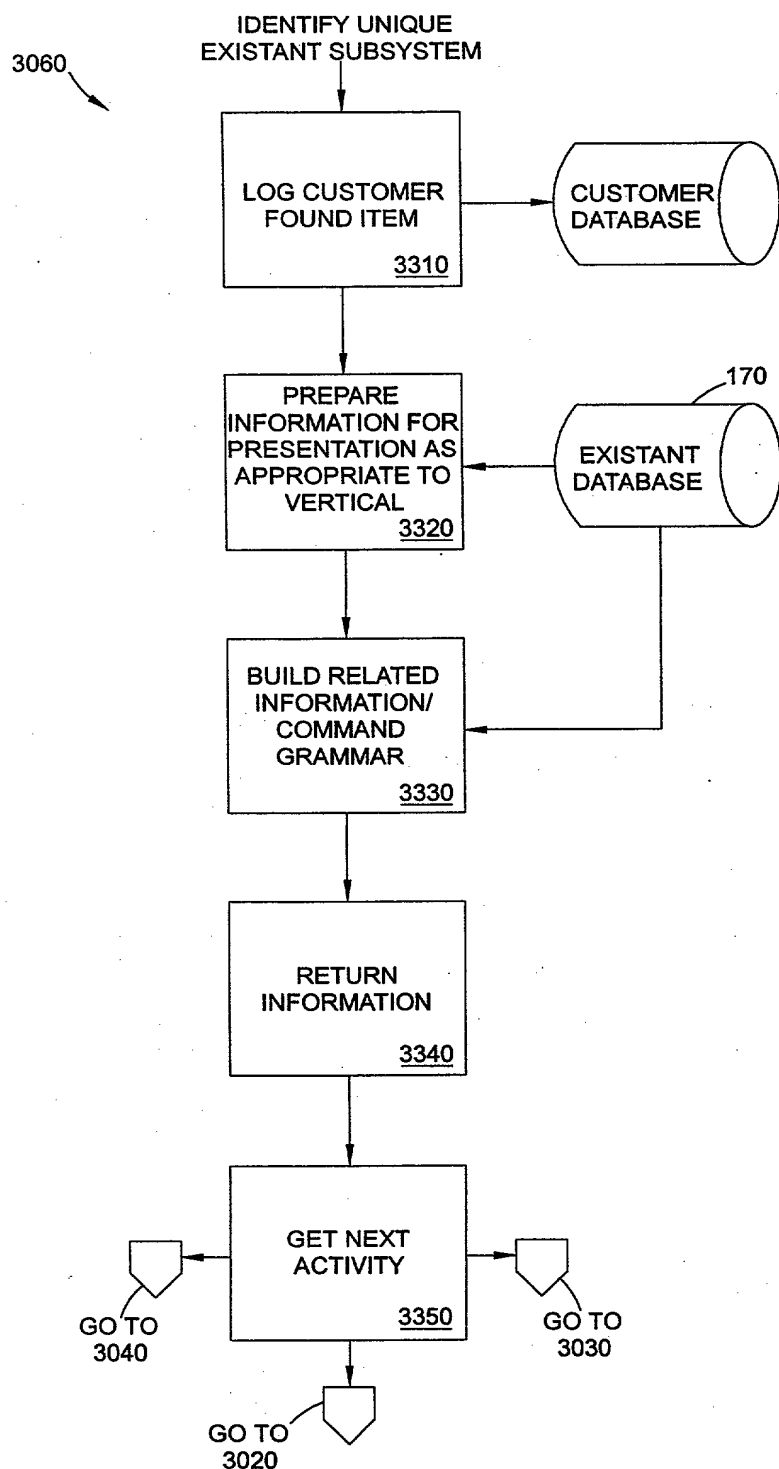


FIG. 33

3400

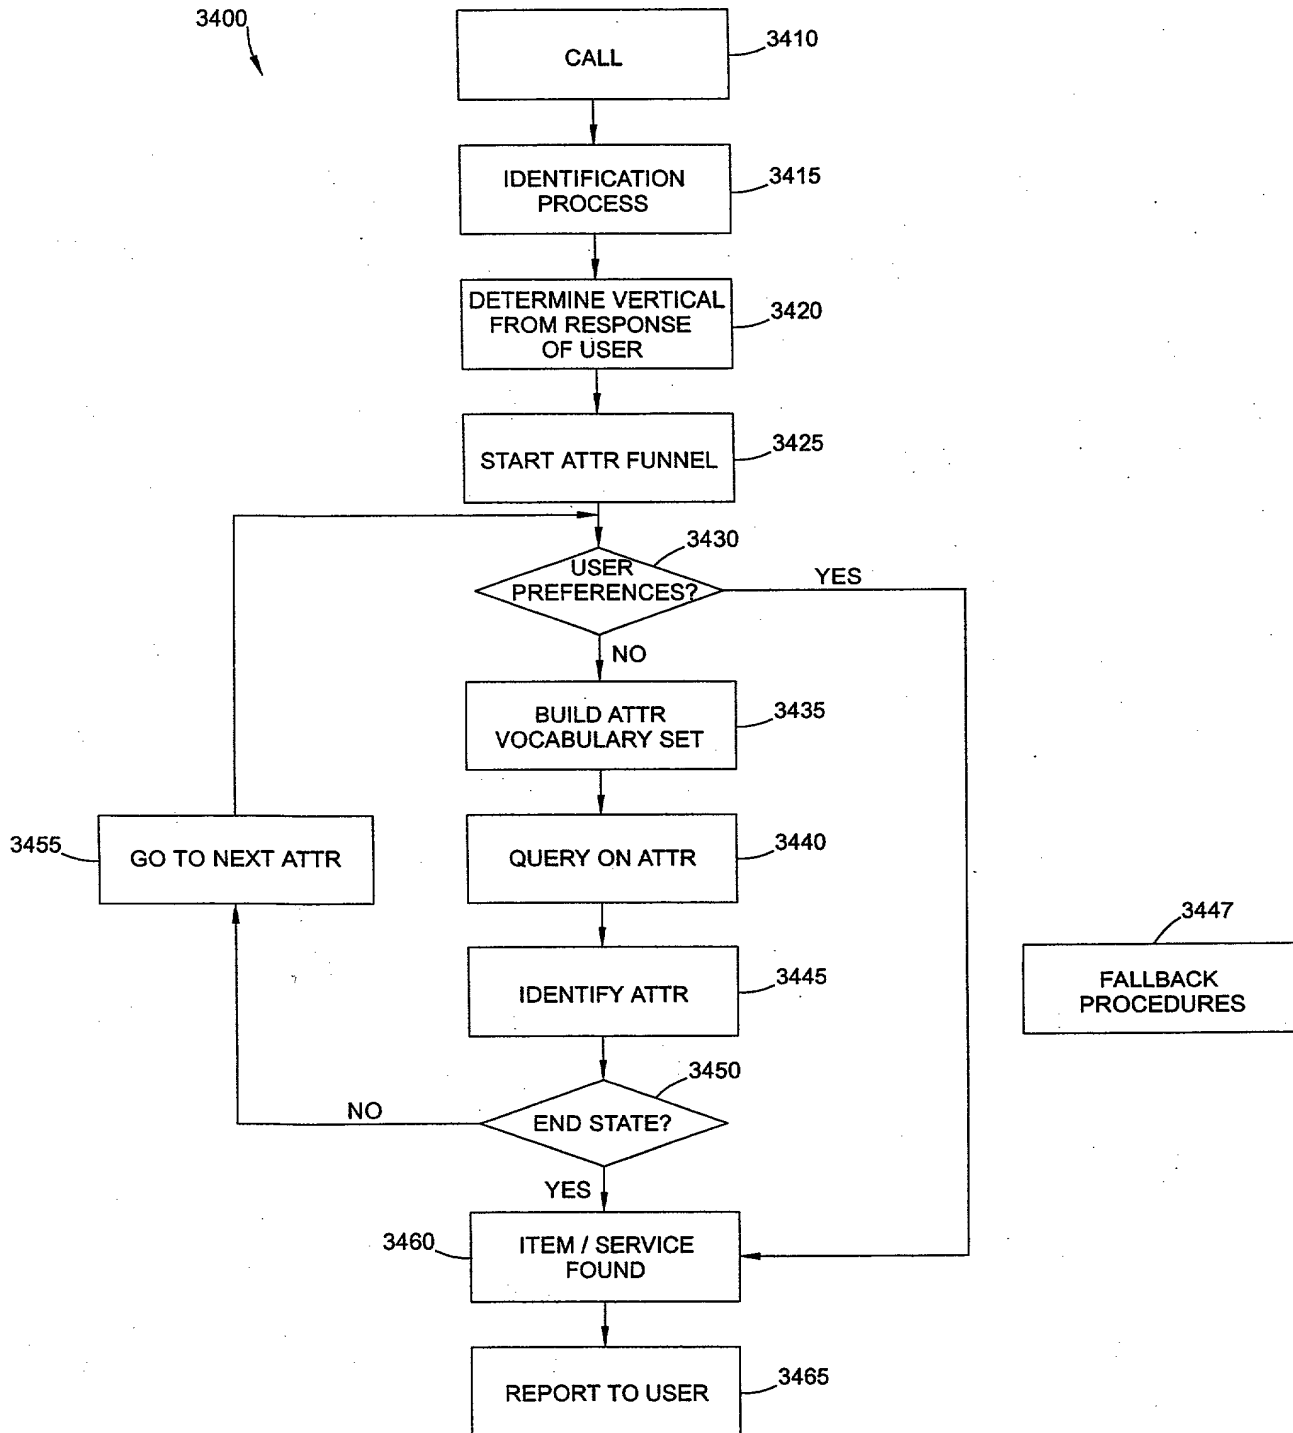


FIG. 34

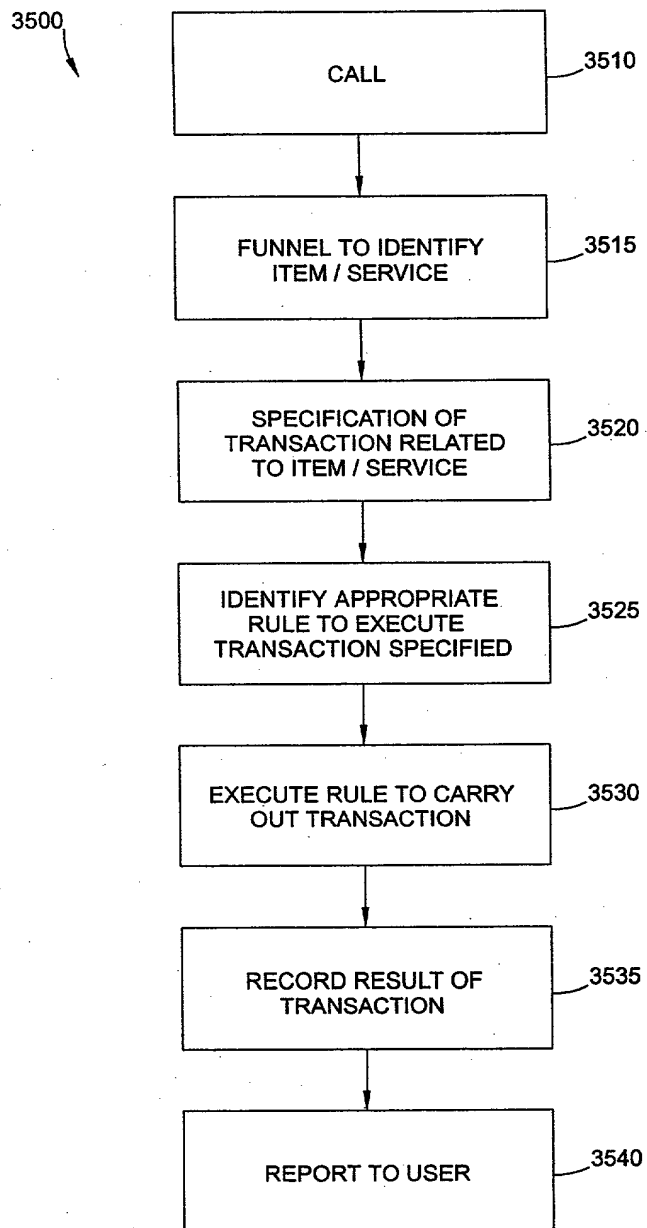


FIG. 35

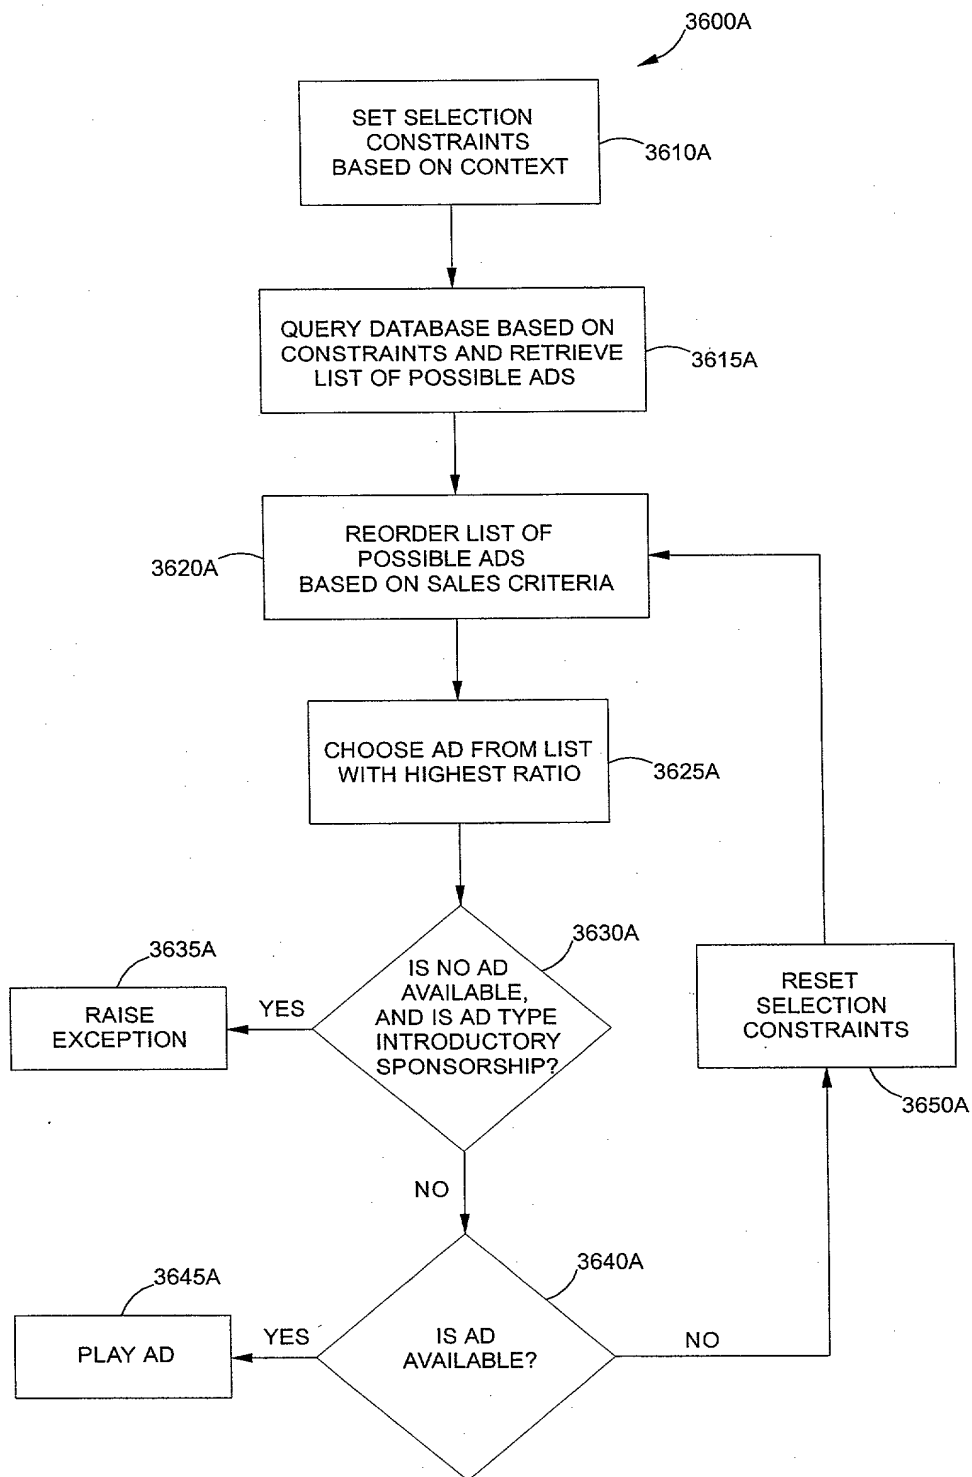


FIG. 36A

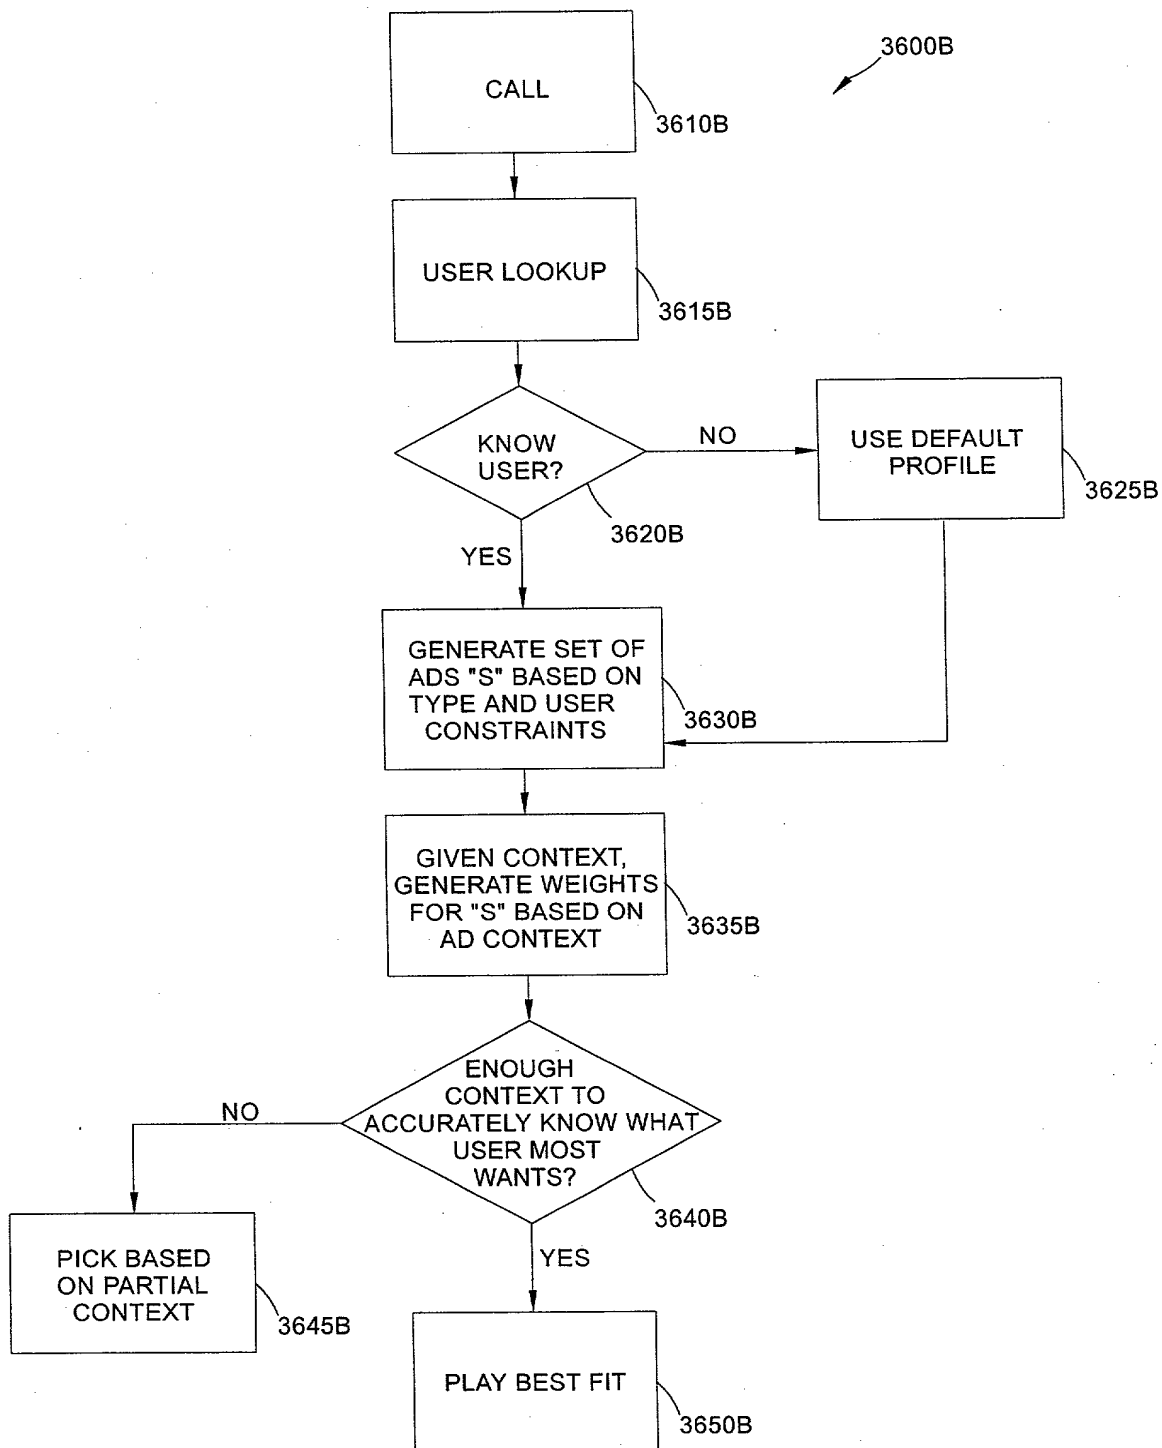


FIG. 36B


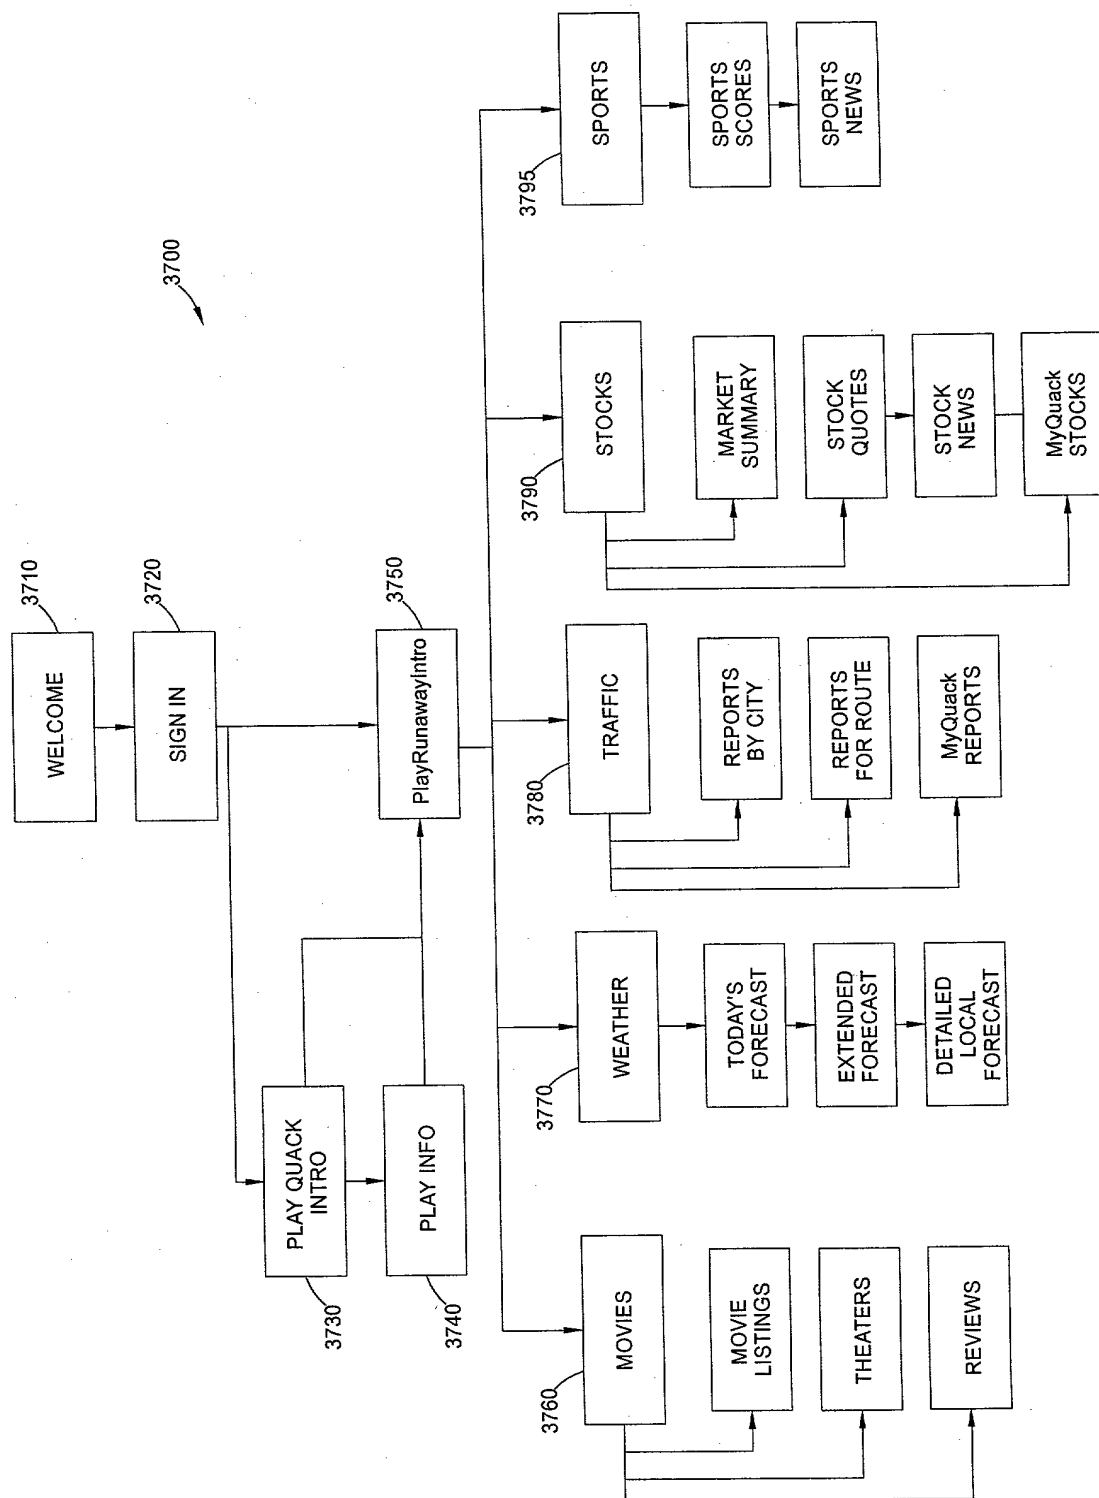


FIG. 37

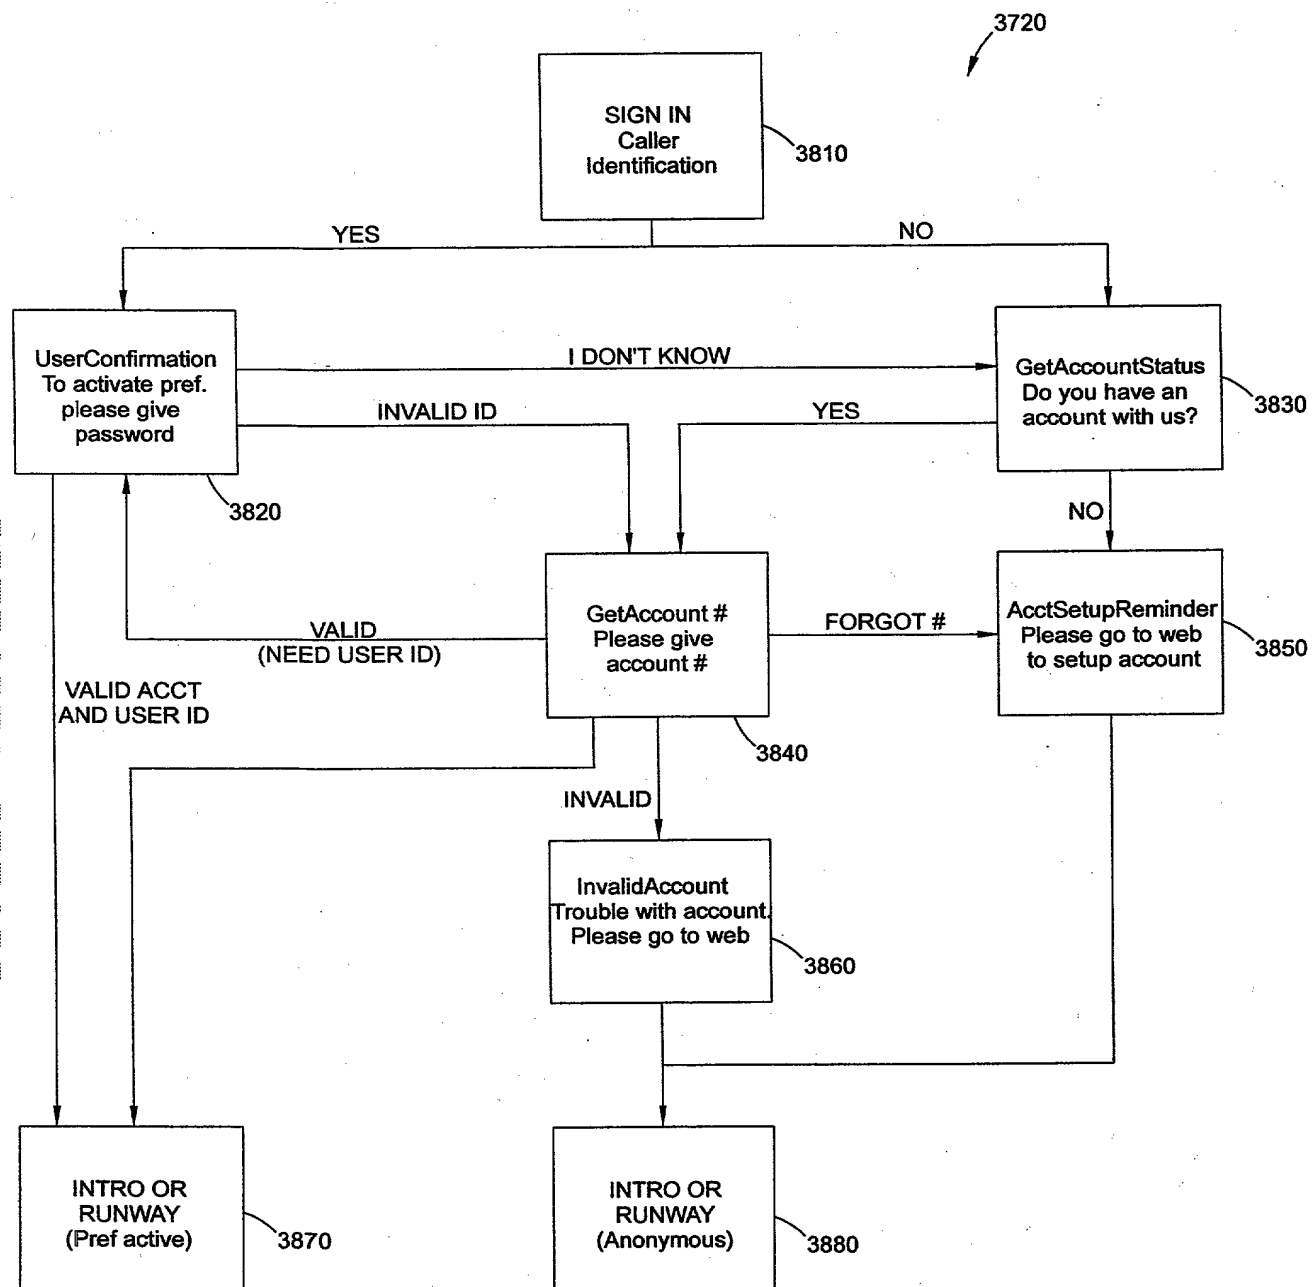

DOCTED 11/11/99

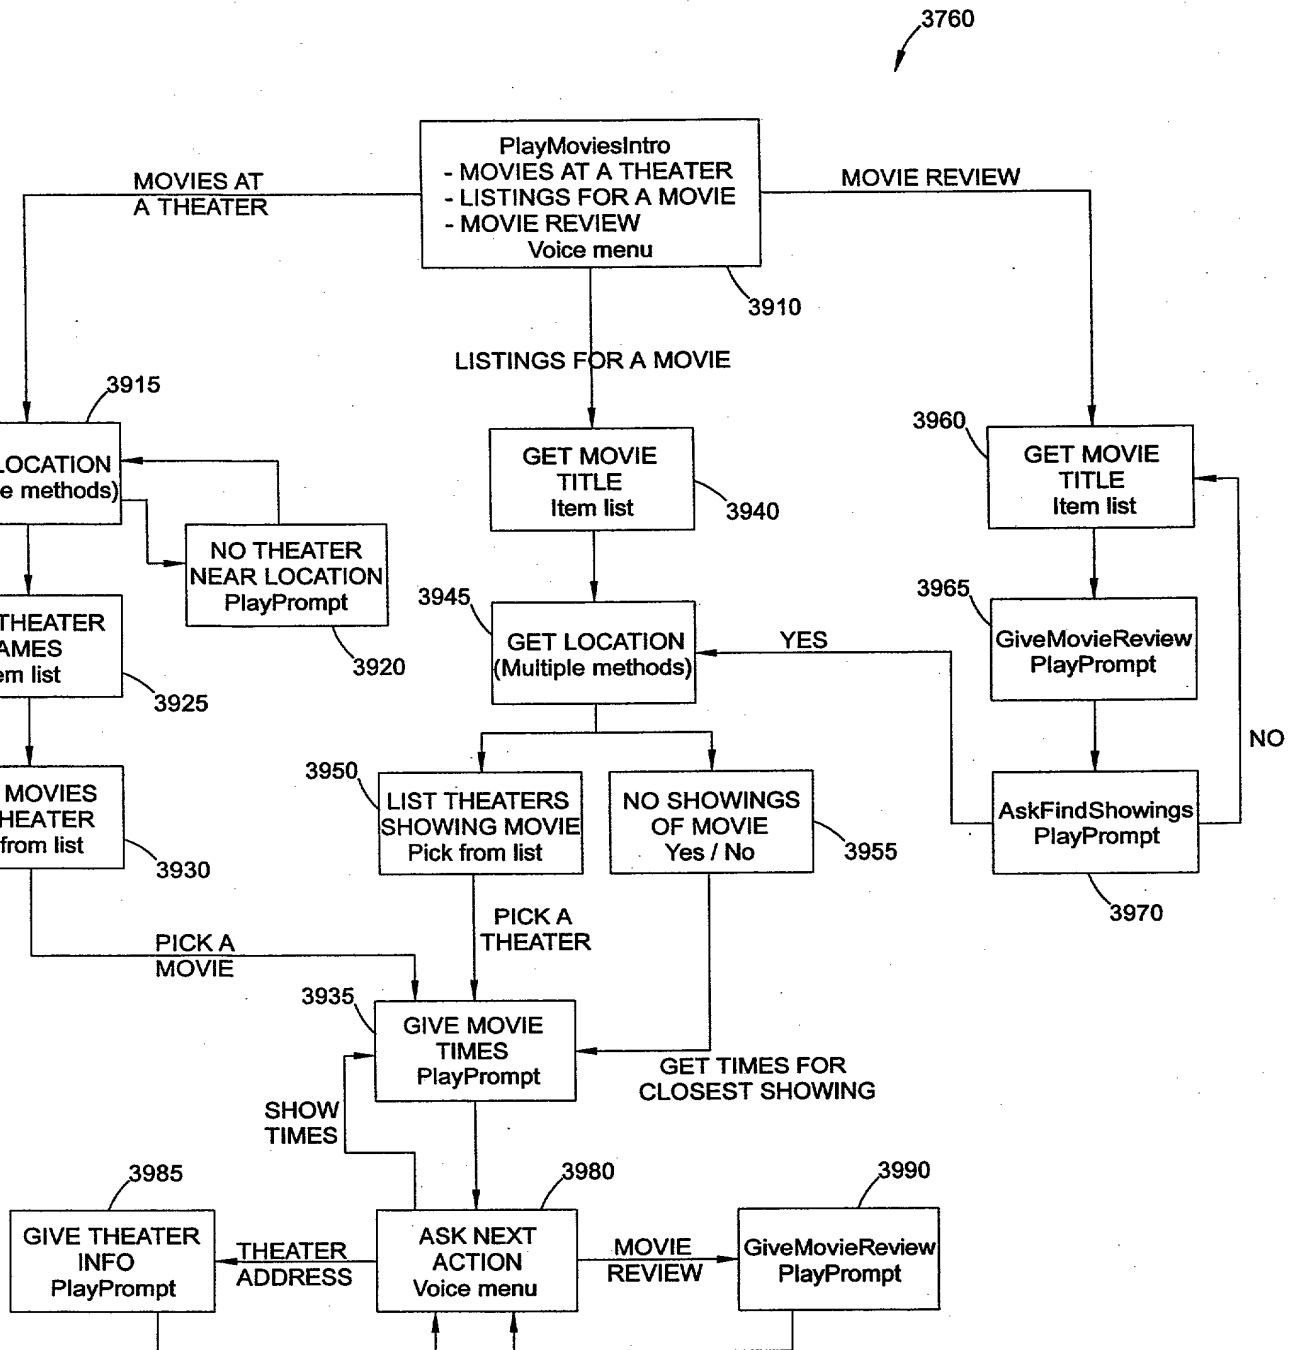


FIG. 39

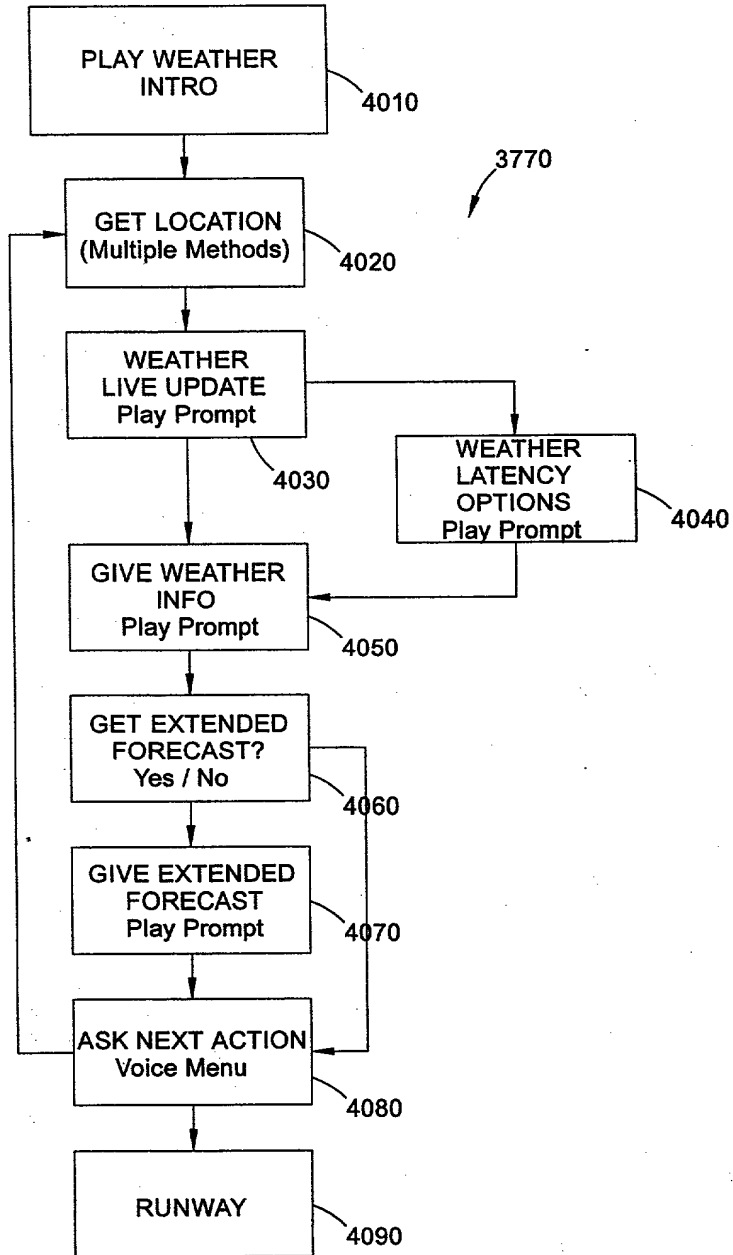


FIG. 40

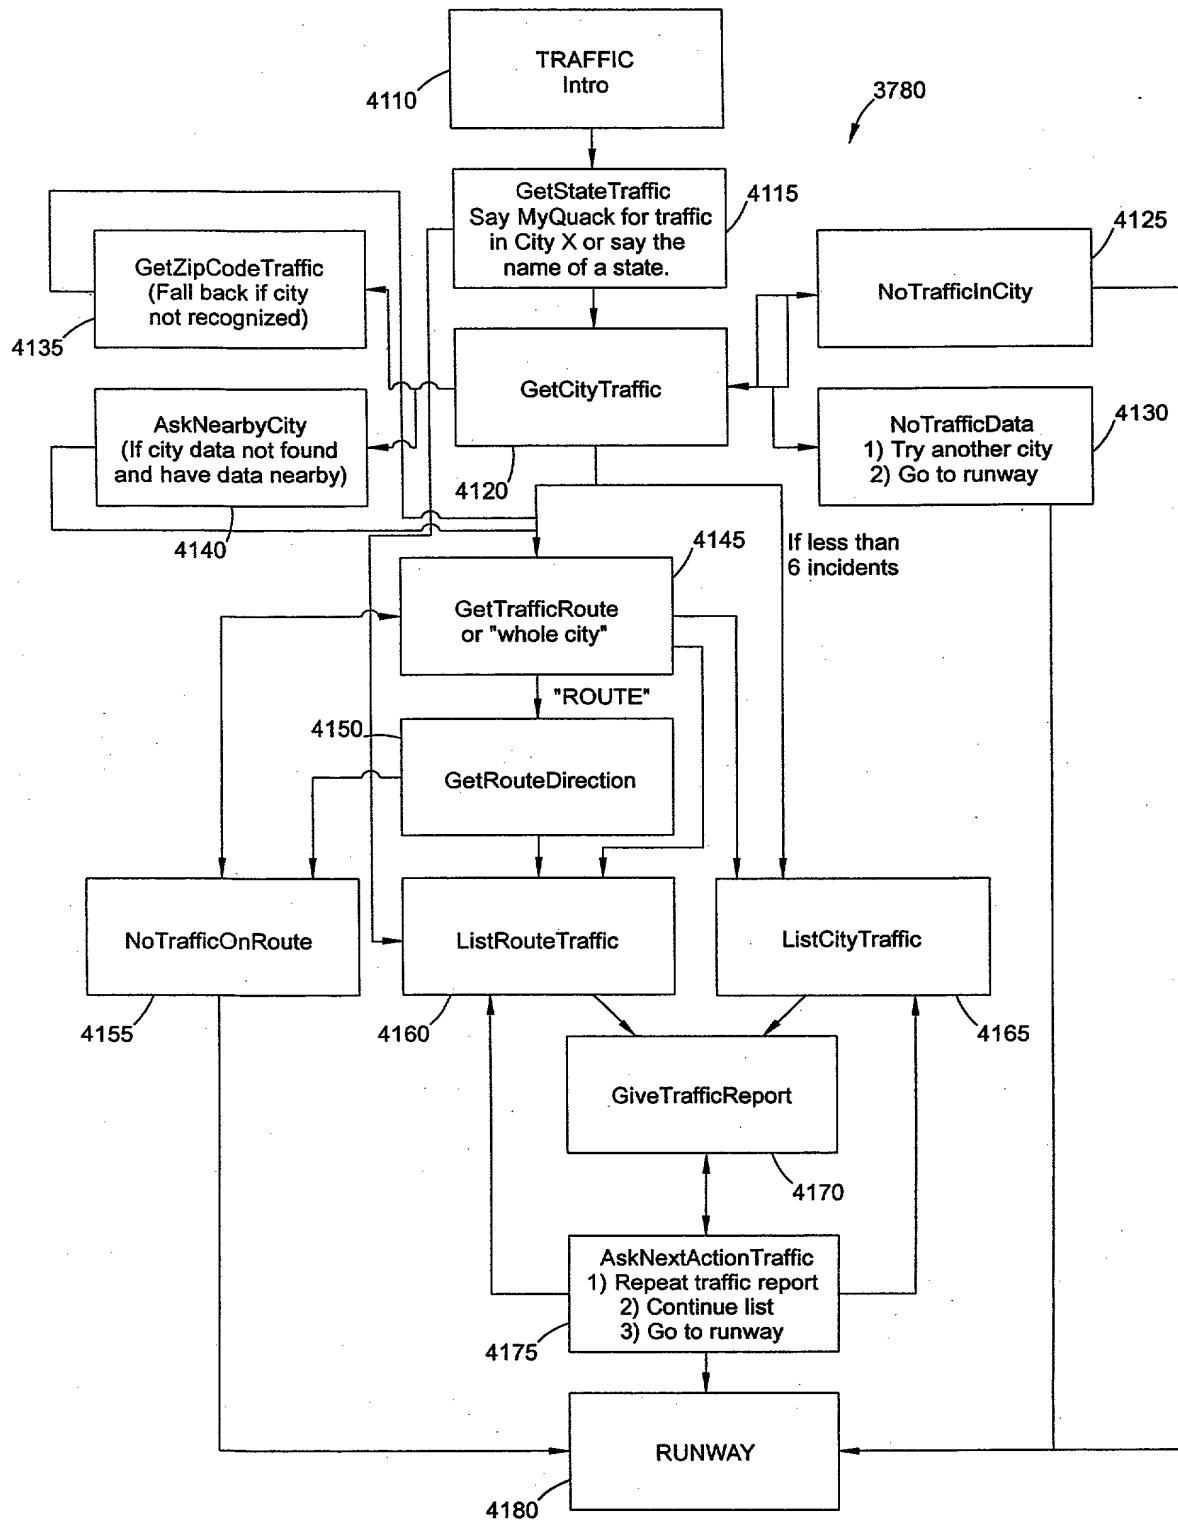


FIG. 41

001220 1567550

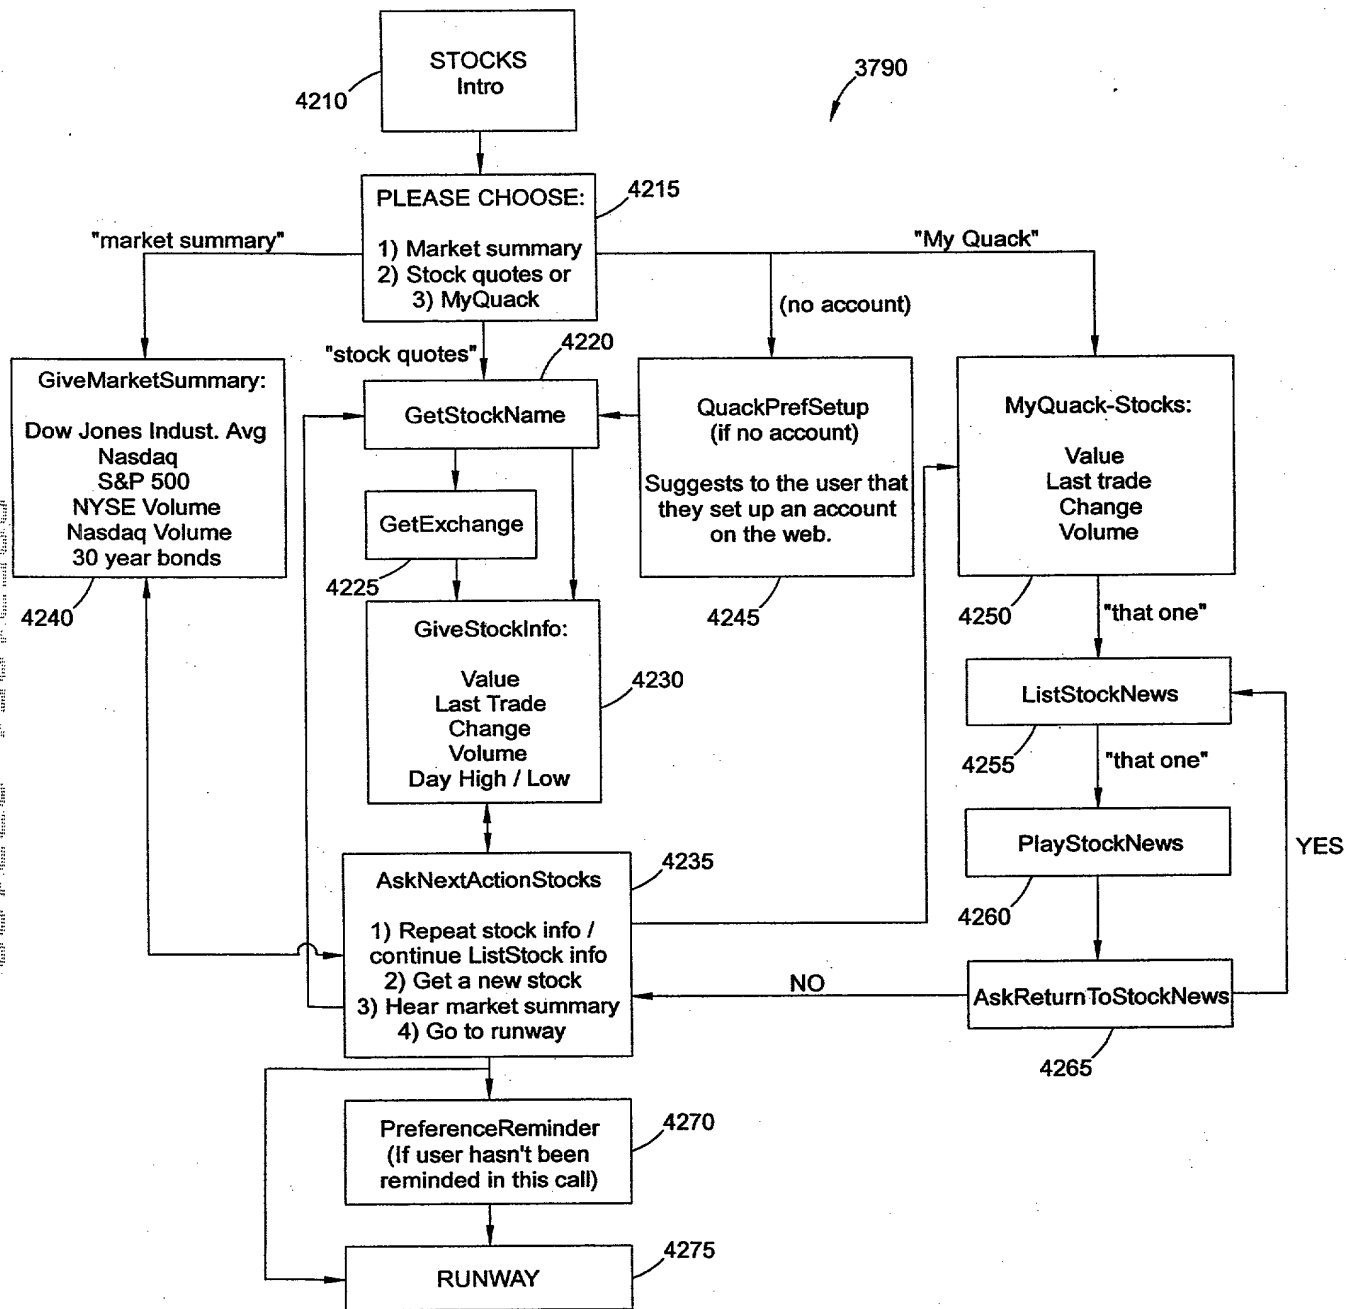


FIG. 42

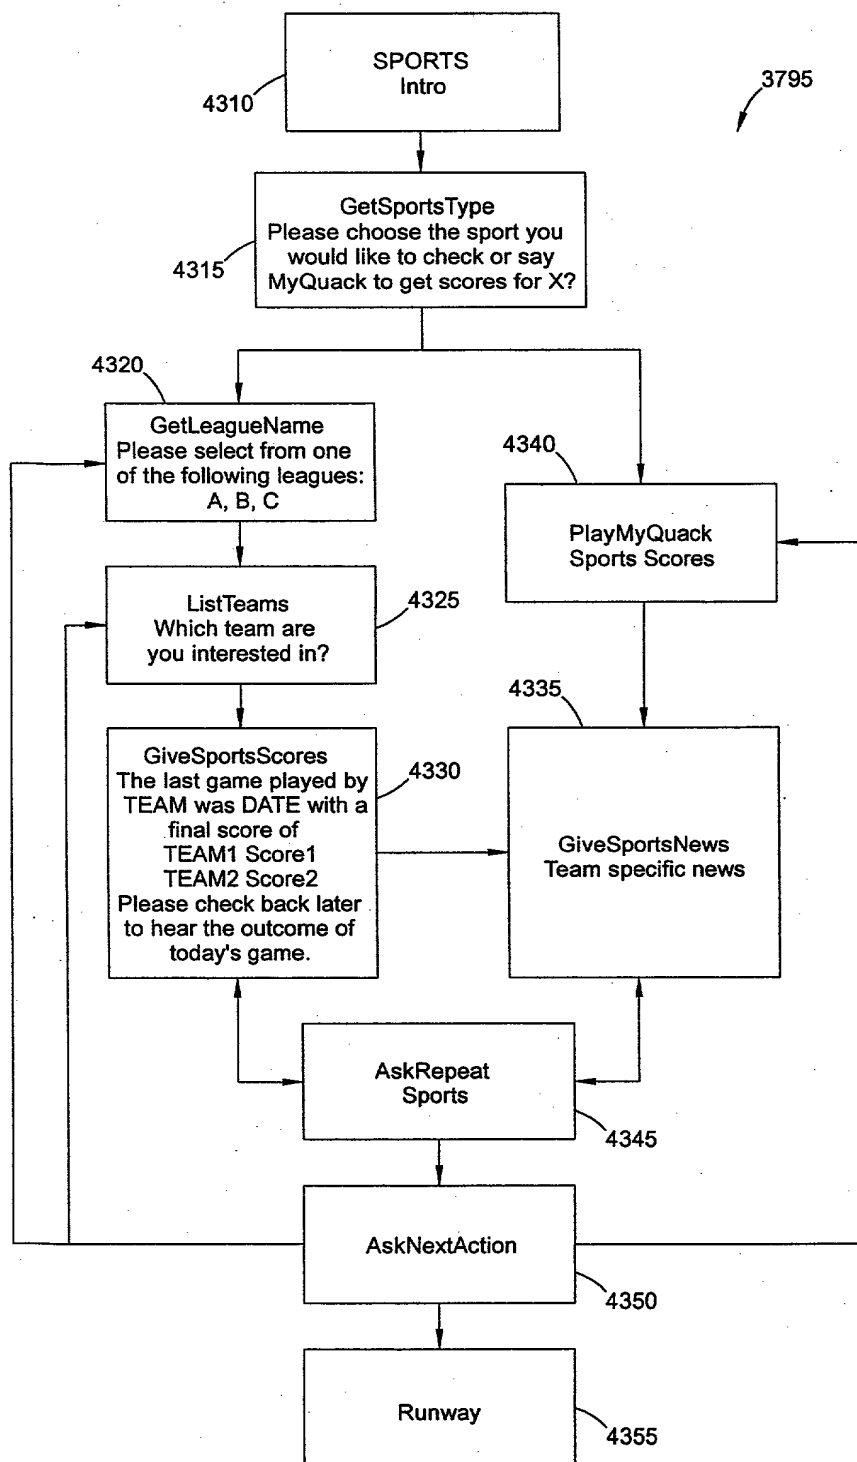


FIG. 43

Atty. Dkt. No. 57921/105

DECLARATION AND POWER OF ATTORNEY

As a below named inventor, I HEREBY DECLARE:

THAT my residence, post office address, and citizenship are as stated below next to my name;

THAT I believe I am the original, first, and sole inventor (if only one inventor is named below) or an original, first, and joint inventor (if plural inventors are named below or in an attached Declaration) of the subject matter which is claimed and for which a patent is sought on the invention entitled

SYSTEM AND METHOD FOR ADVERTISING WITH AN INTERNET VOICE PORTAL

(Attorney Docket No. 57921/105)

the specification of which (check one)

X is attached hereto.

_____ was filed on _____ as United States Application Number or PCT International Application Number _____ and was amended on _____ (if applicable).

THAT I do not know and do not believe that the same invention was ever known or used by others in the United States of America, or was patented or described in any printed publication in any country, before I (we) invented it;

THAT I do not know and do not believe that the same invention was patented or described in any printed publication in any country, or in public use or on sale in the United States of America, for more than one year prior to the filing date of this United States application;

THAT I do not know and do not believe that the same invention was first patented or made the subject of an inventor's certificate that issued in any country foreign to the United States of America before the filing date of this United States application if the foreign application was filed by me (us), or by my (our) legal representatives or assigns, more than twelve months (six months for design patents) prior to the filing date of this United States application;

THAT I have reviewed and understand the contents of the above-identified specification, including the claim(s), as amended by any amendment specifically referred to above;

THAT I believe that the above-identified specification contains a written description of the invention, and of the manner and process of making and using it, in such full, clear, concise, and exact terms as to enable any person skilled in the art to which it pertains, or with which it is most nearly connected, to make and use the invention, and sets forth the best mode contemplated by me of carrying out the invention; and

THAT I acknowledge the duty to disclose to the U.S. Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, §1.56.

Atty. Dkt. No. 57921/105

I HEREBY CLAIM foreign priority benefits under Title 35, United States Code § 119(a)-(d) or § 365(b) of any foreign application(s) for patent or inventor's certificate, or § 365(a) of any PCT international application which designated at least one country other than the United States of America, listed below and have also identified below any foreign application for patent or inventor's certificate or of any PCT international application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application Number	Country	Foreign Filing Date	Priority Claimed?	Certified Copy Attached?

I HEREBY CLAIM the benefit under Title 35, United States Code § 119(e) of any United States provisional application(s) listed below.

U.S. Provisional Application Number	Filing Date

I HEREBY CLAIM the benefit under Title 35, United States Code, § 120 of any United States application(s), or § 365(c) of any PCT international application designating the United States of America, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of Title 35, United States Code, § 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, § 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application.

U.S. Parent Application Number	PCT Parent Application Number	Parent Filing Date	Parent Patent Number

I HEREBY APPOINT the following registered attorneys and agents of the law firm of FOLEY & LARDNER to have full power to prosecute this application and any continuations, divisions, reissues, and reexaminations thereof, to receive the patent, and to transact all business in the United States Patent and Trademark Office connected therewith:

RUSSELL J. BARRON
DAVID J. BATES
STEVEN C. BECKER
DOUGLAS A. BOEHM
EDWARD W. BROWN
LISA A. BRZYCKI
CHARLES G. CARTER

Reg. No. 29,512
Reg. No. 39,902
Reg. No. 42,308
Reg. No. 32,014
Reg. No. 22,022
Reg. No. 40,926
Reg. No. 35,093

Atty. Dkt. No. 57921/105

ALISTAIR K. CHAN	Reg. No. 44,603
JOHN C. COOPER III	Reg. No. 26,416
JEFFREY N. COSTAKOS	Reg. No. 34,144
WILLIAM J. DICK	Reg. No. 22,205
BARRY L. GROSSMAN	Reg. No. 30,844
PAUL S. HUNTER	Reg. No. 44,787
KATHERINE D. LEE	Reg. No. 44,885
KEITH D. LINDENBAUM	Reg. No. 40,365
DAVID G. LUETTGEN	Reg. No. 39,282
RICHARD J. MC KENNA	Reg. No. 35,610
JAMES G. MORROW	Reg. No. 32,505
RICHARD B. O'PLANICK	Reg. No. 29,096
TODD A. RATHE	Reg. No. 38,276
MICHAEL D. RECHTIN	Reg. No. 30,128
CHRISTOPHER M. TUROSKI	Reg. No. 44,456
JAMES A. WILKE	Reg. No. 34,279
JOSEPH N. ZIEBERT	Reg. No. 35,421
WALTER E. ZIMMERMAN	Reg. No. 40,883


and I request that all correspondence be directed to:

Paul S. Hunter
 FOLEY & LARDNER
 Firstar Center
 777 East Wisconsin Avenue
 Milwaukee, Wisconsin 53202-5367

Telephone: (414) 297-5728
 Facsimile: (414) 297-4900

I UNDERSTAND AND AGREE THAT the foregoing attorneys and agents appointed by me to prosecute this application do not personally represent me or my legal interests, but instead represent the interests of the legal owner(s) of the invention described in this application.

I FURTHER DECLARE THAT all statements made herein of my own knowledge are true, and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

Name of first inventor	Craig Douglas Voisin
Residence	Mountain View, CA
Citizenship	Canada
Post Office Address	651 Franklin Street, Apt. 4211, Mountain View, CA 94041
Inventor's signature	
Date	MARCH 17, 2000

001.743019.1

Atty. Dkt. No. 57921/105

Name of second inventor

Residence

Citizenship

Post Office Address

Inventor's signature

Date


Matthew Nelson Armstrong

San Francisco, CA

Canada

175 Bluxome Street, Apt. 104, San Francisco, CA

94107


MARCH 17, 2000

Name of third inventor

Residence

Citizenship

Post Office Address

Inventor's signature

Date


Steven Jeromy Carriere

Mountain View, CA

Canada

651 Franklin Street, Apt. 4302, Mountain View, CA

94041


March 17, 2000

Name of fourth inventor

Residence

Citizenship

Post Office Address

Inventor's signature

Date


Steven Gregory Woods

Mountain View, CA

Canada

900 High School Way, Apt. 2320, Mountain View, CA

94041


MARCH 17, 2000

Name of fifth inventor

Residence

Citizenship

Post Office Address

Inventor's signature


Date

Alexander E. Quilici

Santa Monica, CA

United States of America

1044 9th Street, Suite #5, Santa Monica, CA 90403


March 17, 2000